
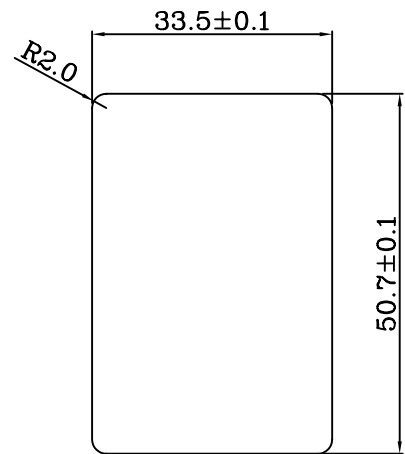
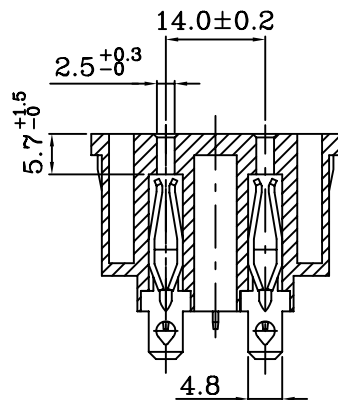
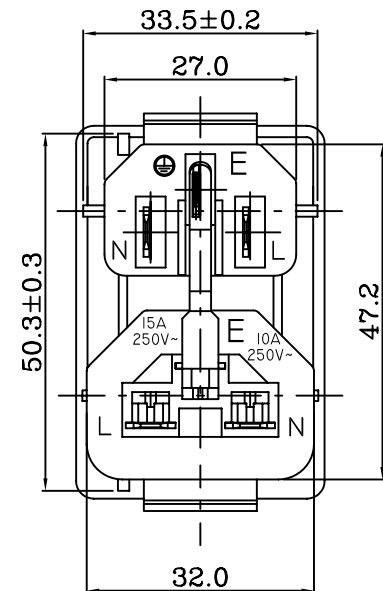
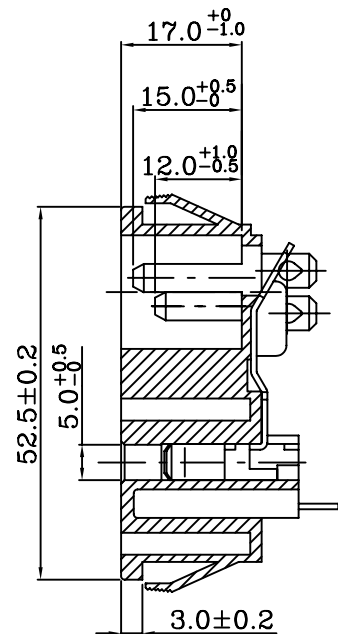


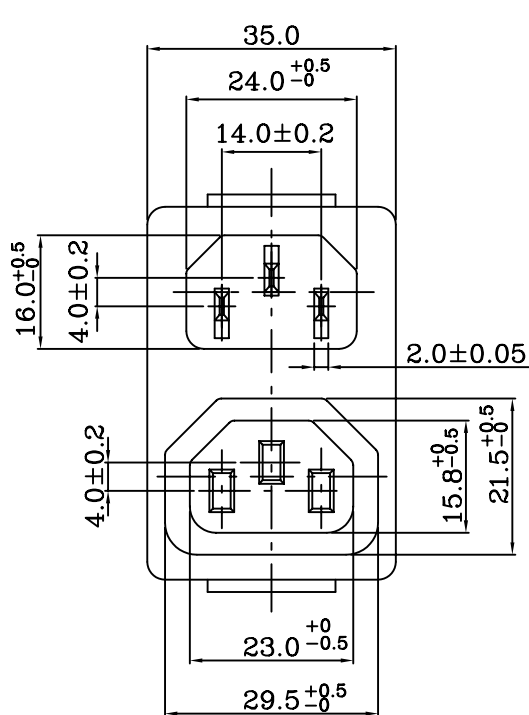

PANEL CUT-OUT

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Fiber Thermoplastic . UL 94V-2~0

Rating:AC 15A 250V	
Mark	Safety Regulation
UL	UL
cUL	CUL
Rating:AC 10A 250V	
Mark	Safety Regulation
CCC	CCC


IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



DRAWN BY

李
2007.7.16
小英

UNIT

mm

UNIT Q'TY

1

SCALE

1 : 1

APPROVED BY

林
2007.7.16
達忠

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO

07071601Q

DESCRIPTION

PRODUCT NO.

SWR-3012(B00)

INTERIM NO.

NEW NO.

REV

A