

## Tilt Sensor Switch

Item No.	SRBS330310	Description	Photoelectric	Version	14
Page	1 of 9	Publish Date	May. 31, 2018		

### ● FUNCTION

1. Tilt Angles: 45° within a 360° radius.
2. Suitable for horizontal PCB.
3. Vibration Detecting



### ● APPLICATIONS

1. Automatically shut off for home appliances
2. Automatically shut off for Sporting equipment
3. Alarm system
4. Anti-theft / Anti-tamper devices
5. Being motion detection (personal locator)
6. Wake up systems for power saving, such like remote controllers
7. Automatically shut off for motorbike tilt
8. Earthquake Detecting

### ● FEATURES

1. Housing made of high insulation plastic material, free from electric conduction and rust problem.
2. Detecting with photo transistors, generating highly reliable and stable signals.
3. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
4. Simple ON and OFF signals, easy for design.
5. RoHS compliance, an ideal substitute for mercury switch.
6. A more economical tilt and vibration detection option than IC design solution.
7. All made in Taiwan and examined before shipment.




## Tilt Sensor Switch

Item No.	SRBS330310	Description	Photoelectric	Version	14
Page	3 of 9		Publish Date	May. 31, 2018	

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance:  $\pm 0.25\text{mm}$ )

Fig. 1

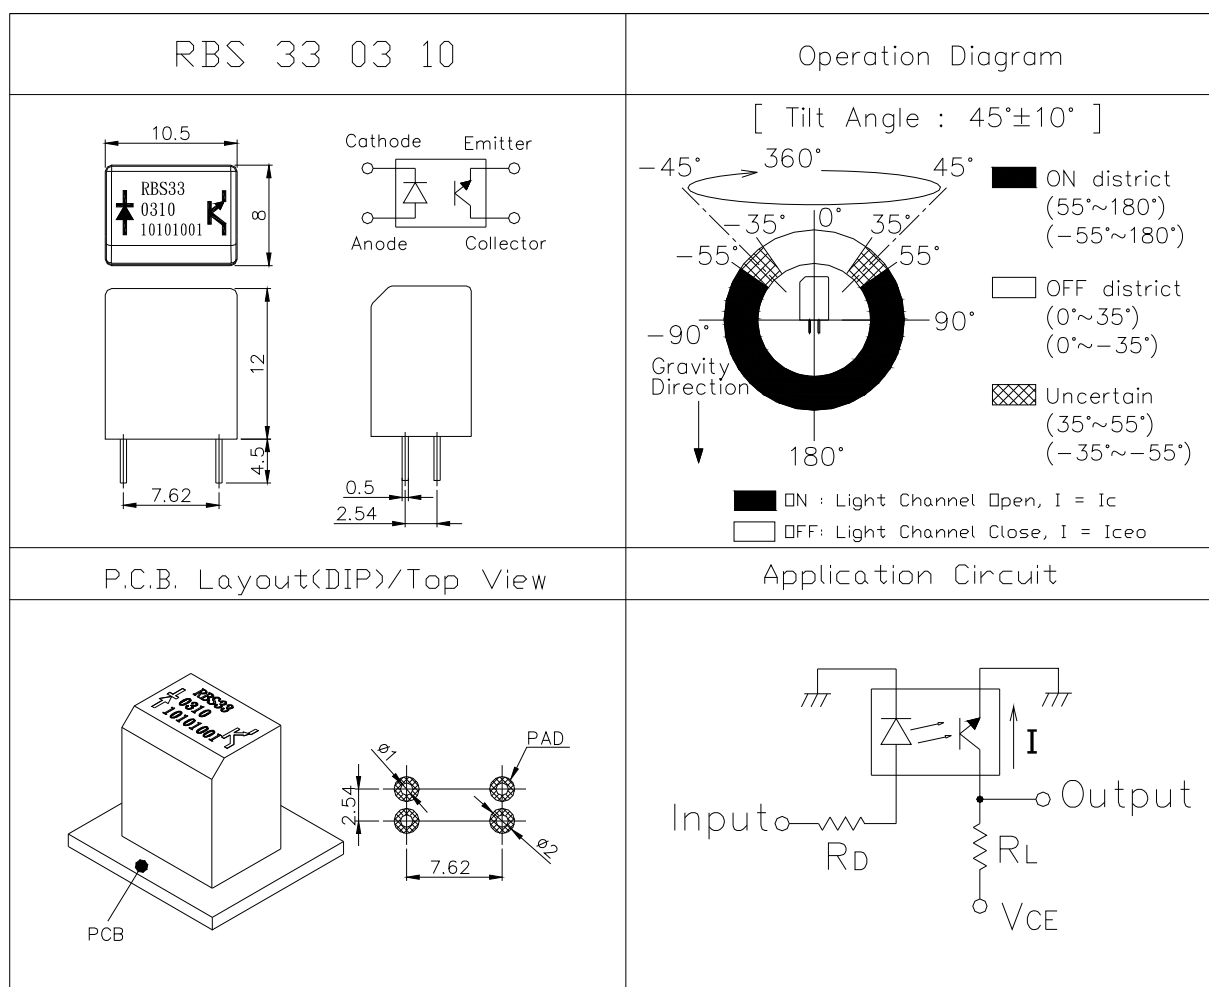

## Tilt Sensor Switch

Item No.	SRBS330310	Description	Photoelectric	Version	14
Page	4 of 9		Publish Date	May. 31, 2018	

### ● Current/Voltage Suggested

Input Current (mA)	Operating Voltage (V)	Condition
10	3.3	$V_{CE}=3.3V$ $R_D=200\text{ ohm}$ $R_L=100K\text{ ohm}$
10	5	$V_{CE}=5V$ $R_D=390\text{ ohm}$ $R_L=100K\text{ ohm}$

\* Please refer to above Application Circuit for designing electrical circuit.

### ● Absolute Maximum Rating ( $T_a=25^{\circ}C$ )

Item		Symbol	Rating	Unit
Input	Power Dissipation	$P_d$	75	mW
	Reverse Voltage	$V_R$	5	V
	Forward Current	$I_F$	50	mA
	Peak Forward Current (*1)	$I_{FP}$	1	A
Output	Collector Power Dissipation	$P_C$	100	mW
	Collector Current	$I_C$	20	mA
	C-E Voltage	$V_{CEO}$	30	V
	E-C Voltage	$V_{ECO}$	5	V
Operating Temperature		$T_{opr}$	-25~+85	$^{\circ}C$
Storage Temperature		$T_{stg}$	-40~+85	$^{\circ}C$
Soldering Temperature (*2)		$T_{sol}$	260	$^{\circ}C$

(\*1)  $t_w=100\text{ }\mu\text{Sec.}$  、  $T=10\text{ mSec.}$

(\*2) Please refer to soldering condition.



## Tilt Sensor Switch

Item No.	RBS330310 S	Description	Photoelectric	Version	14
Page	5 of 9		Publish Date	May. 31, 2018	

● Electrical Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	$V_F$	$I_F=20\text{mA}$	-	1.2	1.5	V
Reverse Current	$I_R$	$V_R=5\text{V}$	-	-	10	$\mu\text{A}$
Peak Wavelength	$\lambda_p$	$I_F=10\text{mA}$		940		nm
Dark Current	$I_{ceo}$	$V_{CE}=10\text{V}$	-	-	2	$\mu\text{A}$
C-E Saturation Voltage	$V_{CE}(\text{sat})$	$I_C=0.25\text{mA}$ $I_F=20\text{mA}$	-	-	0.4	V
Light Current	$I_C$	$V_{CE}=5\text{V}$ $I_F=20\text{mA}$	0.5	5	-	mA
Rise Time	$T_r$	$I_C=0.8\text{mA}$ $V_{CC}=30\text{V}$ $R_L=1\text{K}\Omega$	-	5	-	$\mu\text{sec}$
Fall Time	$T_f$		-	5	-	$\mu\text{sec}$
Operation Diagram	$\theta$	Fig. 1	35	45	55	°



## Tilt Sensor Switch

Item No.	SRBS330310	Description	Photoelectric	Version	14
Page	6 of 9		Publish Date	May. 31, 2018	

### ● Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Fig.1 Power Dissipation vs. Ambient Temperature

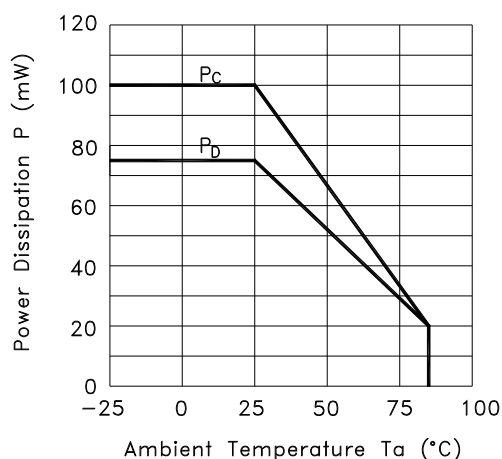


Fig.2 Forward Current vs. Forward Voltage

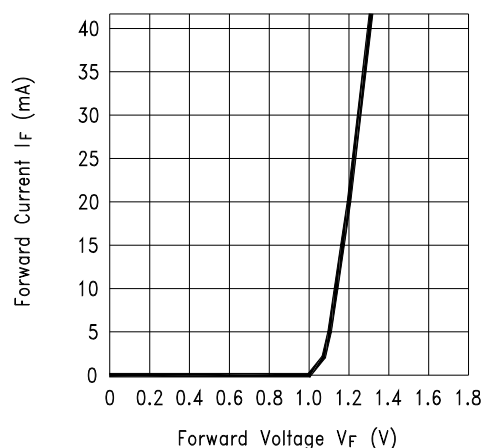


Fig.3 Collector Current vs. Collector-emitter Voltage


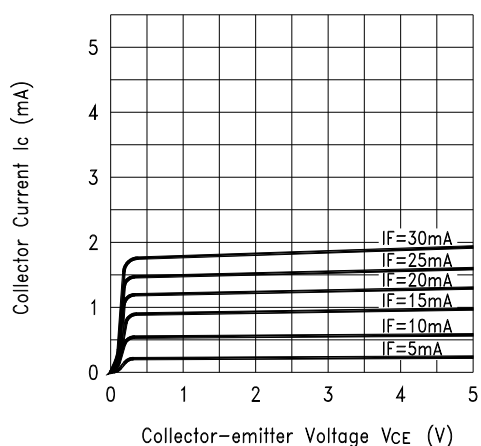



Fig.4 Collector Current vs. Ambient Temperature

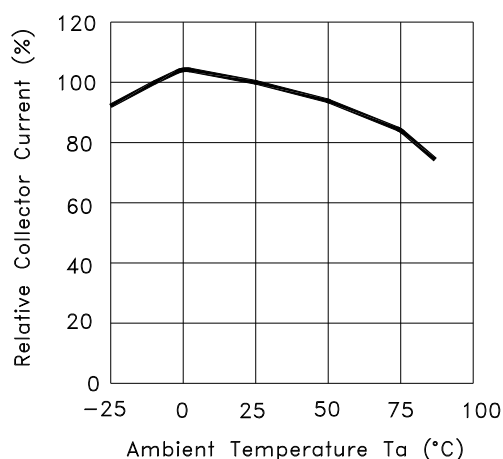

## Tilt Sensor Switch

Item No.	SRBS330310	Description	Photoelectric	Version	14
Page	7 of 9		Publish Date	May. 31, 2018	

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

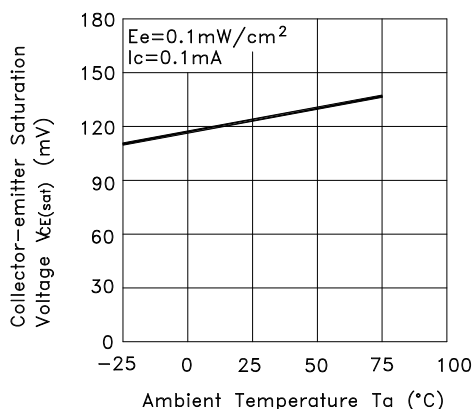

### ● RELIABLE TEST ITEMS

Reliable Test for RBS330310

	Test Item	Contents
1	Operating Temperature	$-25^{\circ}C \sim 85^{\circ}C$
2	Storage Temperature	$-40^{\circ}C \sim 85^{\circ}C$
3	Humidity	$40^{\circ}C / 95 \%RH$
4	Mechanical Life	2Hz, horizontal 1,000,000 times
5	Electrical Life	$I_F = 20 \text{ mA}$ , $V_{CE} = 5 \text{ V}$ TIME: 30,000 hrs



## Tilt Sensor Switch

Item No.	SRBS330310	Description	Photoelectric	Version	14
Page	8 of 9		Publish Date	May. 31, 2018	

### ● SOLDERING CONDITION


Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

Condition Suitable Production Process	Soldering Temperature	Soldering Time	Wattage of Manual Soldering	Type
Wave Soldering	260±5°C	< 5 seconds max.	-	DIP
Manual Soldering	300±5°C	< 3 seconds max.	30W or Temperature- controlled manual soldering	DIP

### ● PACKAGE

	Part Number	Package	Quantity	Total	Dimension
1.	SRBS330310	IC tube	48 pcs	48 pcs	525L*10W*17.5H
		Inner box	72 tubes	3,456 pcs	539L*130W*130H
		Carton	4 boxes	13,824 pcs	551L*285W*288H

※ Package shown as below for reference.

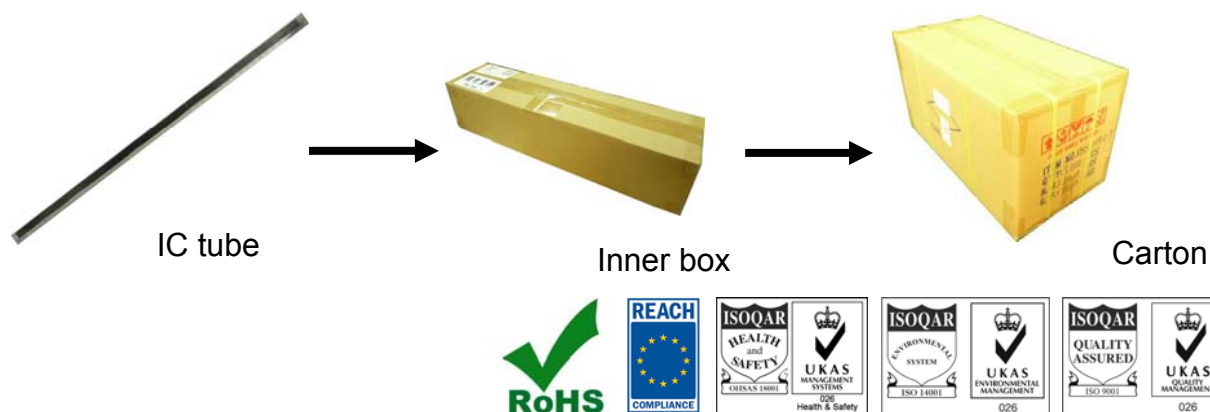

## Tilt Sensor Switch

Item No.	SRBS330310	Description	Photoelectric	Version	14
Page	9 of 9		Publish Date	May. 31, 2018	

### ● NOTES

1. Suggestion for usage: For vibration usage or application, we suggest to add hysteresis for IC.
2. For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.

### ● PRECAUTIONS FOR USE

1. If the products is intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. Do not try to clean the switch with a solvent or similar substance after the soldering process.
3. Use water-soluble flux may damage the switch.
4. Please follow the soldering instruction accordingly, otherwise might lead to defective.
5. Do not use switch in the environment of high humidity, because such an environment may cause the leakage current between the terminals.
6. Please do not exceed the rated load as there will be a risk of disabling the product function.
7. In the circuit, switch should not be near or directly connected with the magnetic component solder joints (for example: relays, transformers, etc.).
8. To prevent damaging IR and PT, please make electrostatic protective treatment, for example: wearing a conductive wrist strap or antistatic gloves during production process, and grounding machinery etc.

