
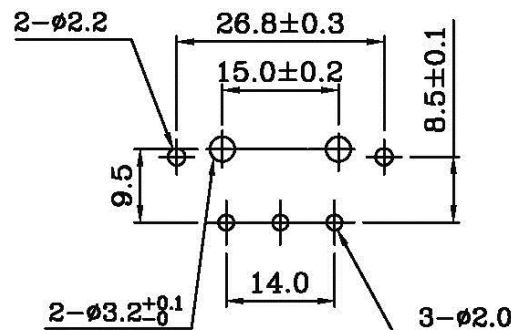
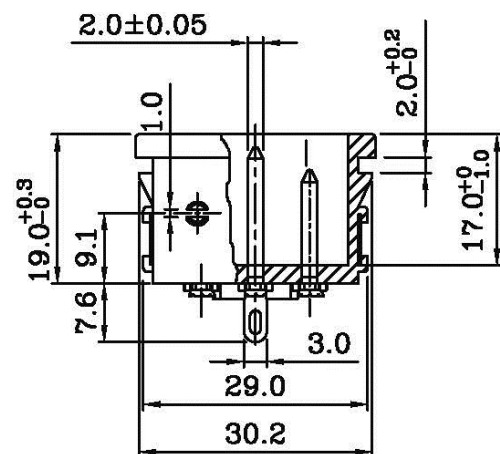
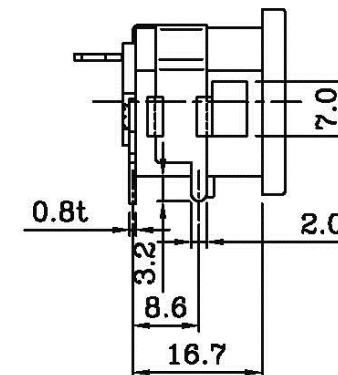
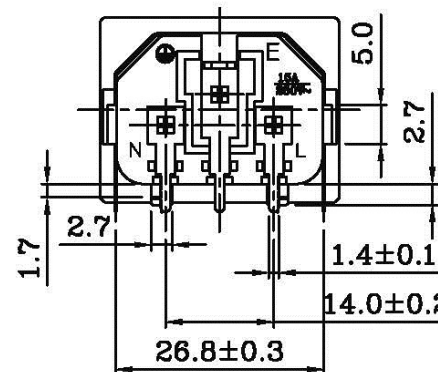
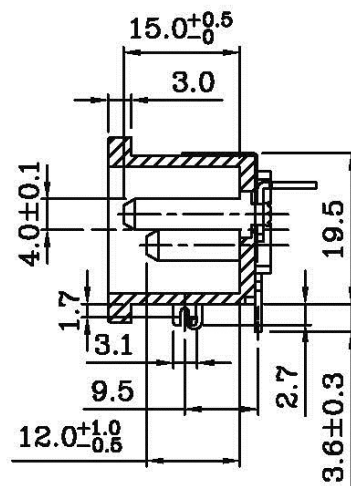


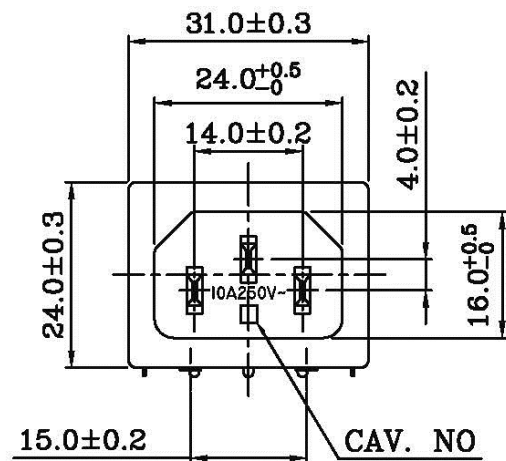

PCB LAYOUT

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Filled Thermoplastic . UL 94V~0

Rating:AC 15A 250V	
Mark	Safety Regulation
cFUs	cULus
Rating:AC 10A 250V	
Mark	Safety Regulation
△	VDE
CCC	CCC
10	ENEC


IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 台北縣中和市中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http://www.sweeta.com.tw E-mail: sweeta.tw@msa.hinet.net



DRAWN BY

李
2010.10.18
小英

UNIT

mm

UNIT Q'TY

1

SCALE

1:1

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO

10101807Q

DESCRIPTION

PRODUCT NO.

SWR-301SN-B216

INTERIM NO.

NEW NO.

REV

B