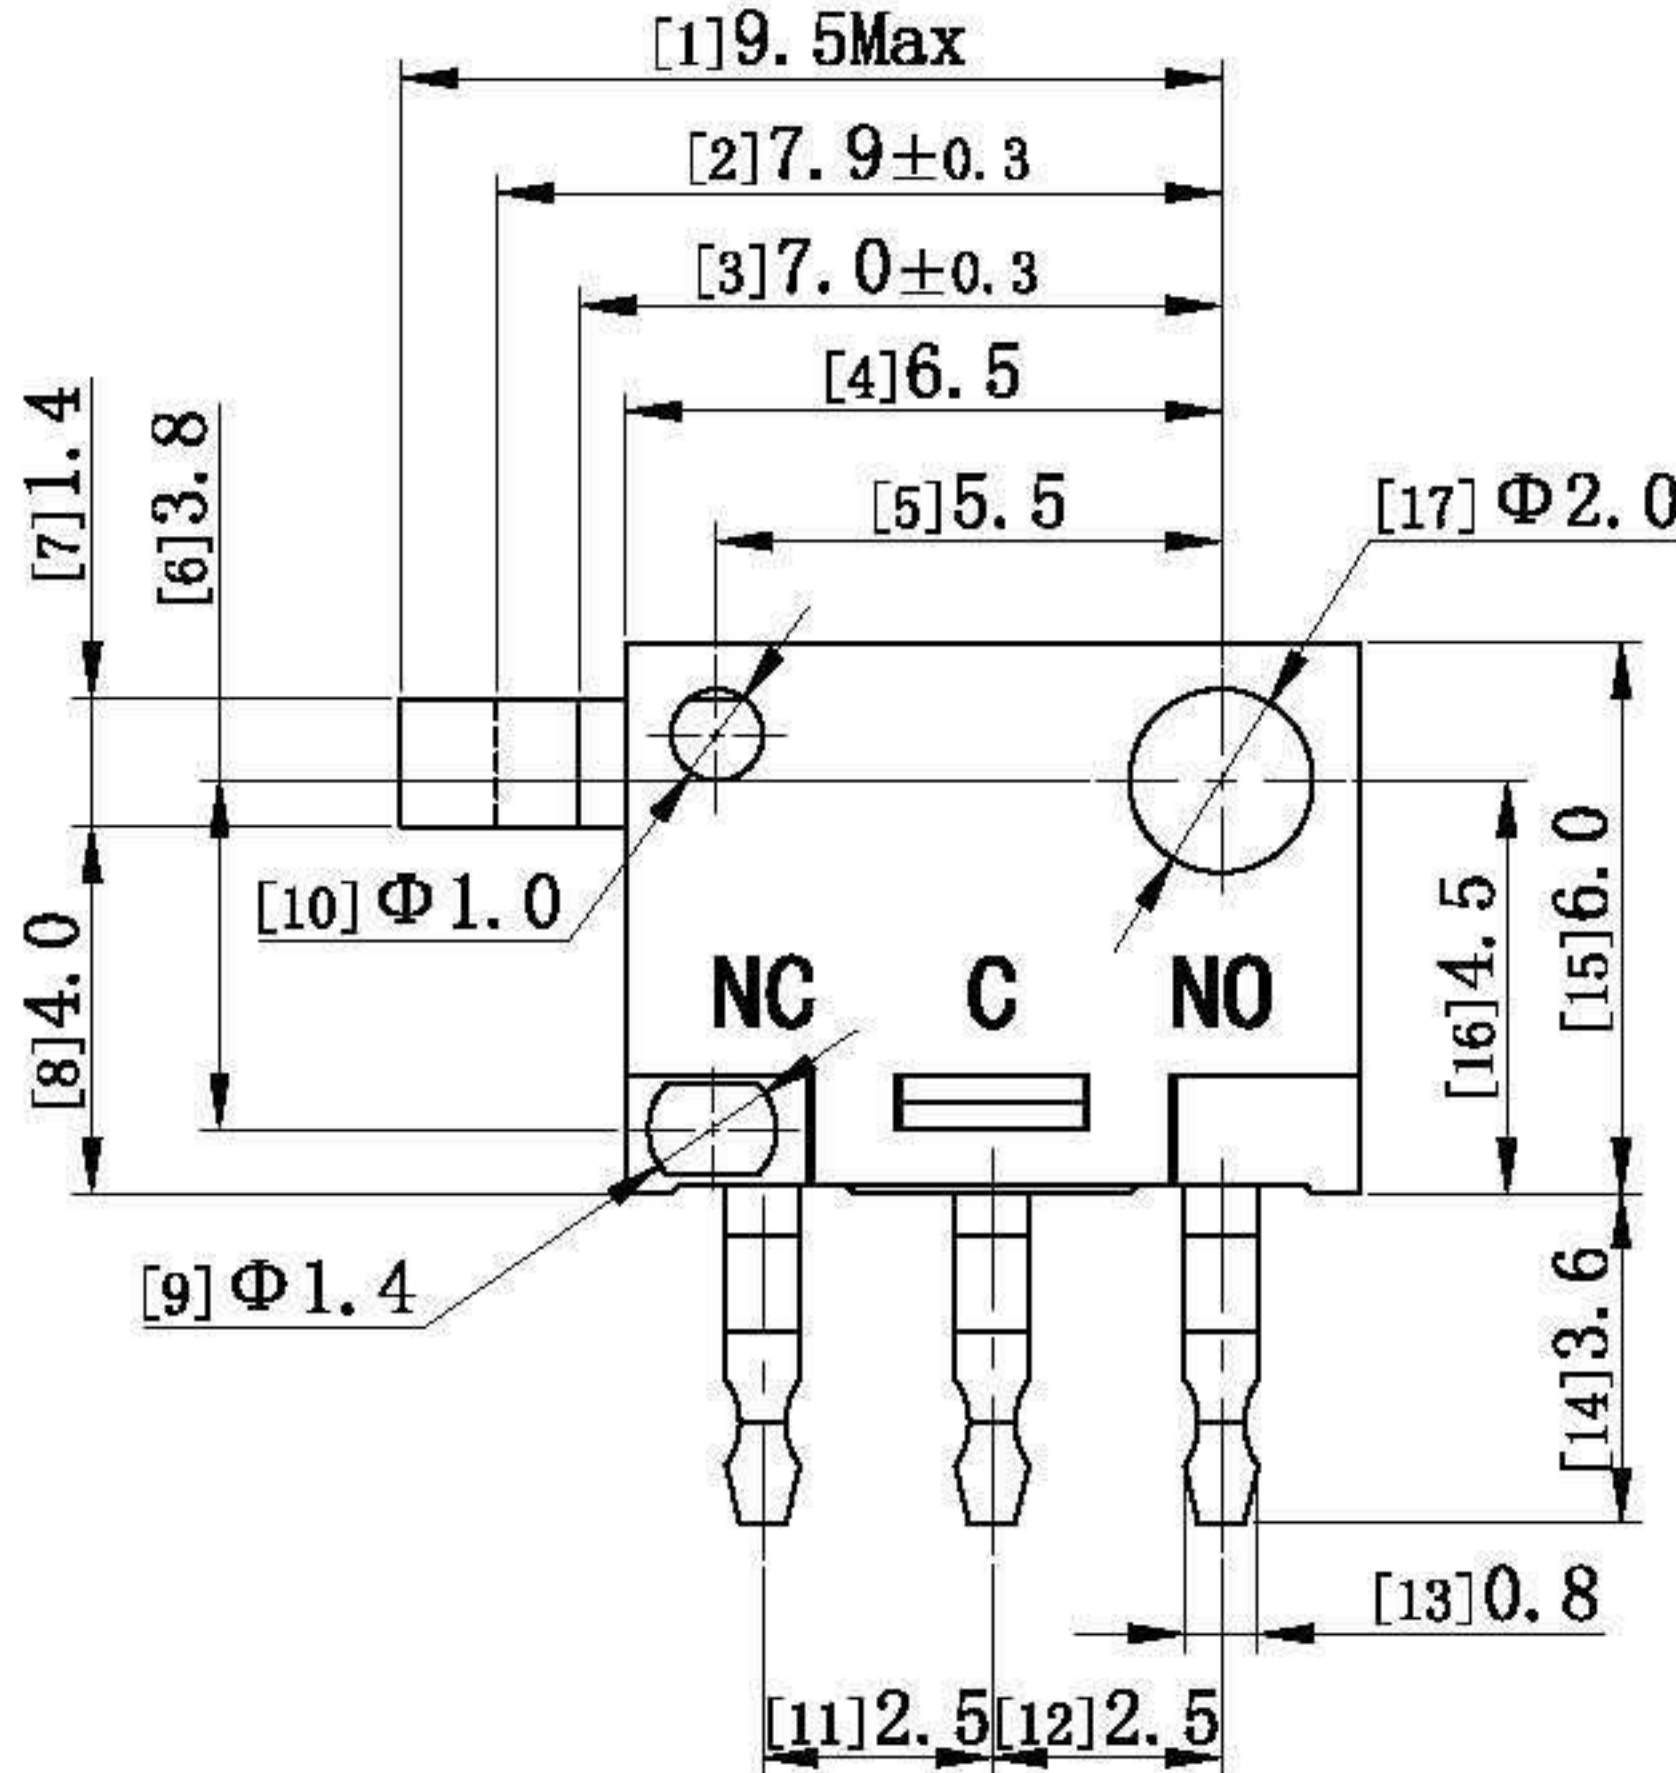
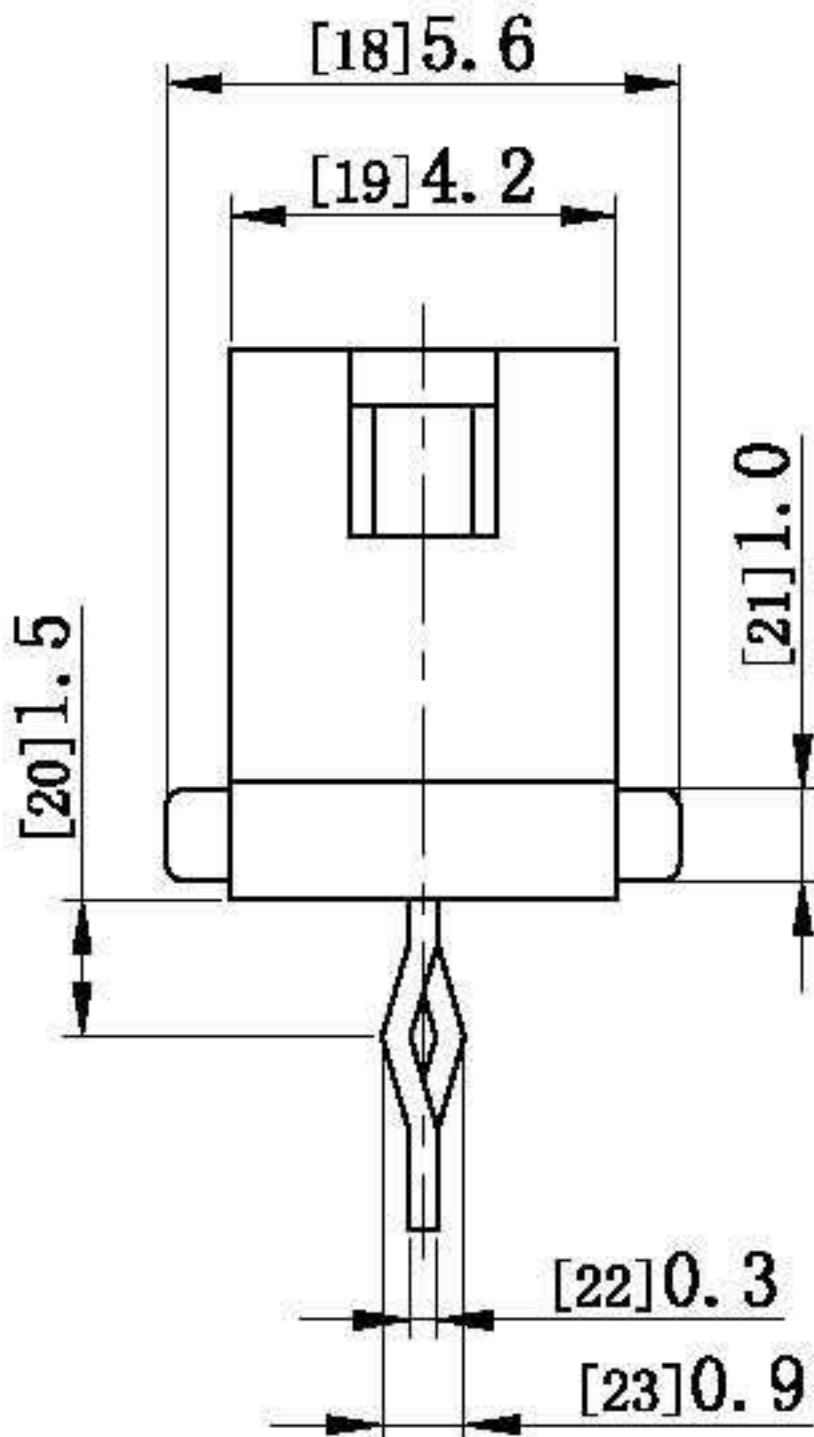
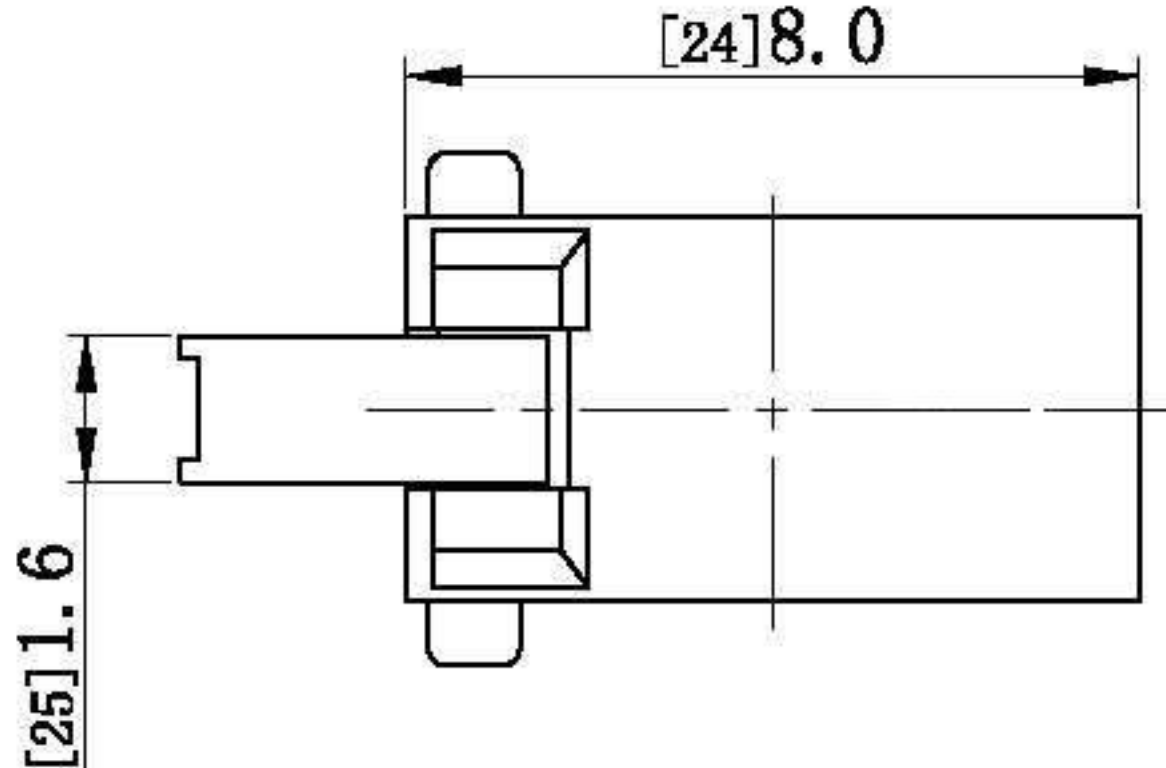



SWEETA PRODUCTS CORPORATION																									
类 型		掷键开关		品 名																					
				SPS023-01P-50																					
1. 功能规格																									
1.1额定电压		30VDC		1.6自由位置 (FP)																					
1.2额定电流		0.1 A		1.7动作位置 (OP1)																					
1.3接触电阻 (CR)		≤100mΩ (初始值)		1.8动作位置 (OP2)																					
1.4操作力 (OF)		50±20gf		1.9动作极限位置 (TTP)																					
1.5回弹力 (RF)				1.10灵敏度 (BT)																					
2. 可靠度参数																									
2.1机械寿命		50,000 cycles		2.5耐焊接热																					
2.2电气寿命		10,000 cycles		2.6操作温度																					
2.3绝缘电阻 (IR)		≥100MΩ DC250V (初始值)		2.7储存湿度																					
2.4耐压强度 (WV)		AC250V 1 minute (初始值)		2.8																					
3. 尺寸规格图																									
   Switching Timing Non-shorting Model <table><tr><td></td><td>FP</td><td>OP1</td><td>OP2</td><td>TTP</td></tr><tr><td>(2) NC</td><td></td><td></td><td></td><td></td></tr><tr><td>(1) C</td><td></td><td></td><td></td><td></td></tr><tr><td>(3) NO</td><td></td><td></td><td></td><td></td></tr></table>							FP	OP1	OP2	TTP	(2) NC					(1) C					(3) NO				
	FP	OP1	OP2	TTP																					
(2) NC																									
(1) C																									
(3) NO																									
版 本		修订内容			日期																				
文件编号		第A版 第0次修订			一般公差																				
文件名称		成品规格书			单 位																				
拟制		审核			批准																				
					生效日期																				

喜威達企業股份有限公司

SWEETA PRODUCTS CORPORATION

SERIES 系列		DETECTION SWITCHES(SPS023)		Issuance date 日期:	
Document No.文件名称		Edition 版本		C	Page 页码
第 1 页 共 3 页					
NO.	Part Name 品名	Q'TY 数量	Generic Class 材质		(Mark) 备注
1	Case 上 盖	1	PA66		
2	Stem 型 物	1	PA66		
3	Clip 夹 子	1	C5210		
4	Base 底 座	1	PA66		
5	Terminal 端 子	1	C2680		
6	Spring 弹 簧	1	SUS304		

Structure chart:
结构示意图:

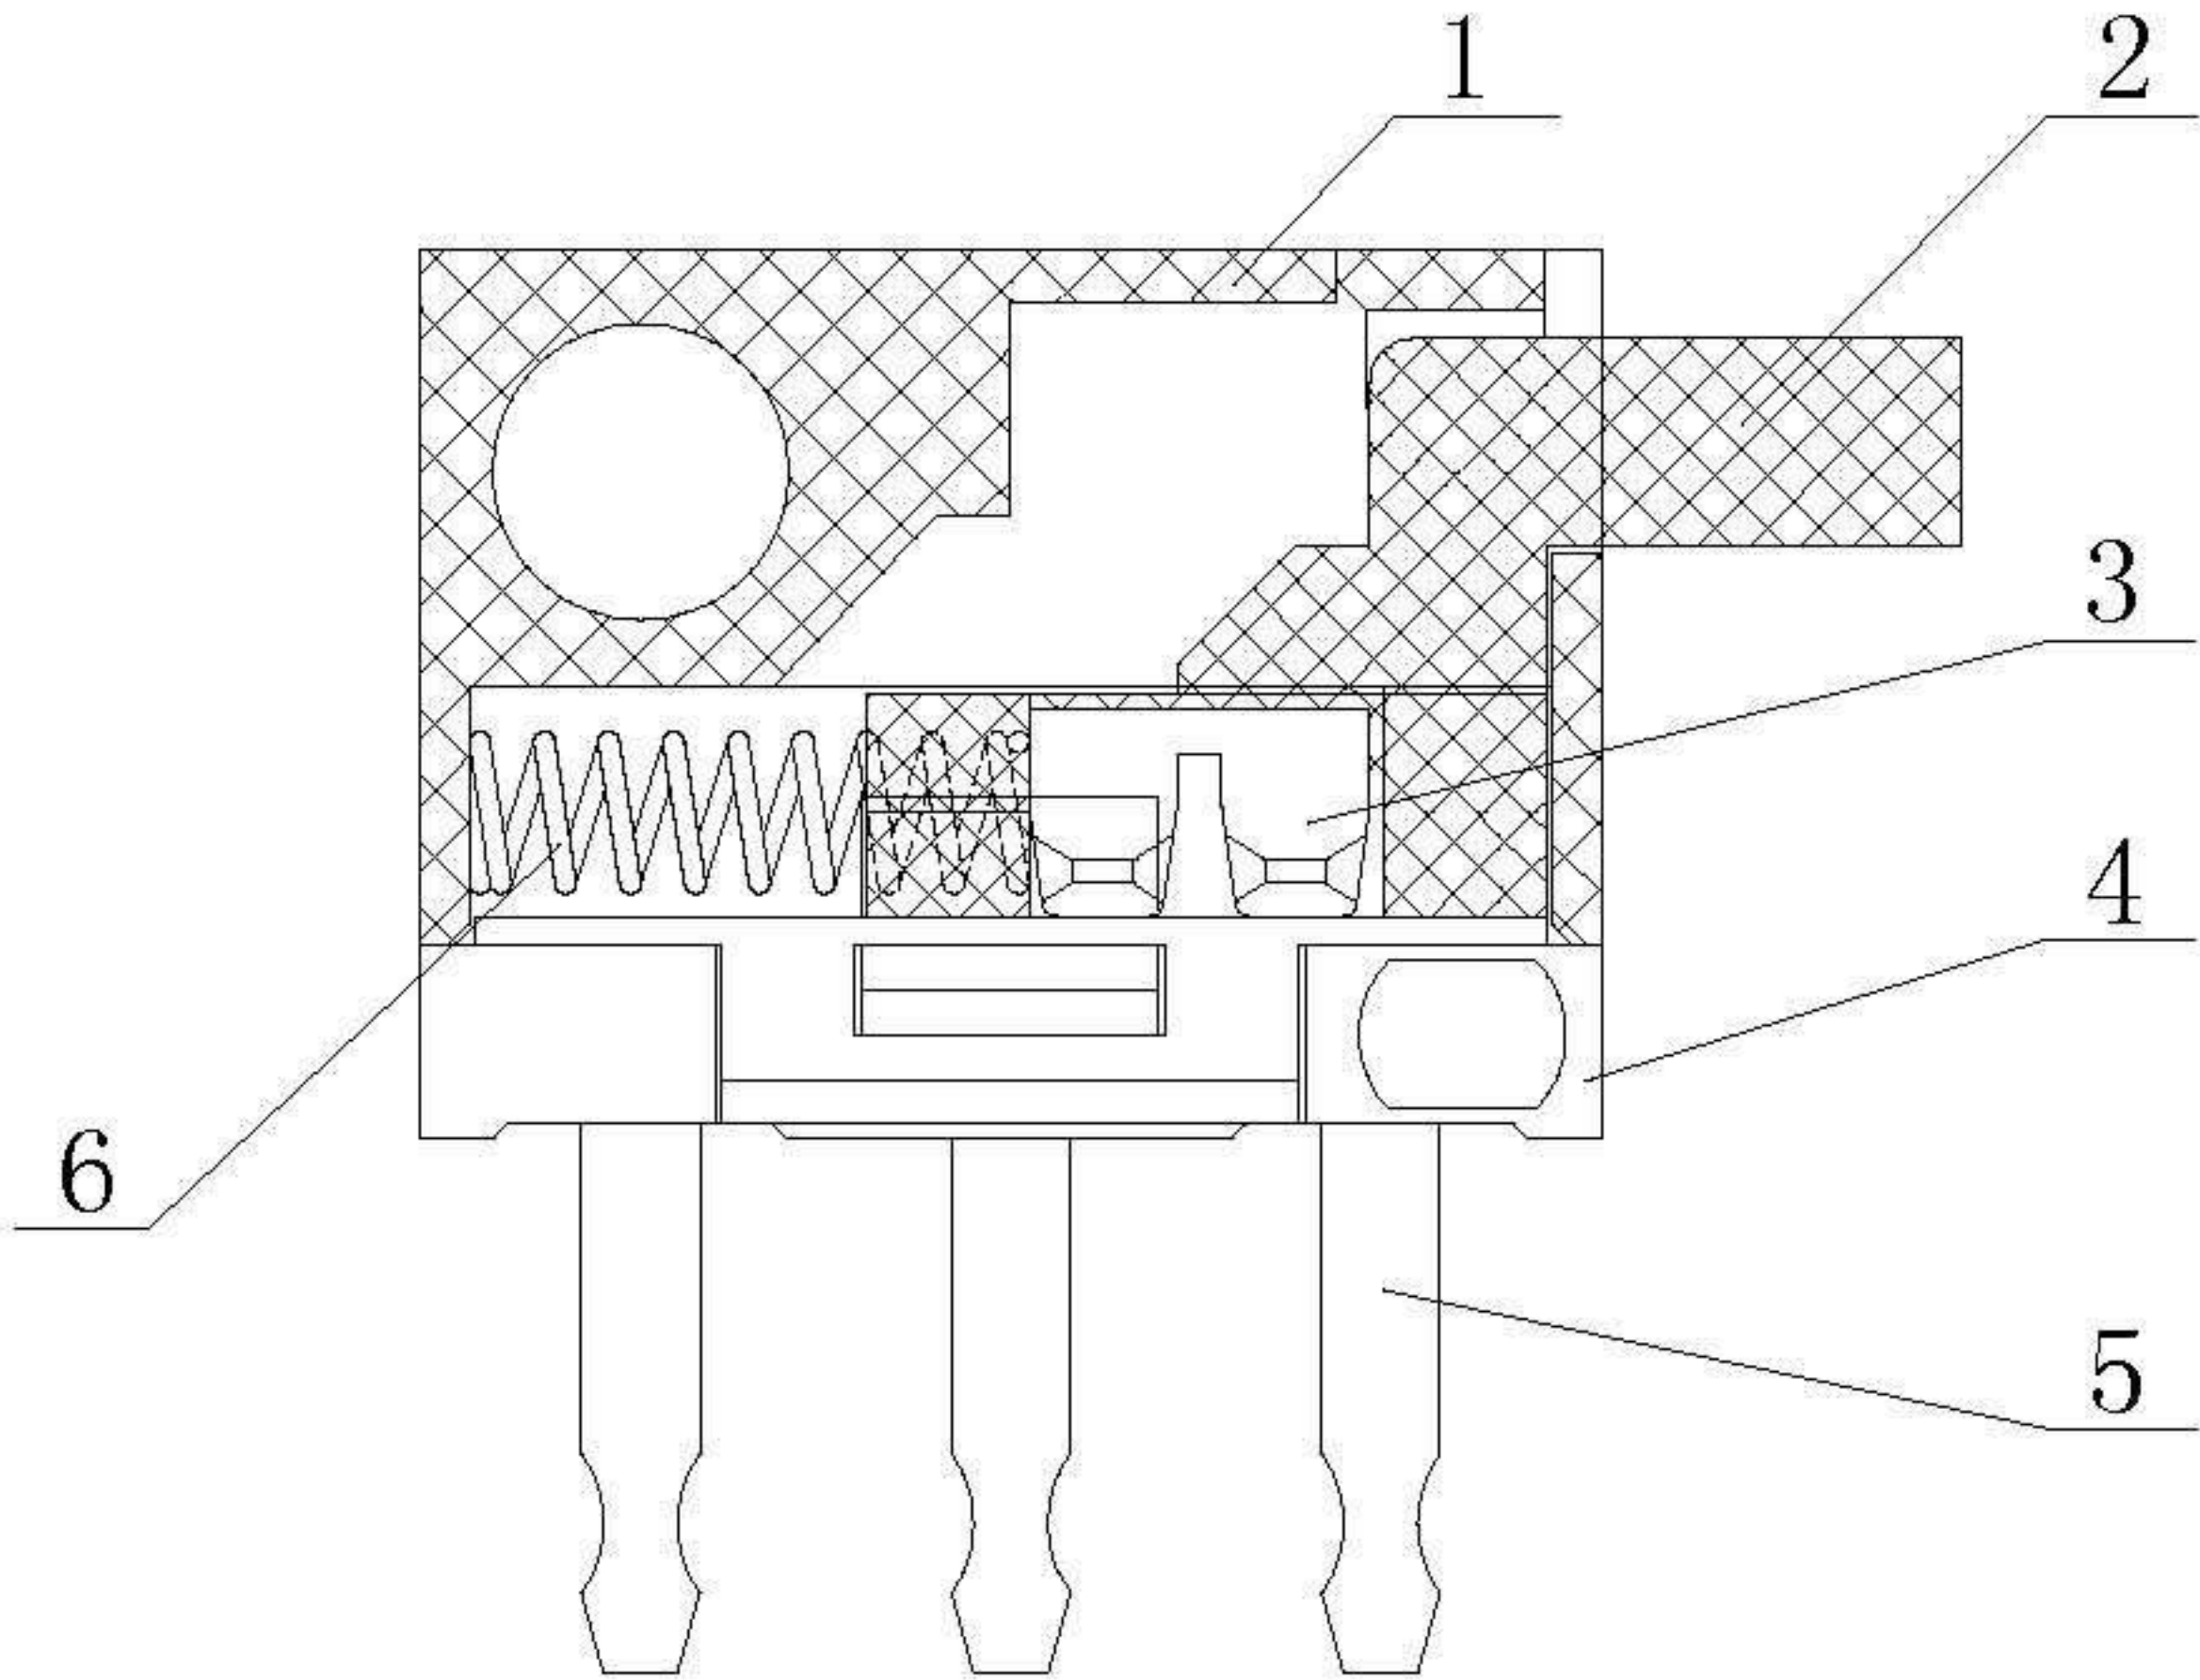

喜威達企業股份有限公司

SWEETA PRODUCTS CORPORATION

SERIES 系列		DETECTION SWITCHES(SPS023)		Issuance date 日期:			
Document No.文件名称				Edition 版本	C	Page 页码	第 2 页 共 3 页
1、General(一般特性)：							
1.1 Switch rating:		DC 30, 0.1A		(规格: DC 30, 0.1A)			
1.2Operating temperature range		-10℃~70℃		(操作温度范围: -10℃~70℃)			
1.3 Preservative temperature range		-10℃~80℃		(储存温度: -10℃~80℃)			
1.4 Storage humidity range		<85%RH		(储存湿度: <85%RH)			
2.Performance 功能参数							
2.1 Electrical characteristics(电气特性)							
Items 项目		Test conditions 测试条件				Criteria 标准	
2.1.1	Contact resistance 接触电阻	Applying a static load twice the operating force to the stem, measurements shall be made between the terminals. Measurement shall be made with a contact resistance meter for 2m Ω precision under the condition which a voltage of DC 5V and a current of 0.1A shall be applied between the terminals. 在按钮上施加两倍操作力的静负荷值，采用精度为 2m Ω 高稳定度线性毫欧表，在 DC 5V 0.1A 的条件下测量端子两端的接触电阻。				Refer to individual product drawing. 参考规格图纸	
2.1.2	Insulation resistance 绝缘电阻	Spec. voltage (Refer to the 2.3 item of spec. drawing) is applied between each pair of terminals and between the terminal and the metal frame for one minute. Measurement shall be made with a test instrument of insulation resistance under the condition Spec. voltage is applied between the terminals . 采用绝缘电阻器仪分别在相互绝缘的所有端子之间各接线端子与外露的非金属零件之间加载规格电压（参见规格图纸 2.3 项）持续 1 分钟测试绝缘电阻值。				Refer to individual product drawing. 参考规格图纸	
2.1.3	Dielectric withstand in voltage 耐压强度	Spec. voltage (Refer to the 2.4 item of spec. drawing)shall be applied across terminals and frame for one minute. 在端子两端之间加载规格电压（参见规格图纸 2.4 项），持续时间为 1 分钟。				There shall be no breakdown 无电击穿等异常.	
3.Mechanical characteristics 机械特性							
3.1	Operation force 操作力	Placing the switch such that the direction of switch operation is vertical, and then gradually increasing the load applied to the stem, the maximum load for the stem to come to operating position shall be measured. 置开关垂直状态，渐增力度使型物至动作位置为最大值之力度.				Refer to individual product drawing. 参考规格图纸	

喜威達企業股份有限公司

SWEETA PRODUCTS CORPORATION

SERIES 系列		DETECTION SWITCHES(SPS023)		Issuance date 日期:	
Document No.文件名称				Edition 版本	C
Page 页码		第 3 页 共 3 页			
Items 项目		Test conditions 测试条件			Criteria 标准
3.2	Terminal strength 端子强度	A static load of 500gf Max shall be applied to the tip of the terminal for 30 sec. in any direction. 在任意一个方向的先端加上 500gf Max 力度测试, 时间为 30 秒。			Electrical characteristics shall be satisfied without damage or excessive looseness of terminals. 在端子中没有裂开, 松动等异常, 满足于机械, 电器性能。
4. soldering characteristics 焊接性能					
4.1	Hand soldering 手工焊	Use a soldering iron of 30 watts, controlled at 380℃ approximately 3 seconds 1time while applying solder. 焊接时需 在 30 瓦烙铁, 控制于 380℃, 大约 3 秒钟 1 次条件下进行。			A new uniform coating of solder shall cover a minimum of 90% of the surface being immersed. There shall be no defects in appearance or in the mechanical functions. 覆锡性能达到浸入表面的 90%以上 没有出现任何外观和机械功能上的损伤。
5. Durability characteristic:耐久性能					
5.1	Mechanical life 机械寿命	(1) Without loading 无负载 (2) Operating speed : 200 cycles/minute 操作频率: 200 次/分钟 (3) Push force : maximum value of operating force twice 推动力: 操作力的最大规格值的两倍 (4) Life: 50,000 cycles 寿命: 50,000 次			After test: (1)Contact resistance: 1 ohm Max. (2)Insulation resistance: 10M ohm Min. (3)Bounce: 5m sec. Max. (4)Withstand voltage: AC250V, 1 minute (5)Operating force: 30% of initial value (6) There shall be no defects in appearance or in the mechanical functions. 试验后: (1)接触电阻:1 欧姆以下 (2)绝缘电阻:10 兆欧姆以上 (3)灵敏度: 5 毫秒以下 (4)耐压强度: AC250V 1 分钟 (5)操作力度:测试初始值的 30%以内 (6)没有出现任何外观和机械功能上的损伤。
	Electrical life 电气寿命	(1) which the load of 0.1A, DC30V 负载为 0.1A, DC30V (2) Operating speed : 30 cycles/minute 操作频率: 30 次/分钟 (3) Push force : maximum value of operating force twice 推动力: 操作力的最大规格值的两倍 (4) Life: 10,000 cycles 寿命: 10,000 次			
6. Quality records of delivered goods 出货证明记录					
6.1 Package boxes or package bags should be attached labels or identifiers of Model No., Quantity and Quality Pursuing No. 成品包装箱或包装袋上应附有产品型号、数量及质量追踪号的标签或标识。					
6.2 There shall be quality records of inspection and test in package boxed. 出货产品包装批、出货批应附有产品检验、试验之质量证明记录。					