

SCHMATIC

SKS9BXXX0R-A

SIZE TYPE	
ITEM NO	DESCRIPTION
9	19 x19 (mm)

CAP TYPE	
ITEM NO	DESCRIPTION
B	ACTUATOR

CAP COLOR	
ITEM NO	DESCRIPTION
1	White
3	Red
5	Yellow
6	Green
7	Blue

LED BRIGHTNESS	
NONE	NORMAL BRIGHTNESS
A	SUPER BRIGHTNESS

1st Set LED COLOR			
ITEM NO	EMISSION COLOR	Dominant Wavelength	Test Condition
1	White	$\lambda_d=0.27\sim0.31$ μm	IF = 5mA
3	Red	$\lambda_d=638\sim648$ nm	IF = 20mA
5	Yellow	$\lambda_d=582\sim592$ nm	IF = 20mA
6	Green	$\lambda_d=520$ nm	IF = 20mA
7	Blue	$\lambda_d=465\sim470$ nm	IF = 20mA

LED QTY	
ITEM NO	DESCRIPTION
0	NO LED
1	ONE LED
2	TWO LEDs

SPECIFICATIONS

RATING:100mA max, 42 VAC/DC

MECHANICAL LIFE: 1,000,000 cycles

CONTACT RESISTANCE: 100 m Ω max.(initial)

INSULATION RESISTANCE: 1000 M Ω min.

DIELECTRIC STRENGTH: 1,000VAC

MATERIALS

SWITCH HOUSING: PBT

TRANSPARENT: ABS


CONTACT: Stainless, Au plated

TERMINALS: Brass, Au plated

TERMINAL SEAL: Epoxy

RoHS: 2002/95/EC

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

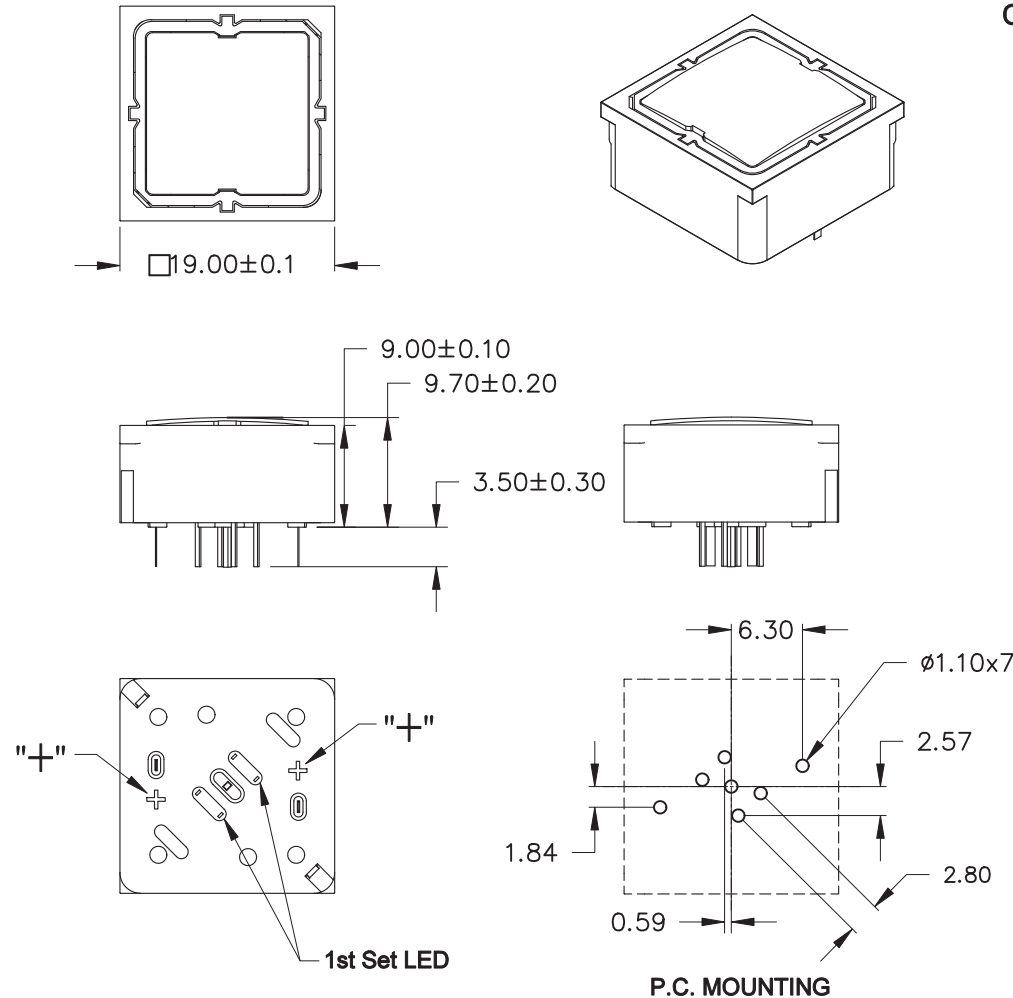

SCALE (比例): 1:1

TOLERANCE (公差):
0.00 mm $\pm$ 0.25mm
0.0 mm $\pm$ 0.40mm
ANGULAR: $\pm$ 5°
FILE NAME: KS0017

TITLE
圖名

Short-travel keyswitches

SIZE
圖紙

A4

DWG NO.
圖號

SKS9B3260R-A

UNIT
單位

mm
Inch

REV.
版本

A

DATE
日期

JUL - 06 - 2011

SHEET
張數

1 of 1

CHECKED BY
審核

RICHARD

DRAWN BY
製圖

IRENE