
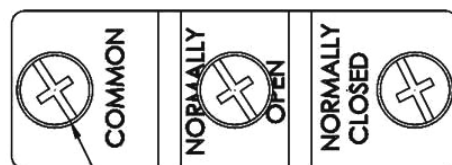


CHARACTERISTICS		Rating	15A 125VAC or 250VAC
		Terminal	SCREW
Contact resistance	15mΩ max. (initial)	Item No.	Z15G1701
Insulation resistance	100MΩ min. (at 500 VDC)	OF max.	70g
Dielectric strength	1,000 VAC,50/60Hz for 1 minute between	RF min.	14g
		PT max.	10mm
		OT min.	5.6mm
Mechanically service life	1,000,000 operations min.	MD max.	1.27mm
Electrically service life	100,000 operations min.	FP max.	28.2mm
		OP	19±0.8mm

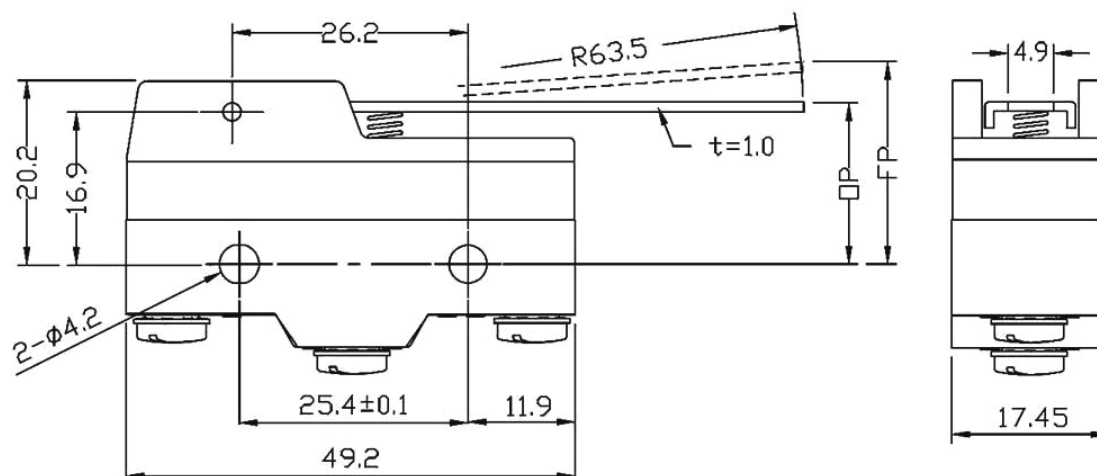

3-M4X5.0
Terminal Screw
with toothed lock washer

0.000*±0.25*	0.000±0.005	DRAWN	ARTHUR	DATE	2003/03/18
0.00*±0.5*	0.00±0.10	CHECKED		DATE	
0.0*±1*	0.0±0.20	APPROVER		DATE	
0*±2*	0±0.50	SCALE	2.5 : 1		
ANGULAR	LINEAR				
TOLERANCE					

B		I. the screw change from cup washer to toothed lock washer	ARTHUR		2003/03/18
A		FIRST ISSUE	H.J.L		2000.04.29
ISS	NOTE	DESCRIPTION	GRID	DRW	APP
喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION					
TITLE: SZ15G1701 CHARACTERISTICS					
FINISH					
MATERIAL:					
DWG NO.				A3	