


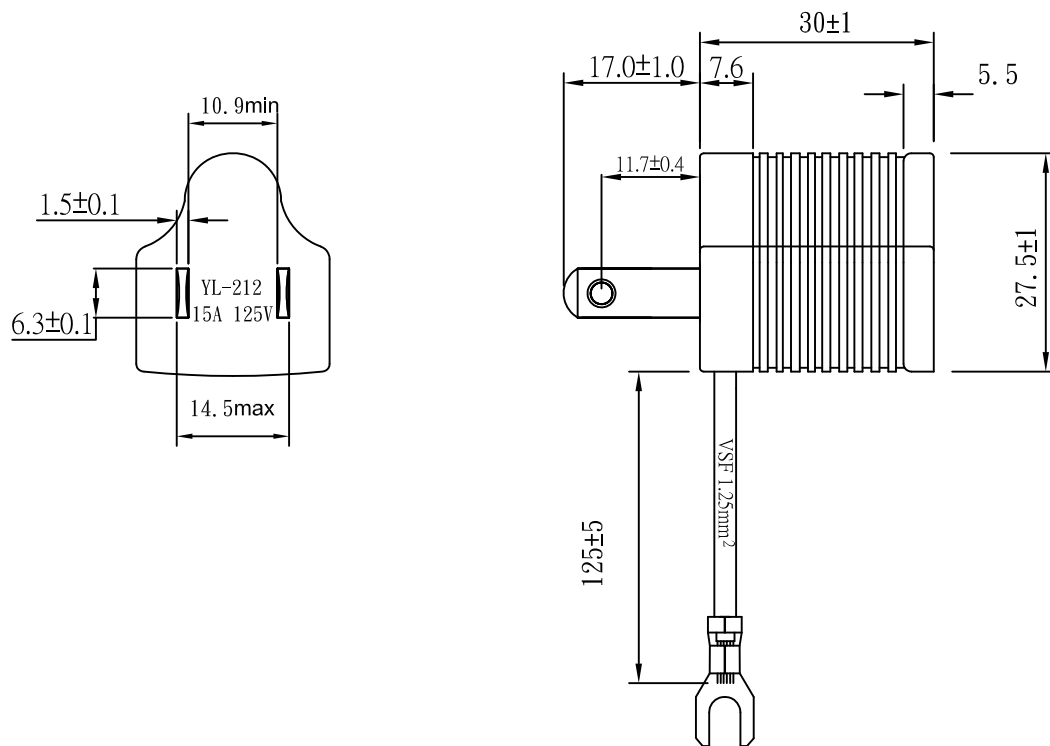

Note:

1.Rating:15A 125V

2.Insulation Resistance:100MΩ

3.Dielectric Voltage:2000V/sec

注:所有轉接頭顏色依訂單要求,此圖面不SHOW顏色

- 線材 VSF GEN/YEL 1.25mm² L=150⁺⁰₋₅ mm
- 端子98575 D型銅管 1PC
- YL-212非极性兩PIN內模(改模后) 白色 1PC
- 小夾鏈帶:110X85X0.04mm 1PC
(W=110 L=85)需有黑色環保標志
- 96552BS-2 Y型端子
- 插頭端子:M97639BL-1 YL-212銅片 2PCS
- 膠料: 黑色

一般寸法公差:
>0±0.30
>1.0±0.50
>10.0±1.0
>20.0±2.0
Angle:±1°

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

Approver:

Checker:


Drawer: Adam

08/10/2017

Title PLug Adaptor

Dwg No. SW/YL-212

File No.



Scale: 2 : 1

Size: A 4

Rev : 0-1

Sheet: 1 / 1

WF00-4C