



Rating	50A 12VDC		
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		
Circuit	2P SPST (ON)-OFF	Thickness:9.0mm max.	Thickness:9.0mm max.

MATERIAL:






Frame: Nylon 66 (94V-2), Black

Cover: ABS (94HB)

Terminals: Copper Alloy

Contacts: Copper Alloy+AgSn02In03

Actuator: PC (94V-2) ,Red

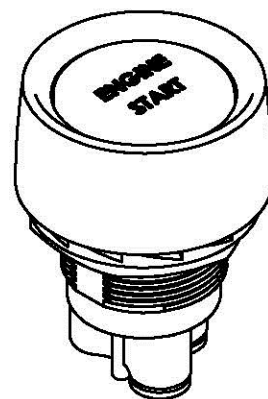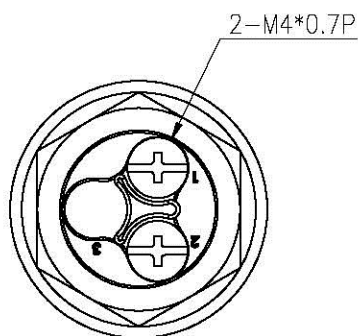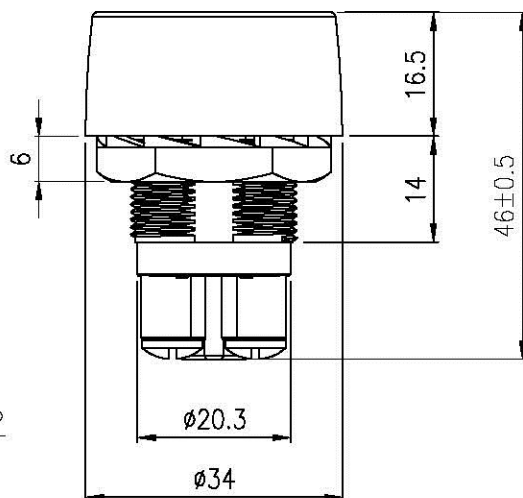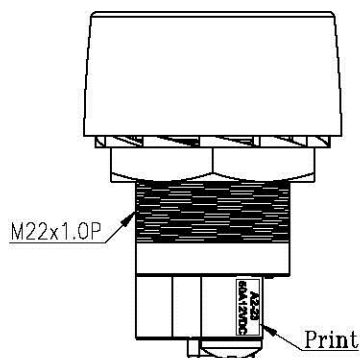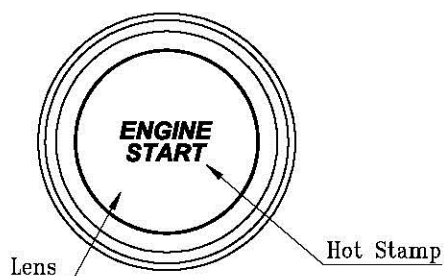

TOLERANCE: $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED.

Date	Name	Description					NO
Drawing	Check	Approval	SCI No.	1110080		Model Name	PUSH SWITCH
C.J.Chan		王 佰 山	Customer No.			Model No.	SPA2-23A-07
8/12/'10		8/12/'10	Unit	mm	SWEETA PRODUCTS CORPORATION		