





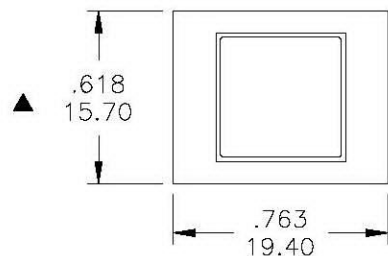


INCREASE TO .620/.625 15.75/15.88
FOR .091/.125 2.31/3.18 THK PANEL

PANEL MOUNTING

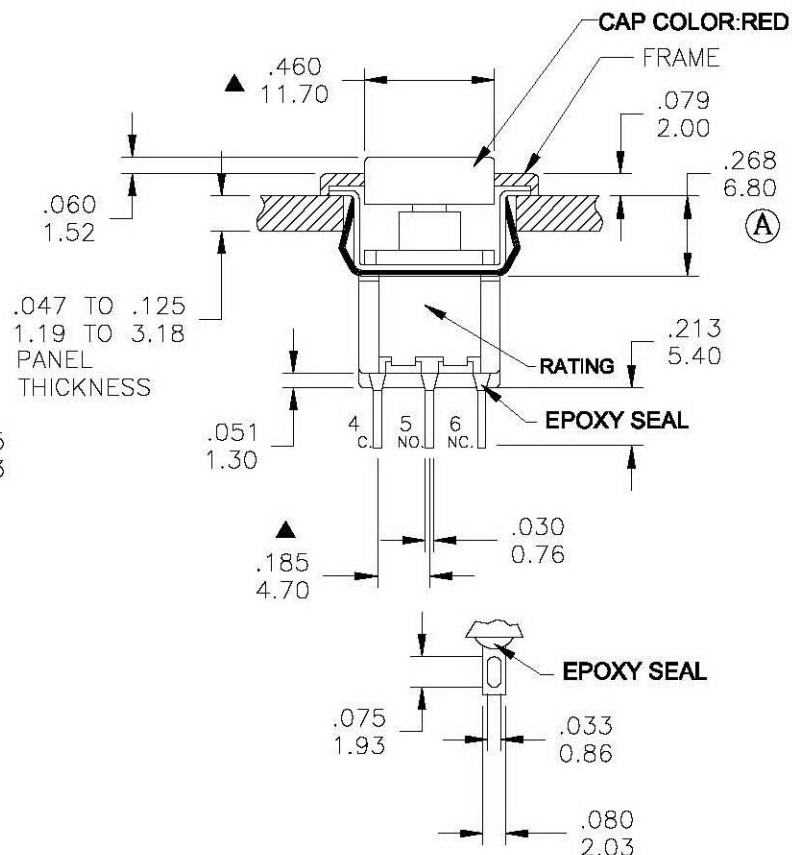

SOLDER LUG

Model No.	POS.1	POS.2
		
A202	ON	MOM
Term. Comm.	1-3,4-6	1-2,4-5
SCHEMATIC		

SWITCH FUNCTION

SPECIFICATIONS

MECHANICAL LIFE: 50,000 make-and-break cycles.
CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30° C to 85° C.

MATERIALS

CASE: Dially phthalate (DAP) (UL94v-0).
PLUNGER: Glass filled Nylon or Glass filled polyester.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
CONTACT: Silver or gold plated.
 RoHS:2002/95/EC

RATING :

R : 0.4 VA max. @20VAC or DC max.
 Q : 1Amp @250VAC
 3Amps @120 VAC or 28 VDC

喜威達企業股份有限公司
 SWEETA PRODUCTS CORPORATION

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2	TITLE 圖 名	Snap-Acting Pushbutton Switches			SIZE 圖紙	A4
1	Ⓐ	7.20(.284)	6.80(.268)	JUN - 27 - 2007	TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : 7MDP0098	DWG NO. 圖 號	A202-A7			UNIT 單位	inch mm
2	Ⓑ		變更版本	JUN - 19 - 2008		REV. 版本	C	DATE 日期	DEC - 14 - 2006	SHEET 張 數	1 of 1
3	Ⓒ					CHECKED BY 審 核	RICHARD		DRAWN BY 製 圖	ODA	
4	Ⓓ										
5	Ⓔ										