

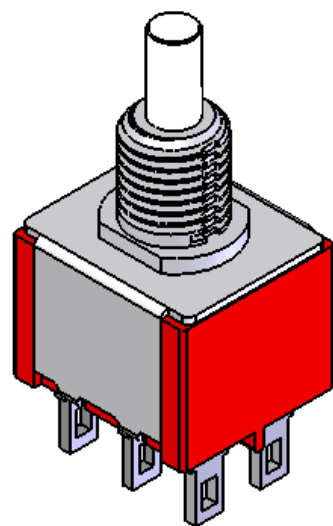


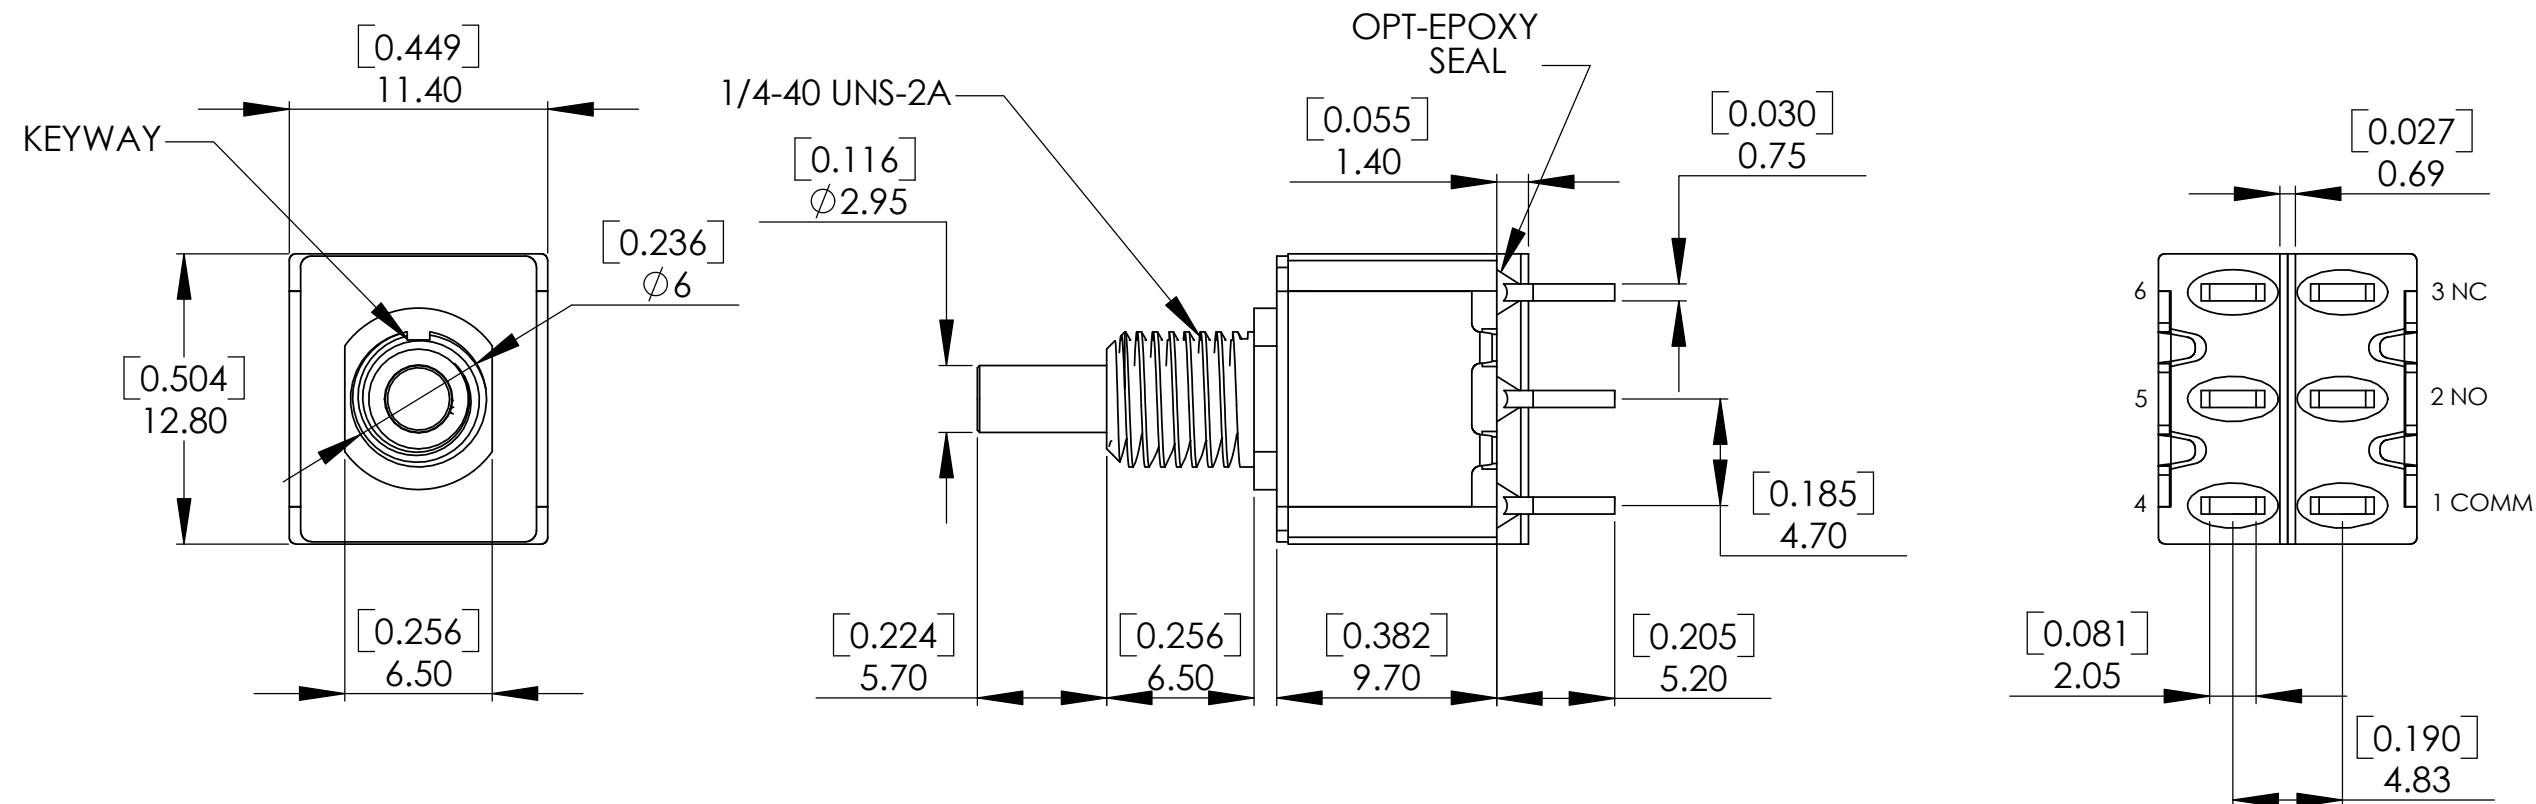

Schematic

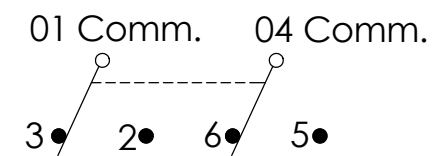

Model No.	TYPE	
A202	ON	MOM
Term Comm.	1-3, 4-6	1-2, 4-5

SPECIFICATIONS:

CONTACT RATING : 3 AMPS @ 120 V AC or 28 VDC.
 1 APMS @250 V AC or 0.4VA AMPS @20 V AC or DC
 ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 10 m Ω max. initial @ 2-4 VDC.
 100 mA, for both coin silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 M Ω min.
 DIELETRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 $^{\circ}$ C to 85 $^{\circ}$ C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 PLUNGER : Polybutylene terephthalate (PBT) (UL 94V-0)
 BUSHING : ZINC ALLOY.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver
 SWITCH SUPPORT : Brass, tin plated.

喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION 23552 台北縣中和市中正路799號1樓 Tel : 02-2226-8001 Fax : 02-2226-8002 http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net				TOLERANCE
				XX. $\pm$ 0.5
				X. $\pm$ 0.2
ITEM NO		DATA		.X $\pm$ 0.2
CHECKED BY		DRAWN BY		.XX $\pm$ 0.2