


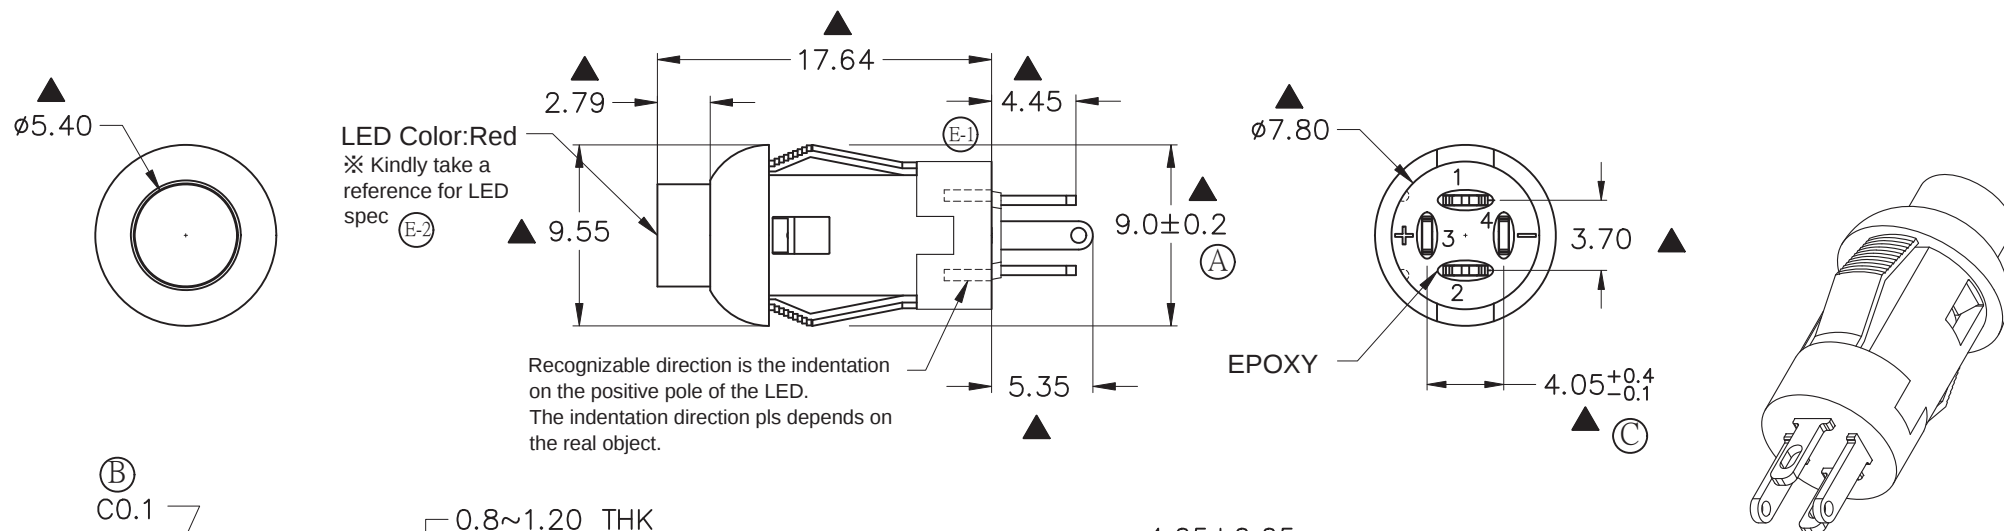

PANEL MOUNTING


Specifications

Pole-position : Momentary Type, SPST with LED
 Contact rating : 30V DC, 0.1A
 Contact resistance : 50 m Ω max. 1.5V DC ; 100mA, by Method of Voltage DROP
 Insulation resistance : 100 M Ω min. 500V DC
 Dielectric strength : 500V AC for 1 Minute
 Operating force 250 $\pm$ 100gf
 Operating life : 50,000 cycles
 Operating temperature range : -40°C ~ 85°C
 Total travel : 1.2 $\pm$ 0.3mm

Materials

Cap : PC
 Case & Housing : Nylon 6/6
 Terminals : Copper alloy with gold plated.

PCB MOUNTING



SWITCH FUNCTION

喜威達企業股份有限公司
 SWEETA PRODUCTS CORPORATION

SCALE (比例) : 3 : 2

TOLERANCE (公差) :
 0.00 mm $\pm$ 0.25mm
 0.0 mm $\pm$ 0.40mm
 ANGULAR : $\pm$ 5°

FILE NAME : PBL0002

TITLE 圖名	Pushbutton Switches			SIZE 圖紙	A4
DWG NO. 圖號	SPBL-03			UNIT 單位	mm
REV. 版本	F	DATE 日期	NOV - 11 - 2010	SHEET 張數	1 of 1
CHECKED BY 審核	RICHARD		DRAWN BY 製圖	IRENE	

版本 : C

表單編號 : QR-0507

符號	原尺寸	修改後尺寸	變更日期
1 (A)	外觀設變9.55→9.0 $\pm$ 0.2, PANEL MOUNTING $\phi 7.90 \rightarrow \phi 8.00$		MAR-25-2011
2 (B)	Panel mounting加C0.1與增加PCB mounting		MAY-18-2011
3 (C)	4.05尺寸加註公差 +0.4/-0.1		AUG-16-2011
4 (D)	增加LED規範		OCT-17-2011
(E-1)	依據ECN GC14040402設變, PBL底座與上蓋組裝改為超音波熔接結構		APR-21-2014
5 (E-2)	LED SPEC改為參閱規格書文字說明		APR-21-2014