




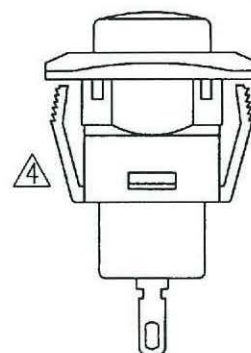
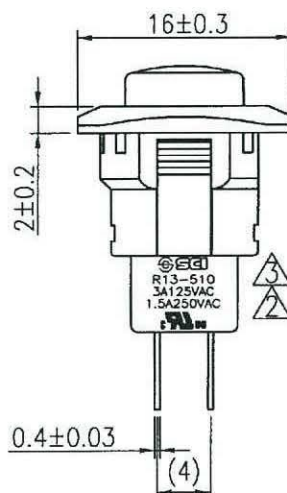
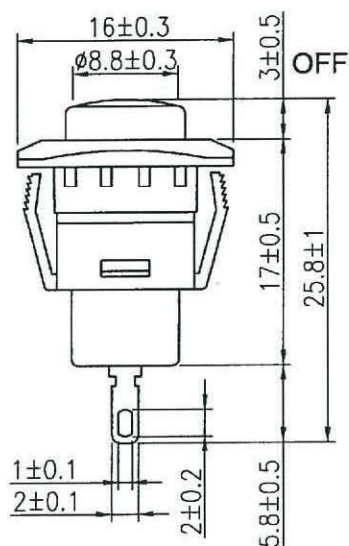


|                       |                                                                                                            |                                                                                     |                                                                                     |
|-----------------------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Rating                | 3A 125V AC, 1.5A 250V AC  | Mounting Hole                                                                       | Circuit Diagram                                                                     |
| Contact Resistance    | 50m ohm Max.                                                                                               |  |  |
| Insulation Resistance | DC 500V 100M ohm Min.                                                                                      |                                                                                     |                                                                                     |
| Dielectric Strength   | AC 1000V 1 minute                                                                                          |                                                                                     |                                                                                     |
| Switch Function       | 2P SPST OFF-(ON)                                                                                           |                                                                                     |                                                                                     |



Material:  
Housing: Black,Nylon#66  
Button: Red,Nylon#66  
Terminals: Silver plated ,Copper alloy



|          |                                                                                     |                                                                                     |              |         |                                                                                       |               |
|----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|---------|---------------------------------------------------------------------------------------|---------------|
| 08/03/13 | 柳新強                                                                                 | 改為卡扣式新結構,更新圖面                                                                       |              |         |  |               |
| 07/30/12 | 柳新強                                                                                 | 增加SCI LOGO                                                                          |              |         |  |               |
| 09/15/06 | 張志豪                                                                                 | UL安規通過3A 125VAC , 1.5A 250VAC追加印刷                                                   |              |         |  |               |
| 08/03/06 | 張志豪                                                                                 | 更新圖面,實物外觀與圖面不符,增加底殼"SCI"標識.                                                         |              |         |  |               |
| Date     | Name                                                                                | Description                                                                         |              |         | NO                                                                                    |               |
| Drawn    | Checked                                                                             | Approved                                                                            | SCI BOM NO.  | 1830201 | Model Name                                                                            | PUSH SWITCH   |
| 柳新強      |  |  | Customer No. |         | Model No.                                                                             | SPR13-510A-05 |
| 08/03/13 | 8/5-13                                                                              | 8/5-13                                                                              | Unit         | mm      | SWEETA PRODUCTS CORPORATION                                                           |               |
|          |                                                                                     |                                                                                     |              |         | Rev.                                                                                  | 4             |