




Rating	10A 125V AC 1/8HP,6A 250V AC 1/3HP 10A 125V AC,6A 250V AC 6A(2) 250V~			
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C			
Switch Function	2P SPST OFF-(ON)	Thickness	X	Y
		0.75~1.25	19.2-0.1	13+0.1
		1.25~2	19.4-0.1	13+0.1
		2~3	19.8-0.1	13+0.1

Material:
 Frame: Black, Nylon#66
 Actuator: Black, Nylon#66

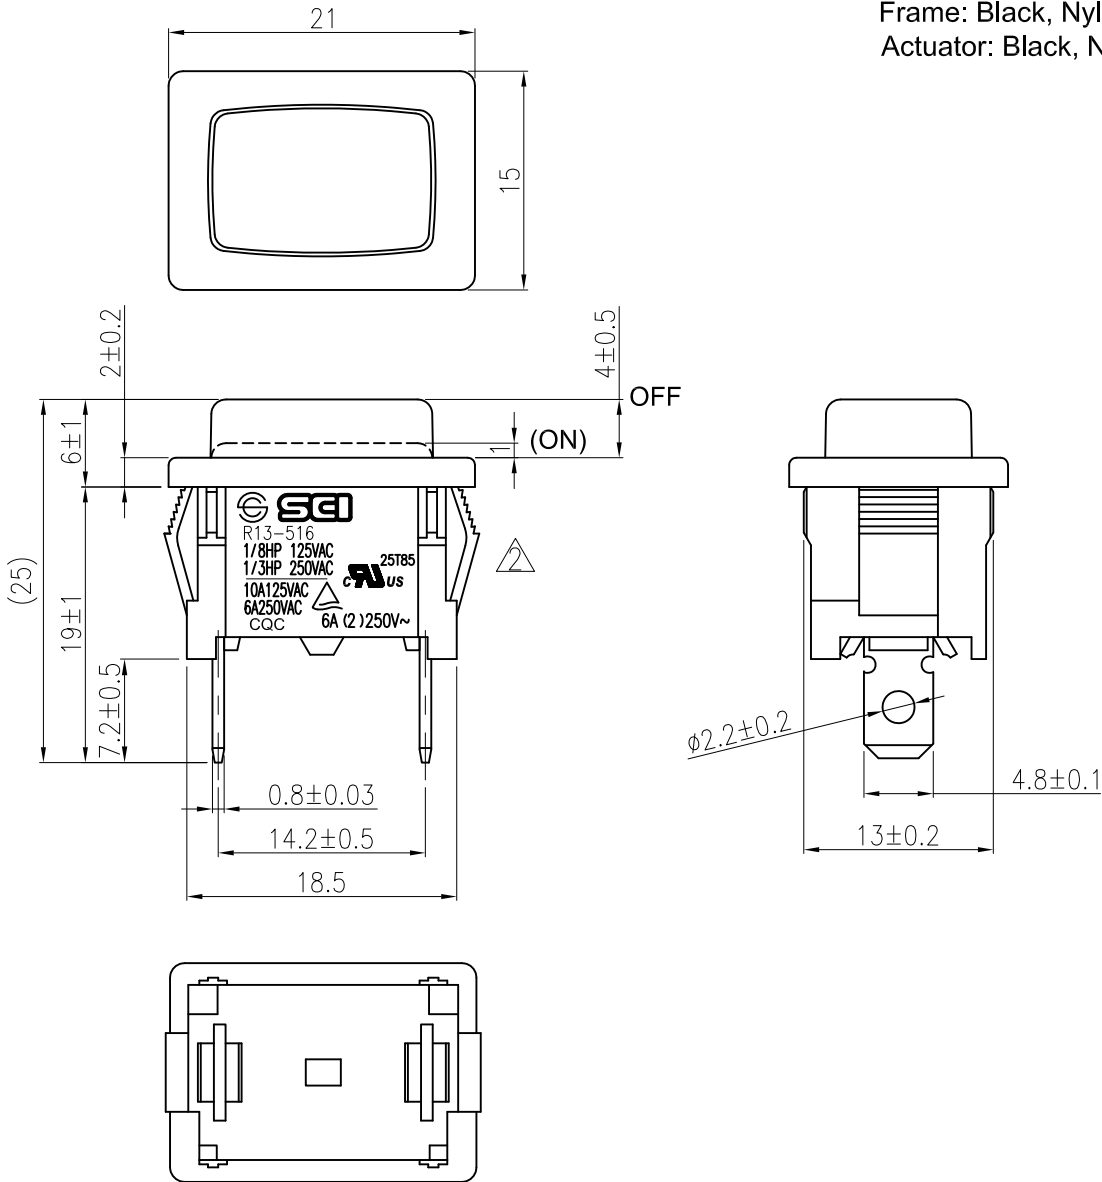

Tolerances Unless Otherwise Specified ±0.3

10/08/'12	柳新強	增加SCI LOGO及CQC刻字					
08/30/'11	雷云飛	Update the drawing layout					
Date	Name	Description					No.
Drawn	Checked	Approved	BOM No.	1830280	Model Name	PUSH SWITCH	
柳新強	徐洲迎	李元生	Customer No.		Model No.	SPR13-516A	Rev.
10/08/'12	10/08/'12	10/08/'12	Unit	mm	SWEETA PRODUCTS CORPORATION		2