



Rating	6A 250V~		Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C			
Switch Function	3P SPST OFF-ON (LED dependent)			
			Thickness:0.7~3.0	PUSH ON: LED "ON" PUSH OFF: LED "OFF"

***MATERIAL:**





Frame: Black, Nylon 66 (94-V2)

Actuator: Black, Nylon 66 (94-V2)

LED: Red

Terminal COM,NO: Silver plated, Brass alloy

Terminal -: Brass alloy

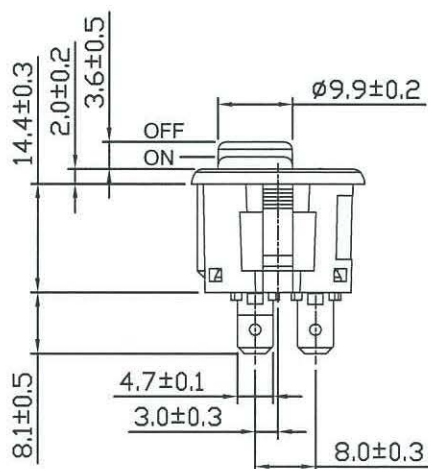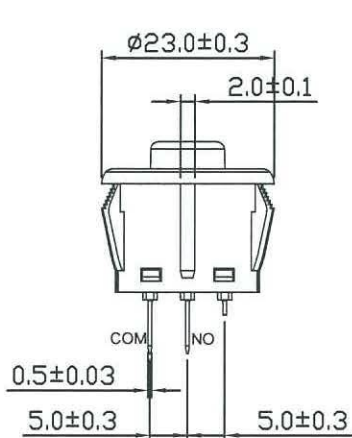

									△
									△
Date	Name	Descriptions							NO
Drawn	Checked	Approved	SCI BOM No.	1831181	Model Name	PUSH SWITCH			
B.S.Wang		王偉山	Customer No.		Model No.	SPR13-559B1-13-BBR			
10/12/12		11/7/12	Unit	mm					0