
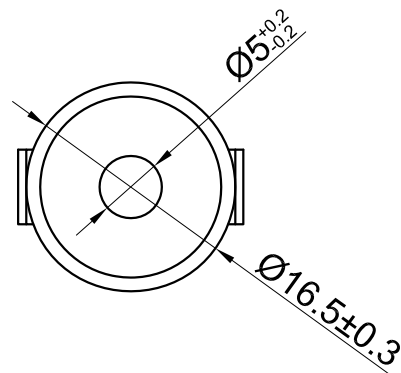


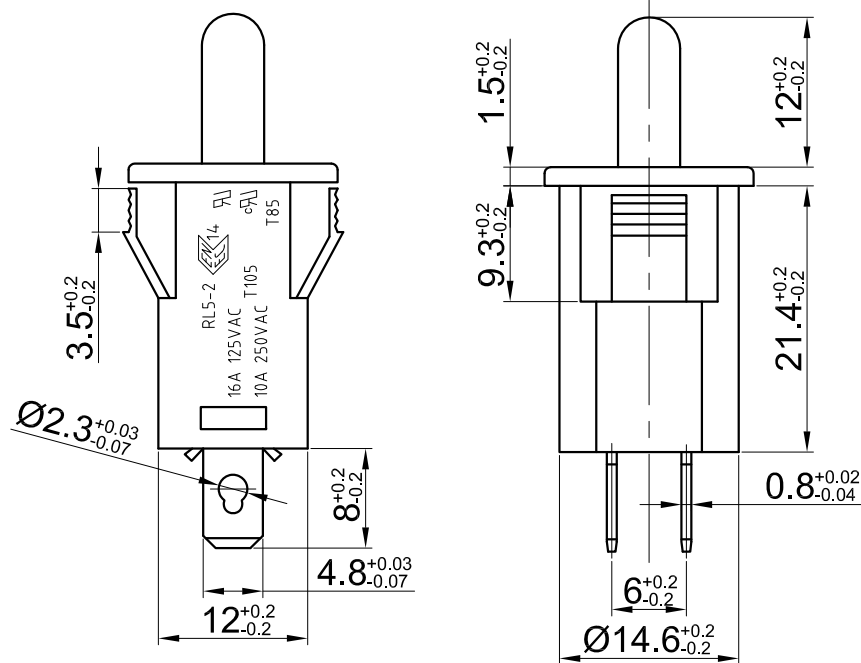


MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: Nylon #66 UL 94V-2
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: AgSnO₂In₂O₃ (10) / Cu

SPECIFICATION

1. RATING: UL C-UL: 16A 125VAC T105
ENEC SEMKO: 10A 250VAC
2. CIRCUIT: (ON)-OFF SPST
3. CONTACT RESISTANCE: 30m OHMS Max
4. INSULATION RESISTANCE: DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE: AC 1500V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION FORCE: 100 $\pm$ 30gf
8. OPERATION TEMPERATURE RANGE: -25 $\sim$ +125 $^{\circ}$ C

PANEL HOLE SIZE

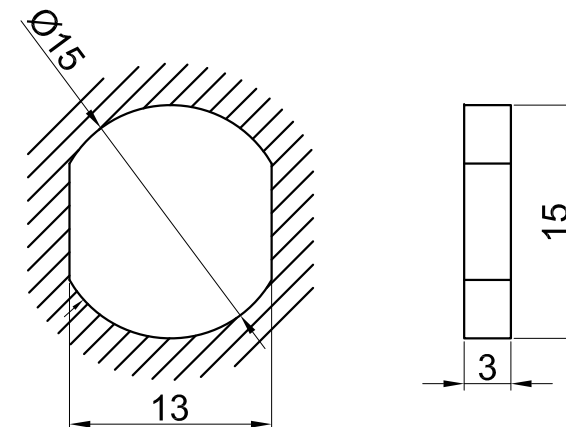

喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION						SPRL5-2-H-BK-P8-L2-L	
设计	签名	年月日	标准化	签名	年月日	PUSH SWITCH	SERIES SPRL5-2
绘图	符辉	14.02.19					FUNCTION (ON)-OFF
审核	张雪飞					VIEWS TYPE 	DRAWING NUMBER
工艺			批准				