
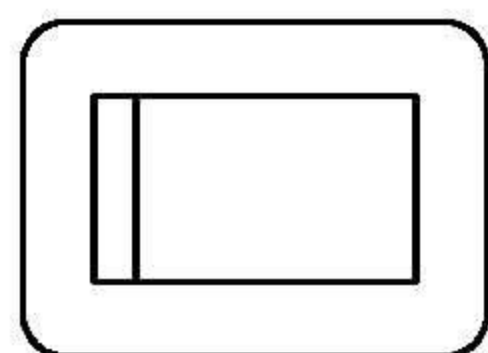


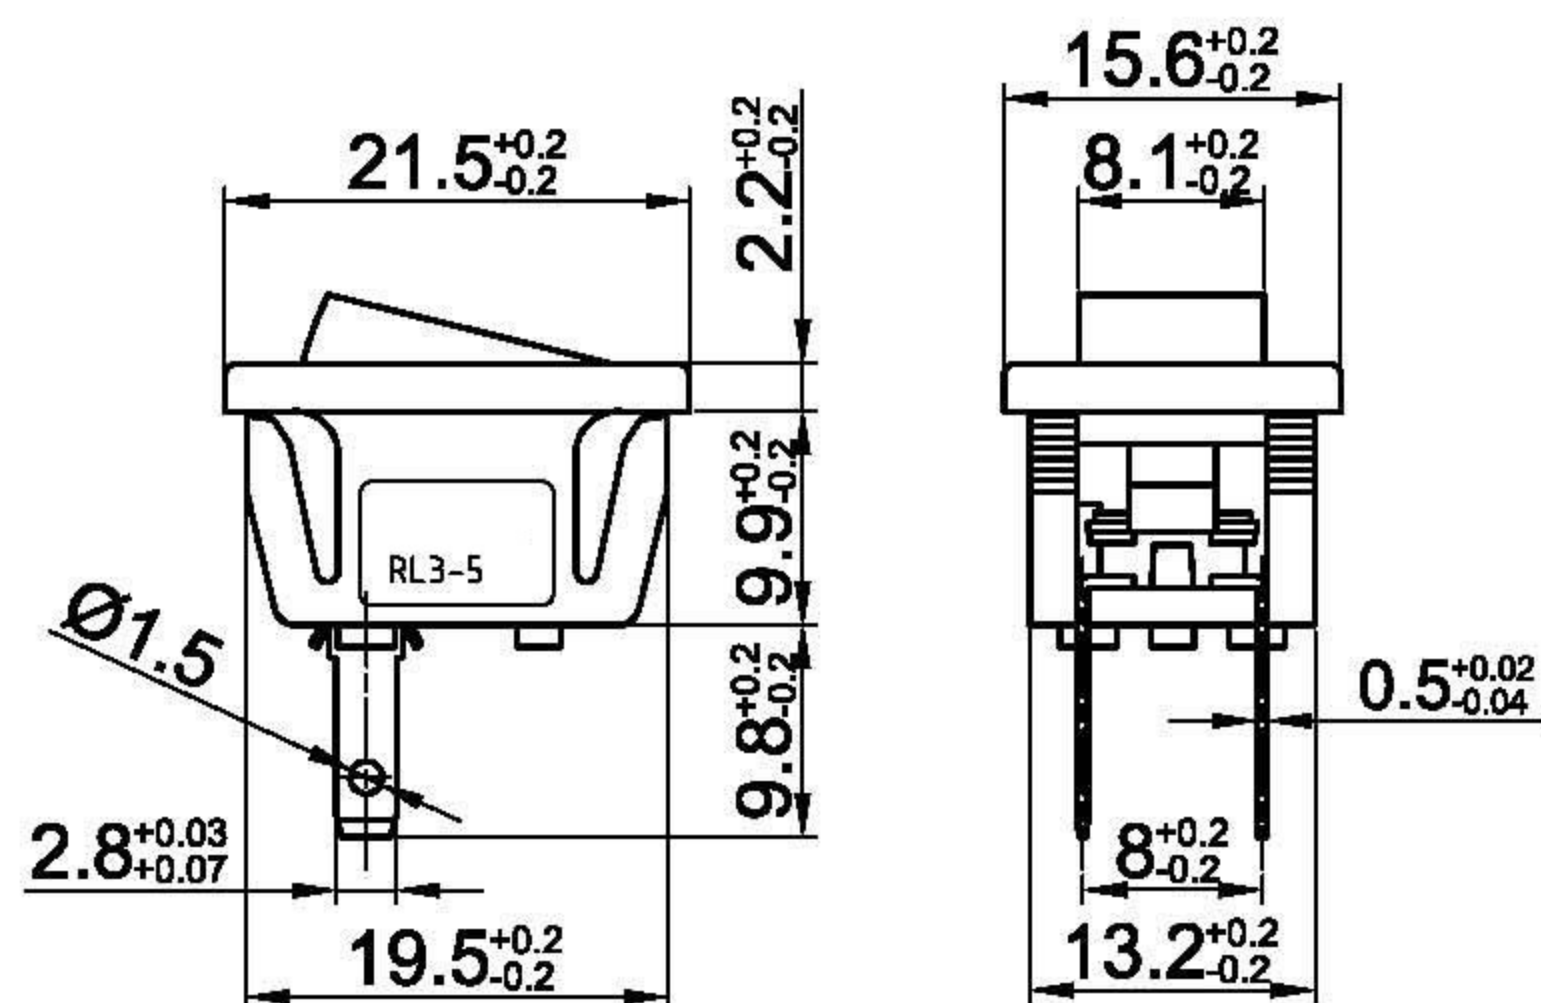

MATERIALS


1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: Nylon #66 UL 94V-2
3. TERMINAL: Copper Alloy Sn or Ag plated
4. CONTACTOR: $\text{AgSnO}_2\text{In}_2\text{O}_3(10)/\text{Cu}$

SPECIFICATION

1. RATING: 5A 250VAC T85 VDE
2. CIRCUIT: ON-(OFF) SPST 2P
3. CONTACT RESISTANCE: 30m OHMS Max
4. INSULATION RESISTANCE: DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE: AC 1500V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION PORCE: 200~600gf
8. OPERATION TEMPERATURE RANGE: $-25\sim 125^{\circ}\text{C}$

PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	19.2
1.25-2.0	19.4
2.0-3.0	19.6

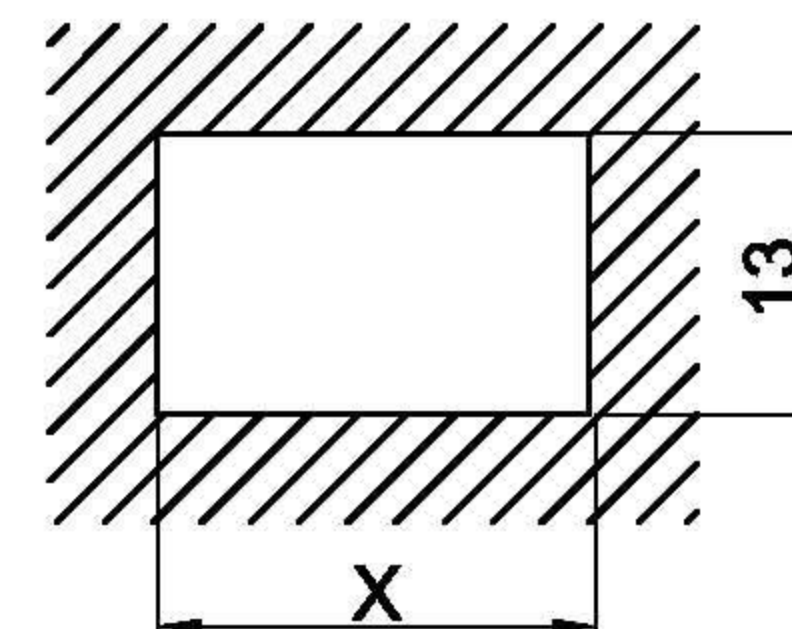

喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION						SPRL5-3-BK/BK-P31	
设计	签名	年月日	标准化	签名	年月日	ROCKER SWITCH	SERIES SPRL5
绘图	张仁阳	09.11.23					FUNCTION ON-(OFF)
审核	张雪飞					VIEWS TYPE 	DRAWING NUMBER
工艺			批准				