

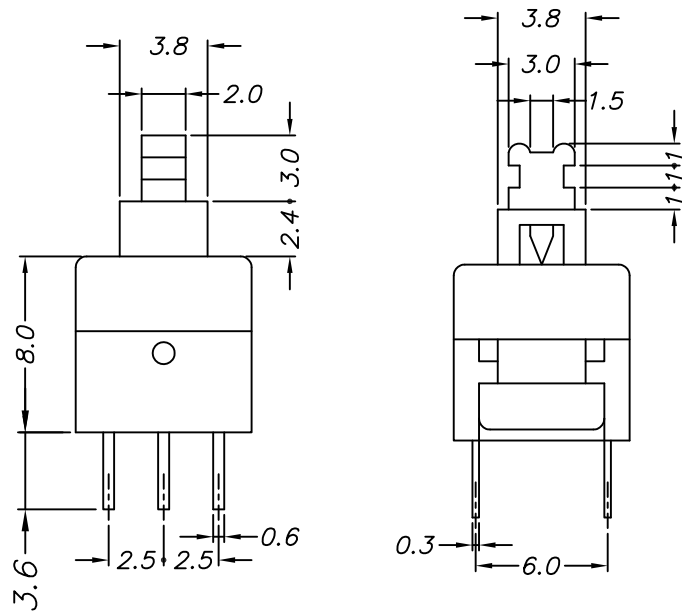


P.C.B. LAYOUT

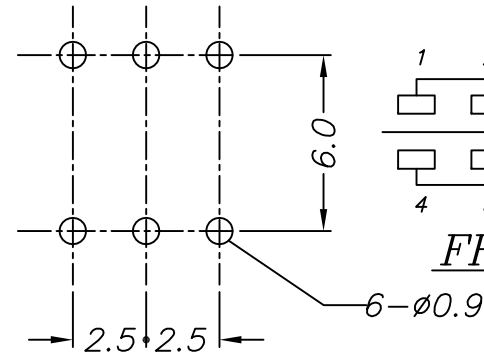


CIRCUIT

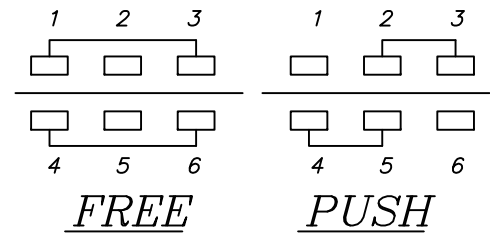


SPECIFICATIONS:

- 1.RATING: DC 30V 0.1A
- 2.OPERATING FORCE: 200±80gf
- 3.CIRCUIT: 2C-2P
- 4.STROKE: FULL 2.5mm
LOCK 1.5mm
- 5.GRNERAL TOLERANCE: ±0.2mm
- 6.LIFE: 10,000 CYCLES

Dimensions unless otherwise specified	
Size Range	Tolerance
$L \leq 1$	±0.15
$1 < L \leq 8$	±0.20
$8 < L \leq 23$	±0.25
$23 < L \leq 50$	±0.30
ANGEL	±1

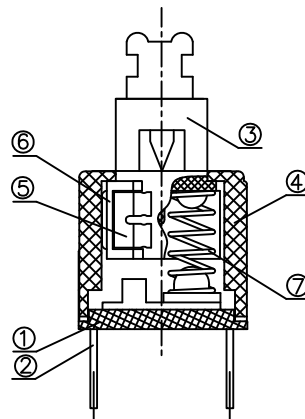

8	Plating		Sliver plating	
7	Spring	1	Carbon steel sire	
6	Crochet	1	Stainless steel	
5	Reed	2	Ag/copper	
4	Cover	1	PC	White Black
3	Stern	1	POM	Black Blue
2	Terminal	2	Silver-plated copper	Silver plating
1	Case	1	PA66	Black White
NO	PART NAME	QTY	MATERIAL	REMARK



單位
mm

比例
FREE

日期
2016-11-15

核准
WILLIAM

審核
AMY

設計繪圖
EWS

料號
品名

SPS800 (N,L) Series

頁數

1/1

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

WILLIAM

AMY

EWS

品名

PUSH SWITCH

圖號

SPS-2215(L)(N)-K

版本

B