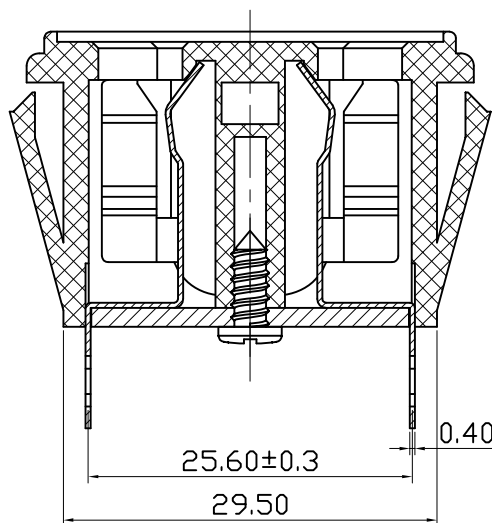
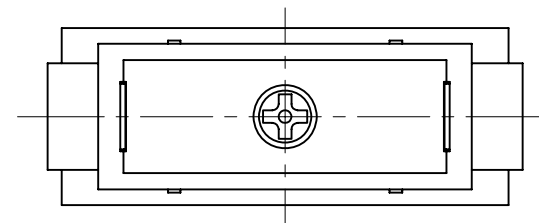
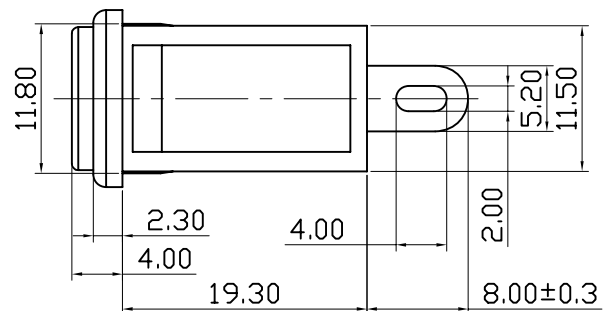
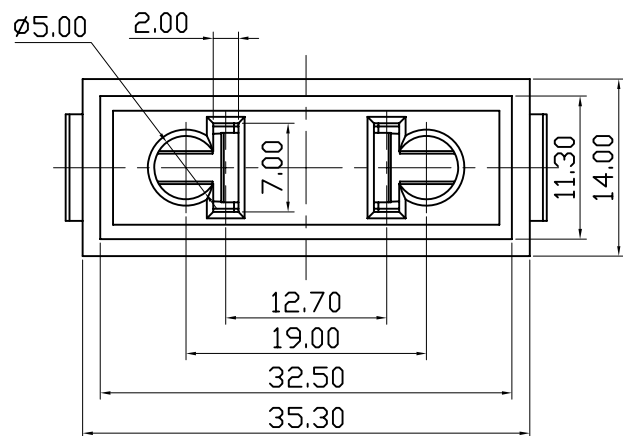


PANEL THICKNESS:1.0~1.5mm
PANEL HOLE SIZE

Rating : 10A 250V AC
Insert And Extract Force: 1.36kgf~6.8kgf
Terminal Strength: $\geq 80N$
Operating Life: ≥ 5000 cycles
Withstand Voltage: Between all terminals:2000VAC (50-60Hz)1min
terminals to Base:3750V AC (50-60Hz)1min
Leakage Current : 1mA
Insulation Resistance: $\geq 100M\Omega$ 500V DC

A4				普通公差	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION						
A3				COMMON TOLERANCE :							
A2				UP TO 5	±0.20	單位	mm	投影	Ac Outlet	比例	Free
A1				ABOVE 5 TO 30	±0.30	UNIT		PROJECTED	名	SCALE	
				ABOVE 30	±0.50	繪圖	吳瑜	核對	Ac Outlet	型號	SWSPB-203 (DB-F)
				ANGULAR	±5°	DRAWN BY		CHECKED BY	圖號	MODEL NO.	
REV.	DATE	REVISION DESCRIPTION	ISSUE			日期	2009.08.07	核准	圖號	DWG NO.	SWDB-F-M3
						DATE		APPROVAL BY			