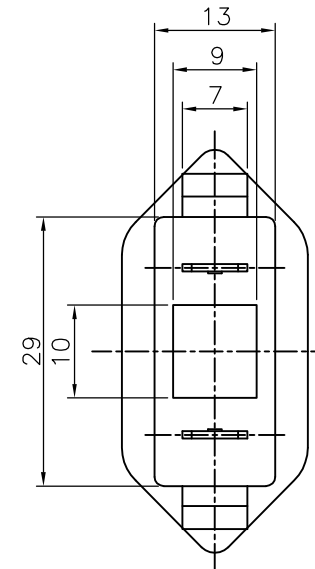
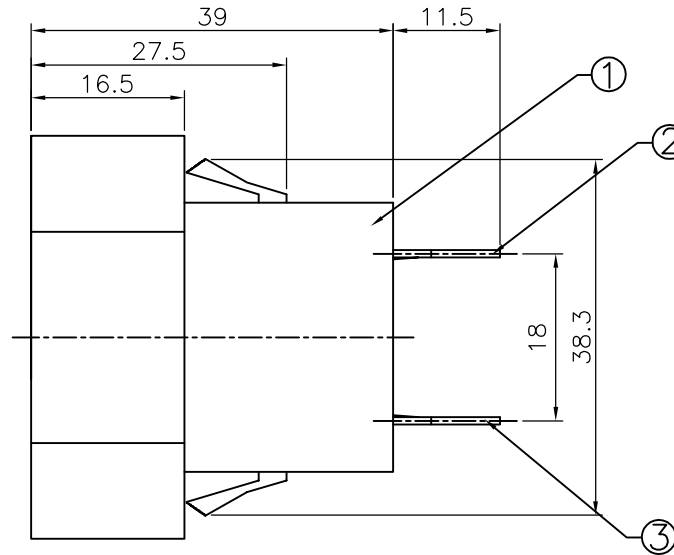
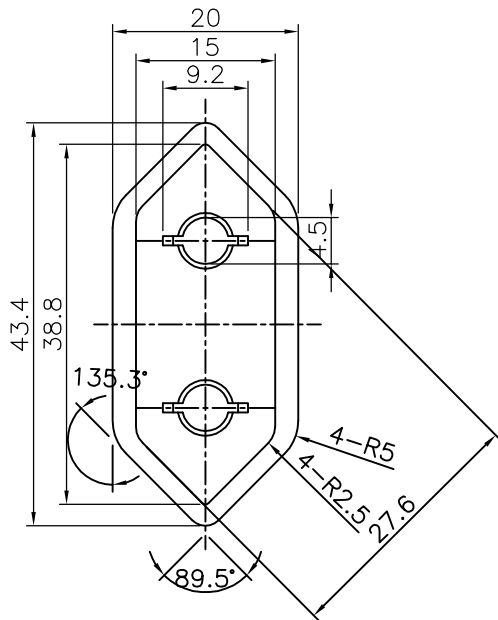


PANEL HOLE

SPECIFICATION			
RATING		2.5A/250 VAC	
DIELECTRIC STRENGTH	BODY TO TERMINAL	4,000 VAC at 1MIN.	
	TERMINAL TO TERMINAL	2,000 VAC at 1MIN.	
INSULATION RESISTANCE		100MΩMin./500 VDC	
NO.	NAME	MATERIAL	FINISH
1	BODY	PC 94V-0 (POLYCARBONATE)	BLACK
2	TERMINAL 1	C2680 1/2H t=0.8	Ni PLATED
3	TERMINAL 2	C2680 1/2H t=0.8	Ni PLATED

TOLERANCE		UNITS mm	NAME(INTENDED USE)	喜威達企業股份有限公司			
0~6±0.1	X.*±1.5°	MAT'L	AC POWER SOCKET	SWEETA PRODUCTS CORPORATION			
6~20±0.2	.X*±1°		PART NO.(INTENDED USE)	TITLE:			
20~90±0.3	.XX*±0.5°	FINISH	SWDTS-0043	CUSTOMER			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DIHTAIN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DIHTAIN PRECISION IND. CO., LTD.			Q'TY	APPD:	DWG NO.:		
			CHKD:	2008-0043-001			
			DR:		SCALE	SHEET	REV.
			CH 2008/11/14		N/A	1/1	B