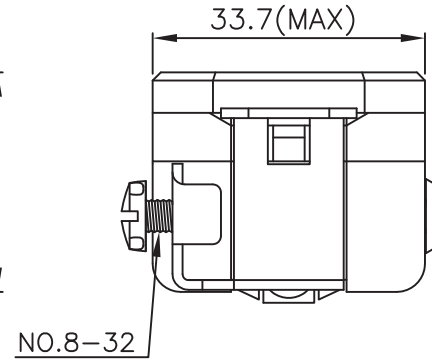
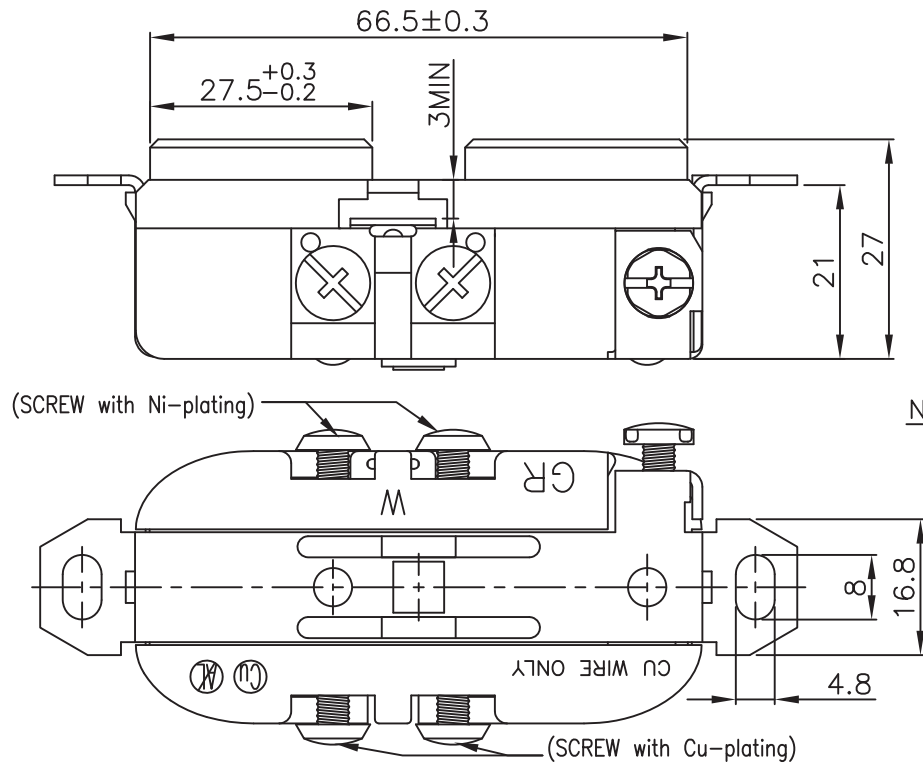
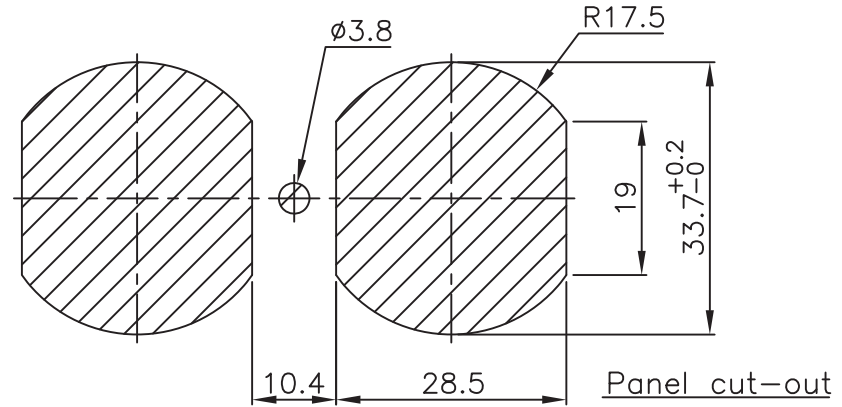
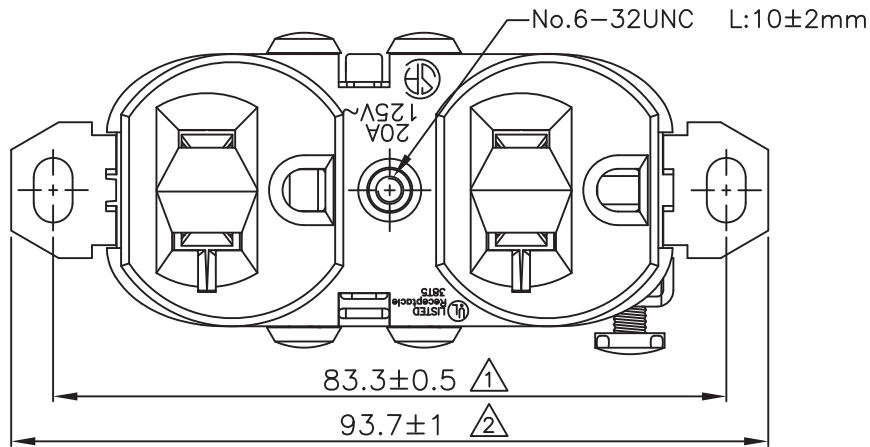


NOTES:

1. 20A-125V~,2P3W GROUNDING,NEMA 5-20R.
2. APPROVAL : UL/CSA
3. MOLD-GATE MARKS PERMISSIBLE.
4. TERMINAL SCREWS-IN ARE OPTIONAL.
5. COMBINATION HEAD SCREWS ARE OPTIONAL.

NO.	DESCRIPTION	APPROVED	DATE	ANGLE	±1°	GENERAL TOLERANCE	GRADATION	TOLERANCE	approved	checked	designed	drawn	ALL SIZE ARE IN	MM	DRAWING NO.
5	→					GENERAL TOLERANCE			approved	checked	designed	drawn	ALL SIZE ARE IN	MM	DRAWING NO.
4	→					GRADATION			checked	designed	drawn		SCALE	1:1	
3	→					X		±0.4	designed	drawn			MAT'L	**	
2	93.7±0.5 → 93.7±1					X.X		±0.3	drawn				MATERIAL NO.		
1	83.3±0.3 → 83.3±0.5					X.XX		±0.1					SWE-09-A1		
NO.	DESCRIPTION	APPROVED	DATE	ANGLE	±1°	SWEETA PRODUCTS CORPORATION							(6012 204 2000)		851272