

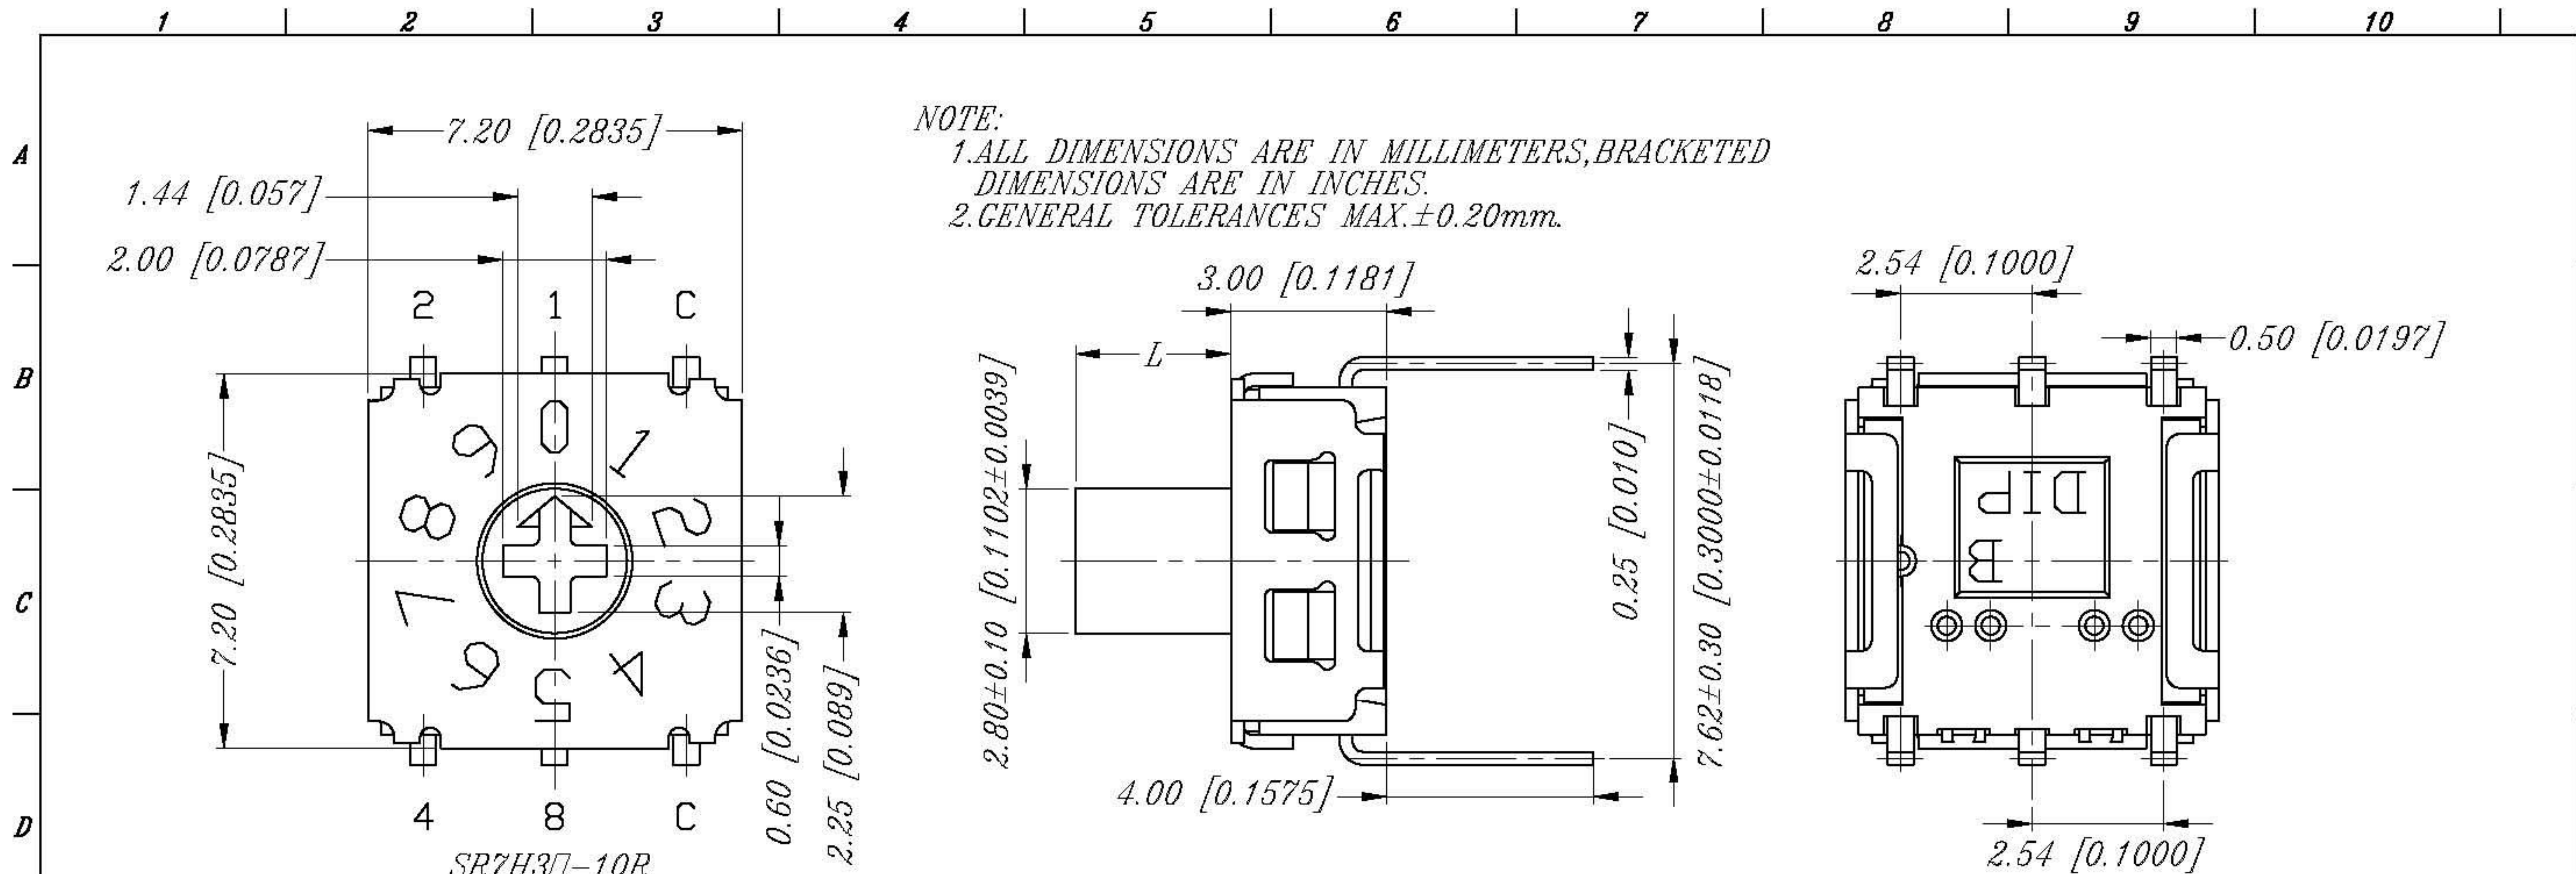


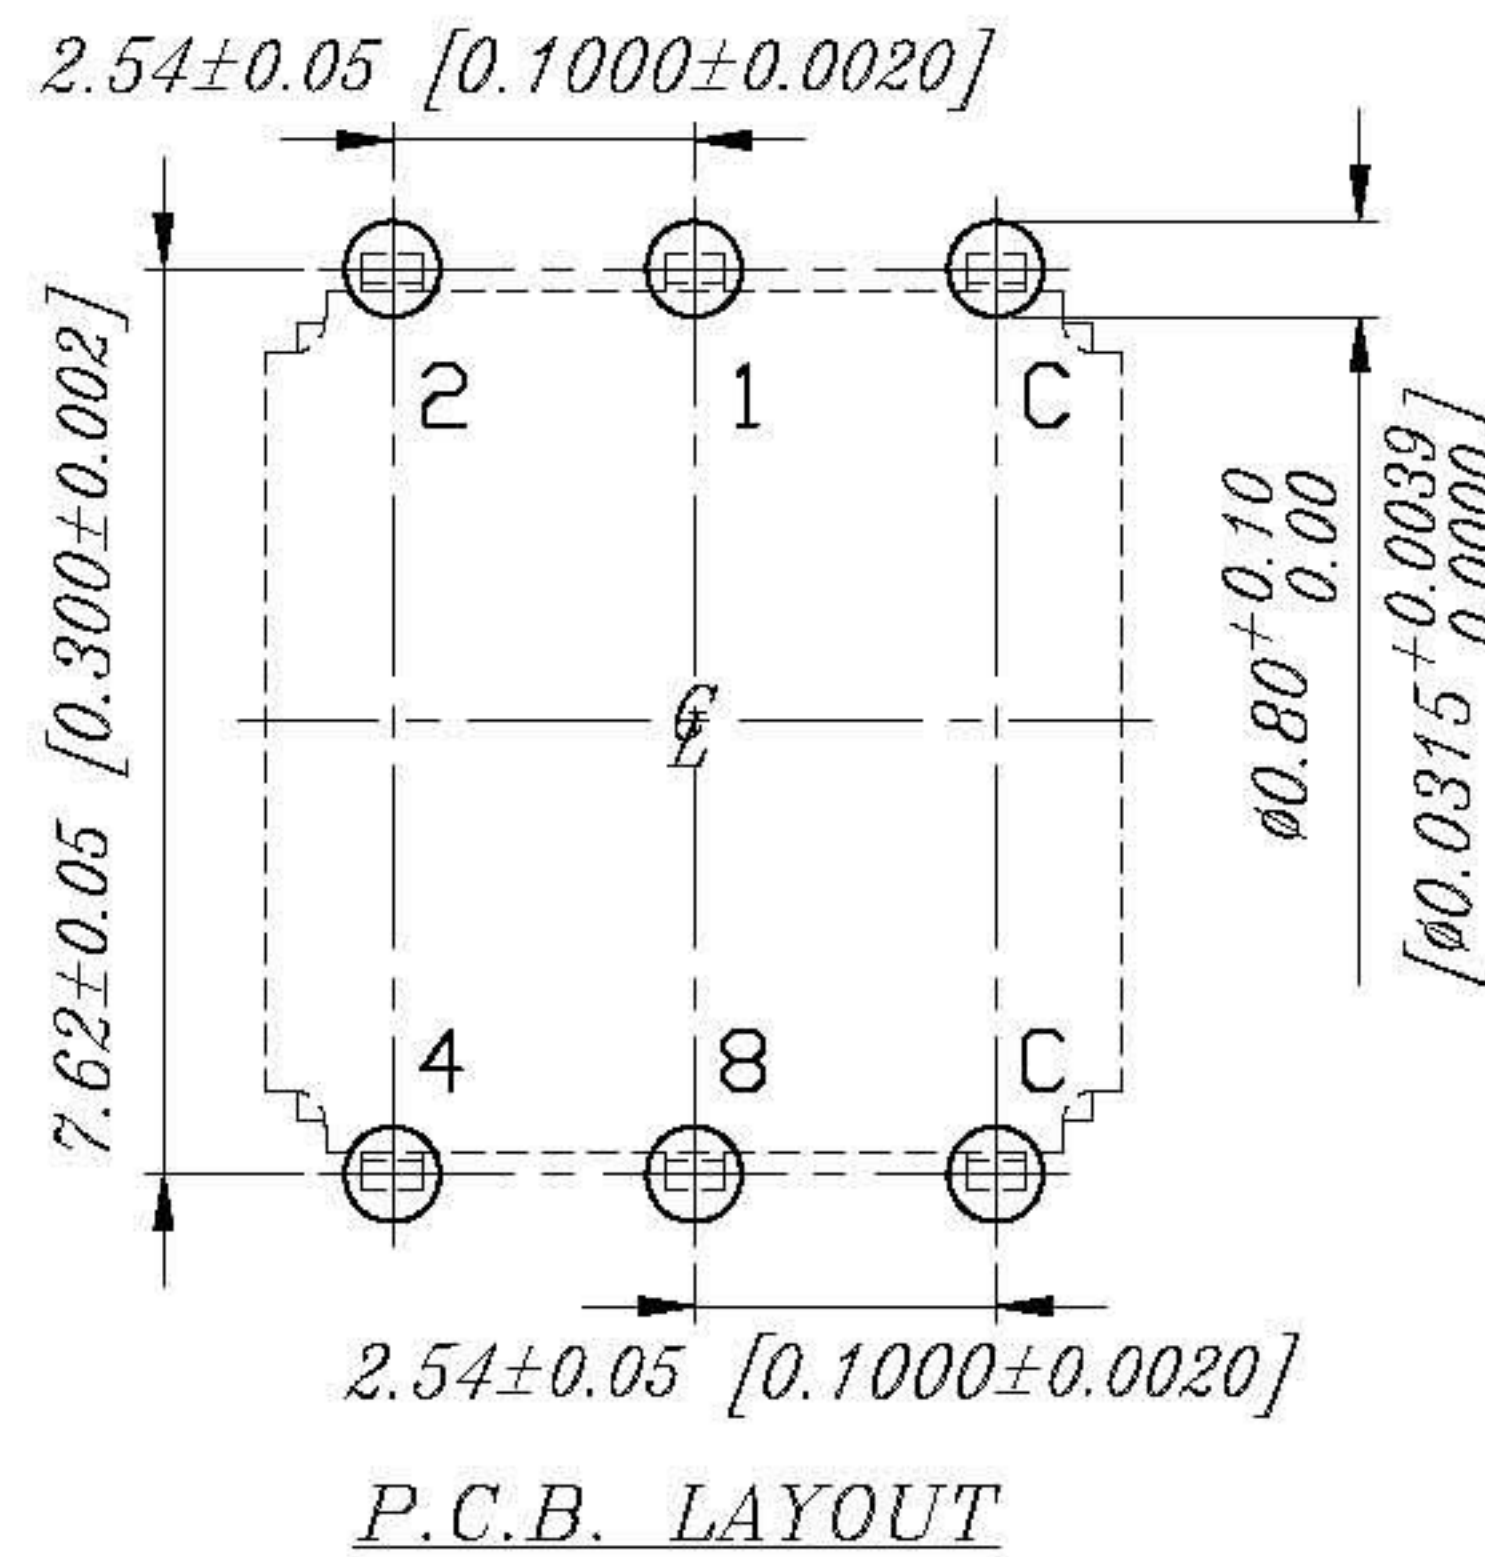

NOTE:
1.ALL DIMENSIONS ARE IN MILLIMETERS,BRACKETED
DIMENSIONS ARE IN INCHES.
2.GENERAL TOLERANCES MAX.±0.20mm.

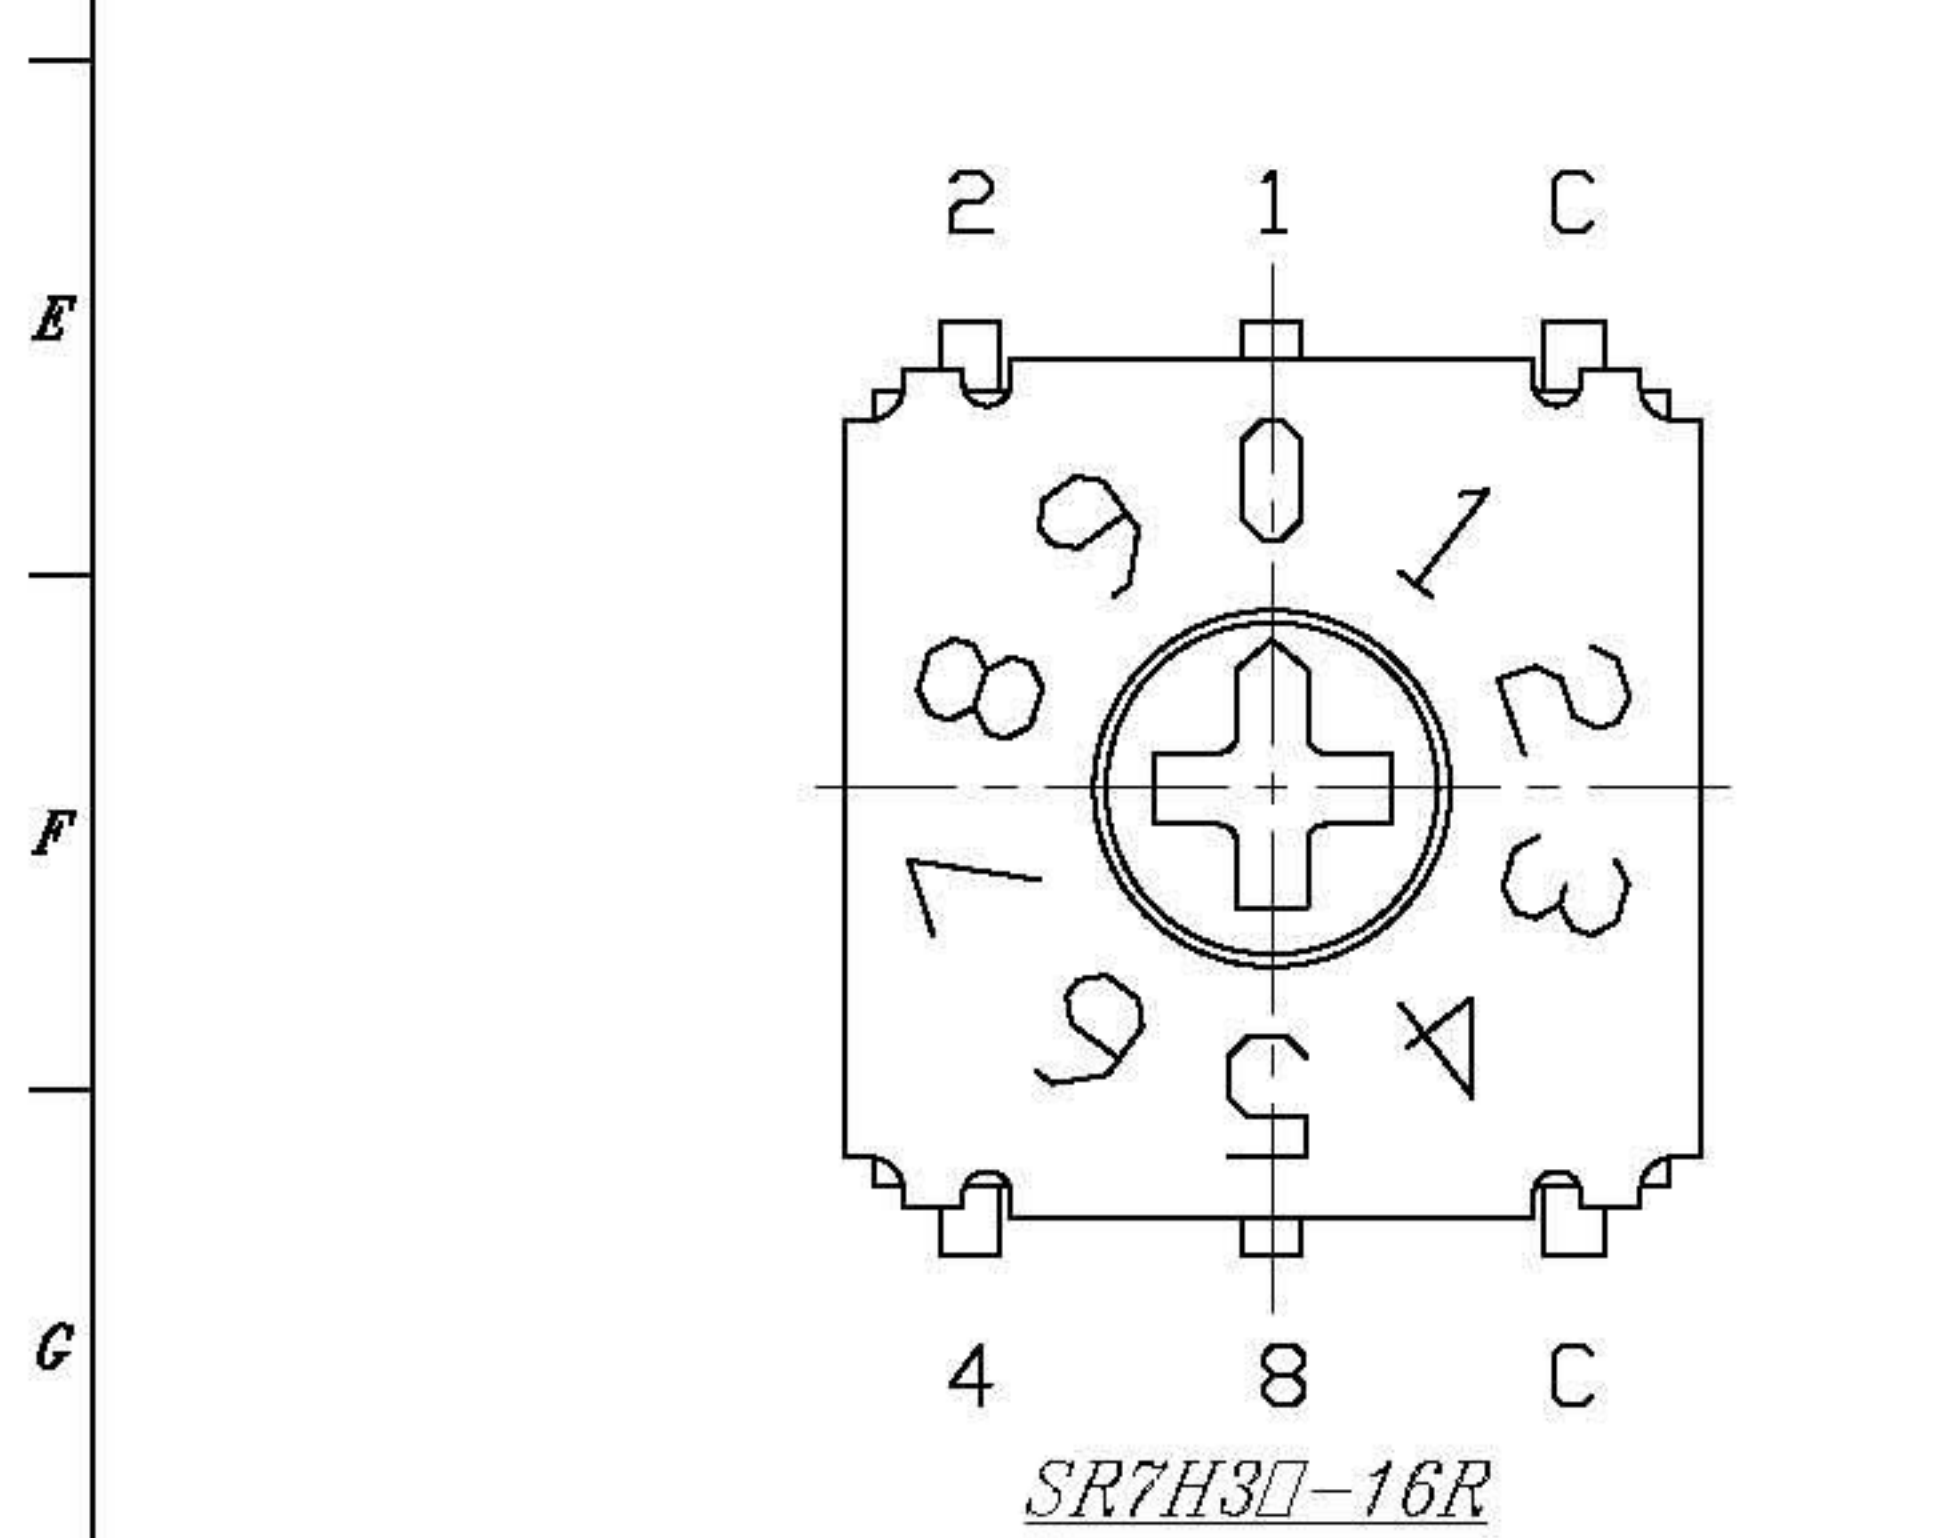

		CODE			
TYPE	POSITION	1	2	4	8
	□□R				
10 STEP	0	●	●	●	●
	1	○	●	●	●
	2	●	○	●	●
	3	○	○	●	●
	4	●	●	○	●
	5	○	●	○	●
	6	●	○	○	●
	7	○	○	○	●
	8	●	●	●	○
	9	○	●	●	○
16 STEP	A	●	○	●	○
	B	○	○	●	○
	C	●	●	○	○
	D	○	●	○	○
	E	●	○	○	○
	F	○	○	○	○

CIRCUIT CHART

ZONE	REV.	DESCRIPTION	DATE	APPD.
A		DWG.REL	07.09.01	

NAME	L
SR7H3-10RA-V	0
SR7H3-16RA-V	0
SR7H3H-10RA-V	3.00 [0.1181]
SR7H3H-16RA-V	3.00 [0.1181]

APPD:	Q'TY:
CHKD:	SCALE: 10:1
DR: 07.09.01 Chien	REV: A
DESIGN: Chien	UNITS: mm

喜威達企業股份有限公司	
SWEETA PRODUCTS CORPORATION	
PART NO:	MAT'L:
SR7H3□-10RA-V	FINISH:

PART NAME:	ROTARY 7X7
DWG NO:	RD12P73B

ITEM	DESC	Q'TY	METERIALS	TREATMENT	REMARK
1	COVER	1	NICKEL SILVER	—	—
2	SEAL-1	1	SILICONE RUBBER	MOLDED BLACK	—
3	SEAL-2	1	SILICONE RUBBER	MOLDED BLACK	—
4	ACTUATOR	1	HIGH - TEMP THERMOPLASTIC NYLON UL94V - 0	MOLDED RED	—
5	BLOCK	1	STAINLESS STEEL	—	—
6	CONTACT	1	ALLOY COPPER	GOLD PLATED	—
7	SPRING PLATE	1	PIANO WIRE	—	—
8	BASE	1	HIGH - TEMP THERMOPLASTIC NYLON UL94V - 0	MOLDED BLACK	—
9	TERMINAL	1	BRASS	GOLD PLATED	—

PROD. NO. : SR7 ☐ ☐ ☐ - ☐ ☐ R ☐ ☐ - V - ☐

Package :
B = Tube
T/R = Tape & Reel

Soldering :
V = Lead Free Solderable

☐ = Without Ground Terminal
G = With Ground Terminal (S.M.T Only)

A = Cross-head Actuator
B = Flat-head Actuator

R = Real Codes

Number Of Steps :
10 = 10 Steps
16 = 16 Steps

Actuator Type :
☐ = Recessed Actuator
H = High Actuator (3.0 mm)

Number Of Terminals :
3 = 3×3
4 = 4×1

Termination Type :
M = S.M.T
H = Through Hole
V = Right Angle
A = S.M.T Right Angle (4×1 Only)

Rotary Type 7×7

			TITLE : ROTARY TYPE SWITCHES 7×7	APPD. : CHKD. :
A1	DWG.REL		PRROD. NO. : SR7 ☐ ☐ ☐ - ☐ ☐ R ☐ ☐ -V	PR. : Vicky 09.14.'06
REV.	ECO. NO.	APPD.	FILE NO. : E-V-CR05	REV. : A1 SHEET : 1/1