



- 1、All dimensions in mm [Inch]  
2、General tolerance :  $>10\pm0.4$   
 $<10\pm0.25$   
3、Electrical rating : 3A 250VAC &3A 125VAC  
4、Contact resistance :  $<20\text{m}\Omega$  (initial)  
5、Insulation resistance :  $>1000\text{M}\Omega$  (500DC between open contacts)  
6、Dielectric strength :  $>1500\text{V}$  1 minute  
7、Mechanical life :  $>30000$  cycles  
8、Electrical life:  $>10000$  cycles  
9、Temperature rise at the terminal : Max.30℃  
10、Solder ability of terminal : Max350℃,3S(no pressure may be placed in the terminals when soldering by hand)  
11、Any Cd Pb Hg etc and it's compounds is not include in this product  
12、Ambient temperature: 10T85/55  
13、Ambient humidity: Max.85%  
14、Degree of protection: IP20  
15、Applicability for appliance of class: class II  
16、Proof tracking resistance index(PTI): 175  
17、Degree of pollution: normal





CIRCUIT SPST

| POLE FUNCTION | OPTIONS OF FUNCTION |   |     |
|---------------|---------------------|---|-----|
|               | A                   | — | B   |
| SPST          | 1-1a                | — | OFF |

| PANEL OUT-CUT       |                       |
|---------------------|-----------------------|
| Y                   | X                     |
| 8.7-8.9 [.338-.354] | 13.5-13.7 [.528-.543] |



P.C MOUNTING

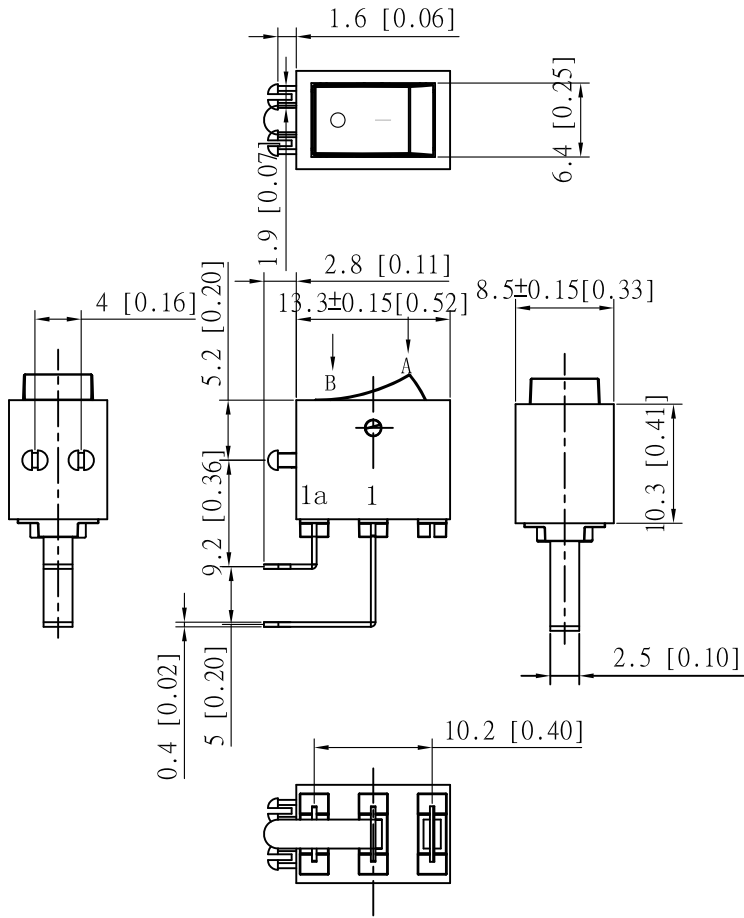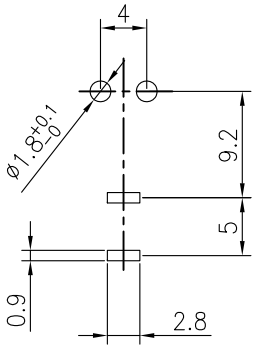

| Color          | Housing | Actuare |
|----------------|---------|---------|
| K(Black)       | ✓       | ✓       |
| W(White)       |         |         |
| R(Red)         |         |         |
| G(Gray)        |         |         |
| O(Orange)      |         |         |
| B(Blue)        |         |         |
| Y(Ill. Yellow) |         |         |
| M(Ill. Green)  |         |         |
| F(Ill. Blue)   |         |         |
| T(Ill. White)  |         |         |
|                |         |         |
|                |         |         |
|                |         |         |
|                |         |         |

|   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|
|   |   |   |   |   |   |   |   |   |
| A | B | C | D | E | F | G | H | I |
|   |   |   |   |   | ✓ |   |   |   |

|            |                  |                                            |         |          |               |      |     |
|------------|------------------|--------------------------------------------|---------|----------|---------------|------|-----|
| Part No.   | SMRA1KKFROBCA-BR | 喜威達企業股份有限公司<br>SWEETA PRODUCTS CORPORATION |         |          |               |      |     |
| Dwg. NO.   | MRA1-110711      |                                            |         |          |               |      |     |
| Series NO. | MRA              | Drawing                                    | lizhili | Auditing | wangchangjian |      |     |
| Dwg Name   | Specification    | Scale                                      | 2:1     | Date     | 11/07/11      | Page | 1/1 |

\* We keep the right to alter the dimension without notice.