





Rating	16A 125VAC,10A 250VAC 	Mounting Hole	Circuit Diagram
	10A 125VAC,6A 250VAC CQC		
	10(4)A 250V~ 		
Contact Resistance	50m ohm Max.		 R=150K ohm
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-20°C ~ 85°C		
Switch Function	3P SPST ON-OFF(Illuminated)		







*Material

Frame: Nylon#66+33%GF, Black

Lens: PC

Terminal: Copper alloy, Silver plated

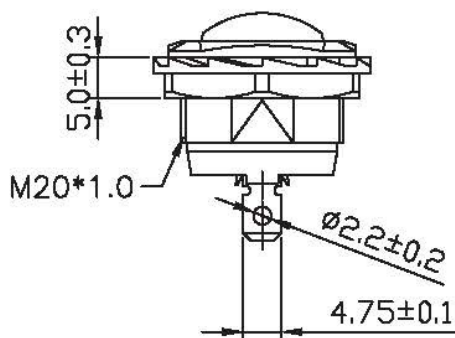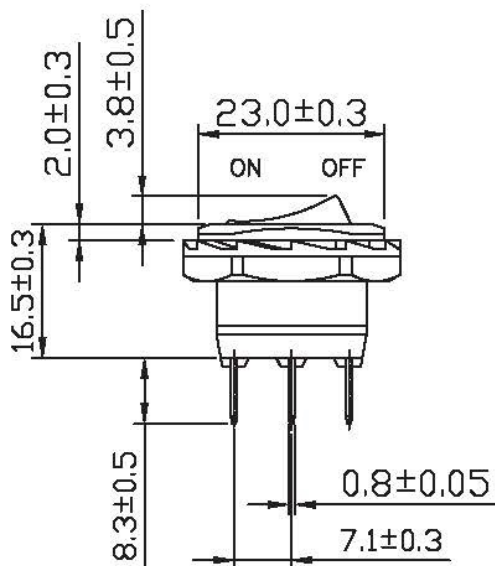

1820952	yellow Clear	Red
1820955	Green Clear	Green
1820947	Red Clear	Red
SCI NO.	Lens Color	Neon Light Color

							
01/15/'10	歐陽安	Accord UL approval information to update drawing.					
Date	Name	Description				NO	
Drawn	Checked	Approved	SCI BOM No.	SEE TABLE	Model Name	ROCKER SWITCH	
歐陽安		王佰山	Customer No.		Model No.	SR13-135B-02	REV.
01/15/'10		03/16/'10	Unit	mm	SWEETA PRODUCTS CORPORATION		1