





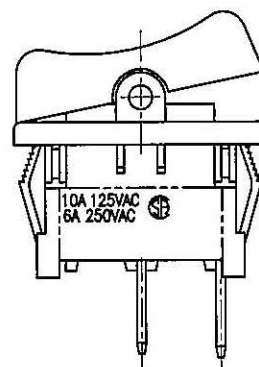


Rating	10A 125V AC, 6A 250V AC		Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~115°C			
Switch Function	2P SPST ON-OFF			
			Thickness	
			0.75~1.25	19.2~0.1 13+0.1
			1.25~2.0	19.4~0.1 13+0.1
			2.0~3.0	19.8~0.1 13+0.1

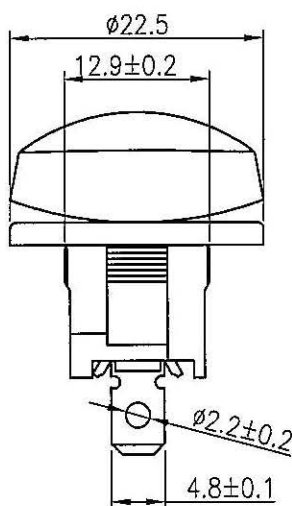

Material:
Frame: Nylon#66, Black
Actuator: Nylon#66, Black
Printed: None

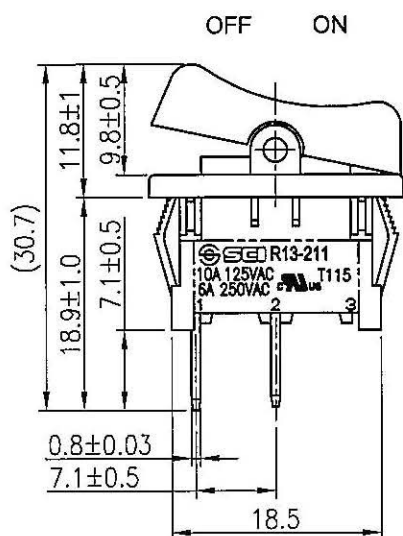

Tolerances Unless Otherwise Specified $\pm 0.3\text{mm}$

									△
									△
Date	Name			Description					NO
Drawn	Checked	Approved	SCI BOM NO.	1820977	Model Name	ROCKER SWITCH			
曹盈芳		王作山	Customer No.		Model No.	SR13-211A-02		Rev.	
06/24/13		6/24/13	Unit	mm	SWEETA PRODUCTS CORPORATION			0	