



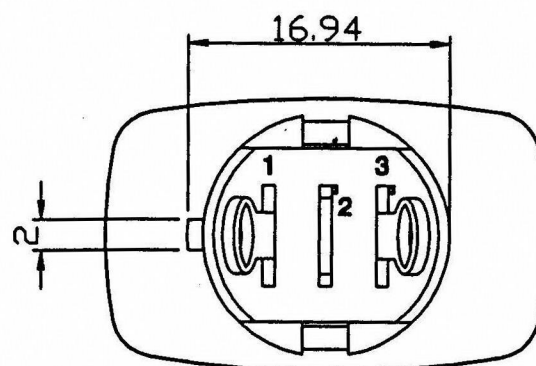


規格 Rating	10A 125VAC/6A 250VAC	裝配孔 Mount Hole	線路圖 Circuit Structure
接觸電阻 Contact R	50m ohm Max.		 R= 33K ohm for 110~125VAC R= 150K ohm for 220~250VAC
絕緣電阻 Insulation R	DC 500V 100M ohm Min.		
耐電壓 Dielectric Strength	AC 1500V 1 minute		
動作特性 Circuit	3P SPST ON-OFF (Illuminated)		
Operation force	400g ±150g		

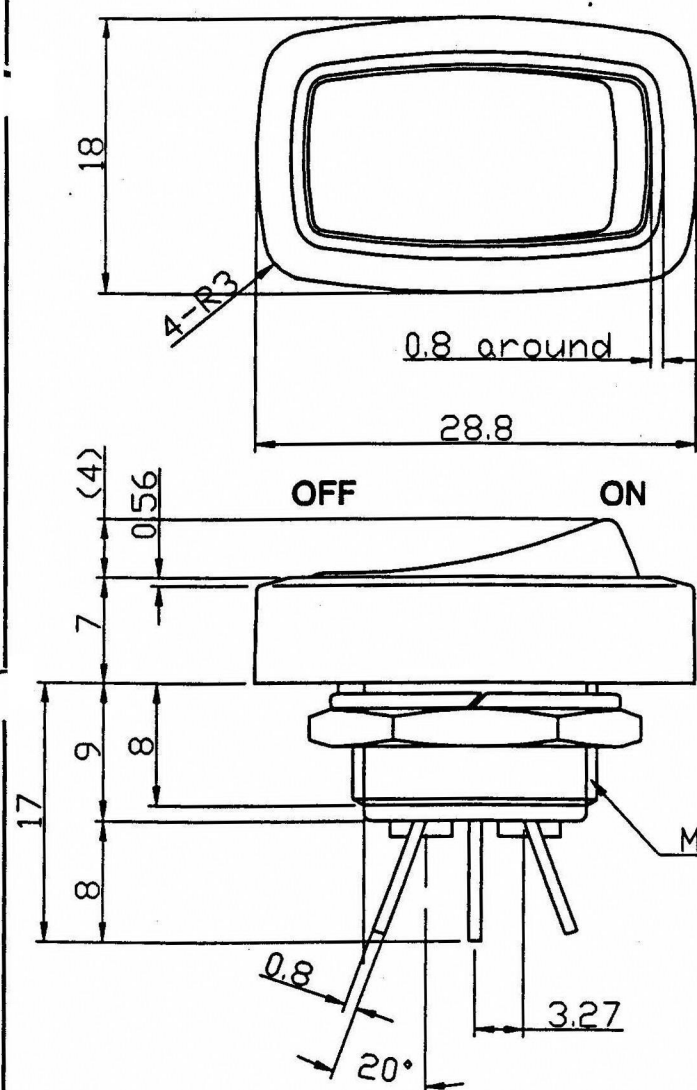

Bottom view



Tolerance ±0.3 except noticed.

Customer No.	No.	Date	Name	Descriptions
SCI No.				
Model No.	SR13-228B			
Drawing	Check	Approval		
				