




Rating	6A 125V, 3A 250V AC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
		Thickness 0.75~3	



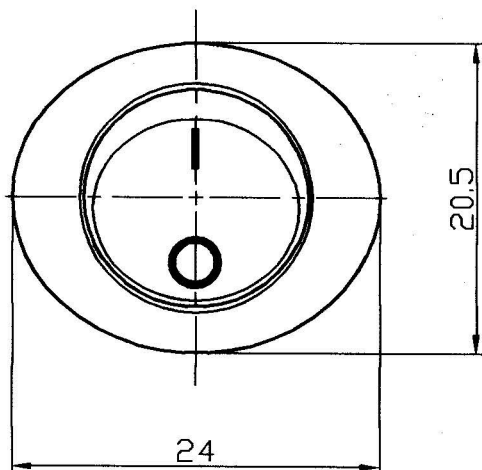


Small Rocker Switch
R13-234 Series


R13-234

Mark Printed

Circuit Option	
A	2P SPST ON-OFF
C	3P SPDT ON-ON
D	3P SPDT ON-OFF-ON
I	3P SPDT (ON)-OFF-(ON)

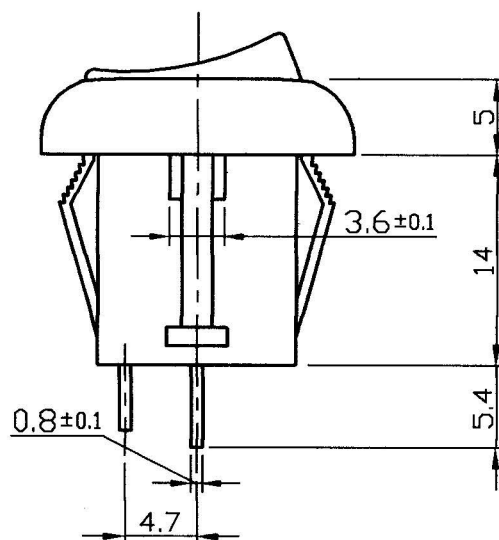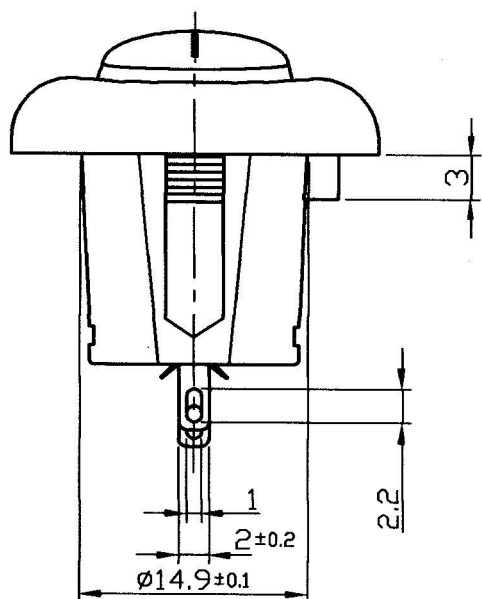

Tolerance: ± 0.3 except noticed

Customer No.	No.	Date	Name	Descriptions
SCI No.				
Model No.	SR13-234A			
Drawing	Check	Approval		
Joanne				
88/11/24	88/11/24	11/24-PP		

喜威達企業股份有限公司