



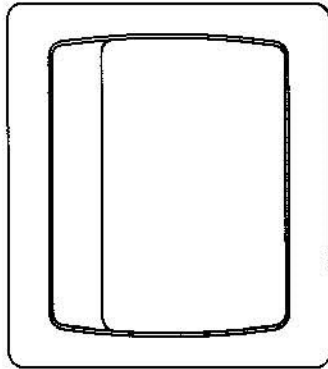


Rating	10A 125V, 6A 250V AC	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Switch Function	4P DPST ON-OFF(Illuminated)		
		Thickness	
		0.75...1.25	19.4-0.1 22.2+0.1
		1.25...2	19.6-0.1 22.2+0.1
		2...3	20.2-0.1 22.2+0.1

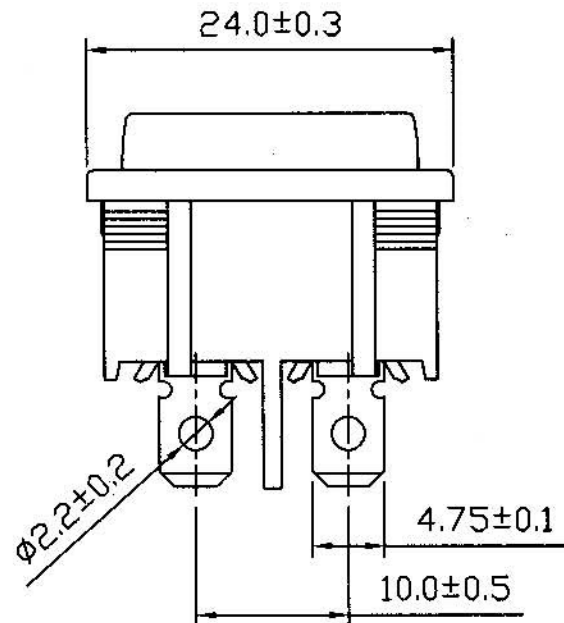

Material:
Frame: Black, Nylon# 66
Actuator: Green, PC
Printed: None

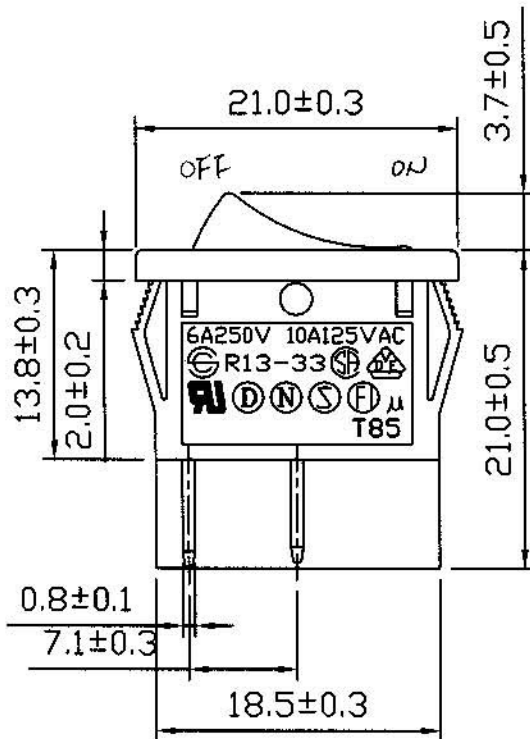

C8\R13\SR13-33B-02(1820117)

Date	Name	Description							
Drawn	Checked	Approved	SCI BOM NO.	1820117	Model Name	ROCKER SWITCH			
曹盈芳	王/13/07	王/13/07	Customer No.		Model No.	SR13-33B-02	REV.		
09/12/'07	9/13/07	9/13/07	Unit	mm	SWEETA PRODUCTS CORPORATION				0