


- 1、ALL DIMENSIONS IN mm [INCH]
- 2、GENERAL TOLERANCE : >10±0.4<10±0.25
- 3、ELECTRICAL RATING : 16A 250VAC & 20A 125VAC
- 4、CONTACT RESISTANCE : <20mΩ(initial)
- 5、INSULATION RESISTANC : > 1000MΩ(500VDC between open contacts)
- 6、DIELECTRIC STRENGTH : >1500V 1 mintute
- 7、MECHANICAL LIFE : >30000 cycles
- 8、ELECTRICAL LIFE : >10000 cycles
- 9、TEMPERATURE RISE AT THE TERMINAL : Max.30℃
- 10、SOLDER ABILITY OF TERMINAL : Max350℃,3S(no pressure may be placed in the terminals when soldering by hand)
- 11、Any Cd Pb Hg etc and it's compounds is not include in this product

():MOMENRARY

POLE FUNCTION	OPTIONS OF FUNCTION		
	A	CENTER	B
SPDT	(1-1a)	OFF	(1-1b)

PANEL CUT-OUT		
Z	Y	X
0.7~1.25 [.028~.049]	11.1~11.2 [.437~.441]	29.6~29.7 [1.165~1.169]
1.25~2.0 [.049~.079]	11.1~11.2 [.437~.441]	30.1~30.2 [1.185~1.189]
2.0~3.0 [.079~.118]	11.1~11.2 [.437~.441]	30.45~30.55 [1.199~1.203]

* We keep the right to alter the dimension without notice.

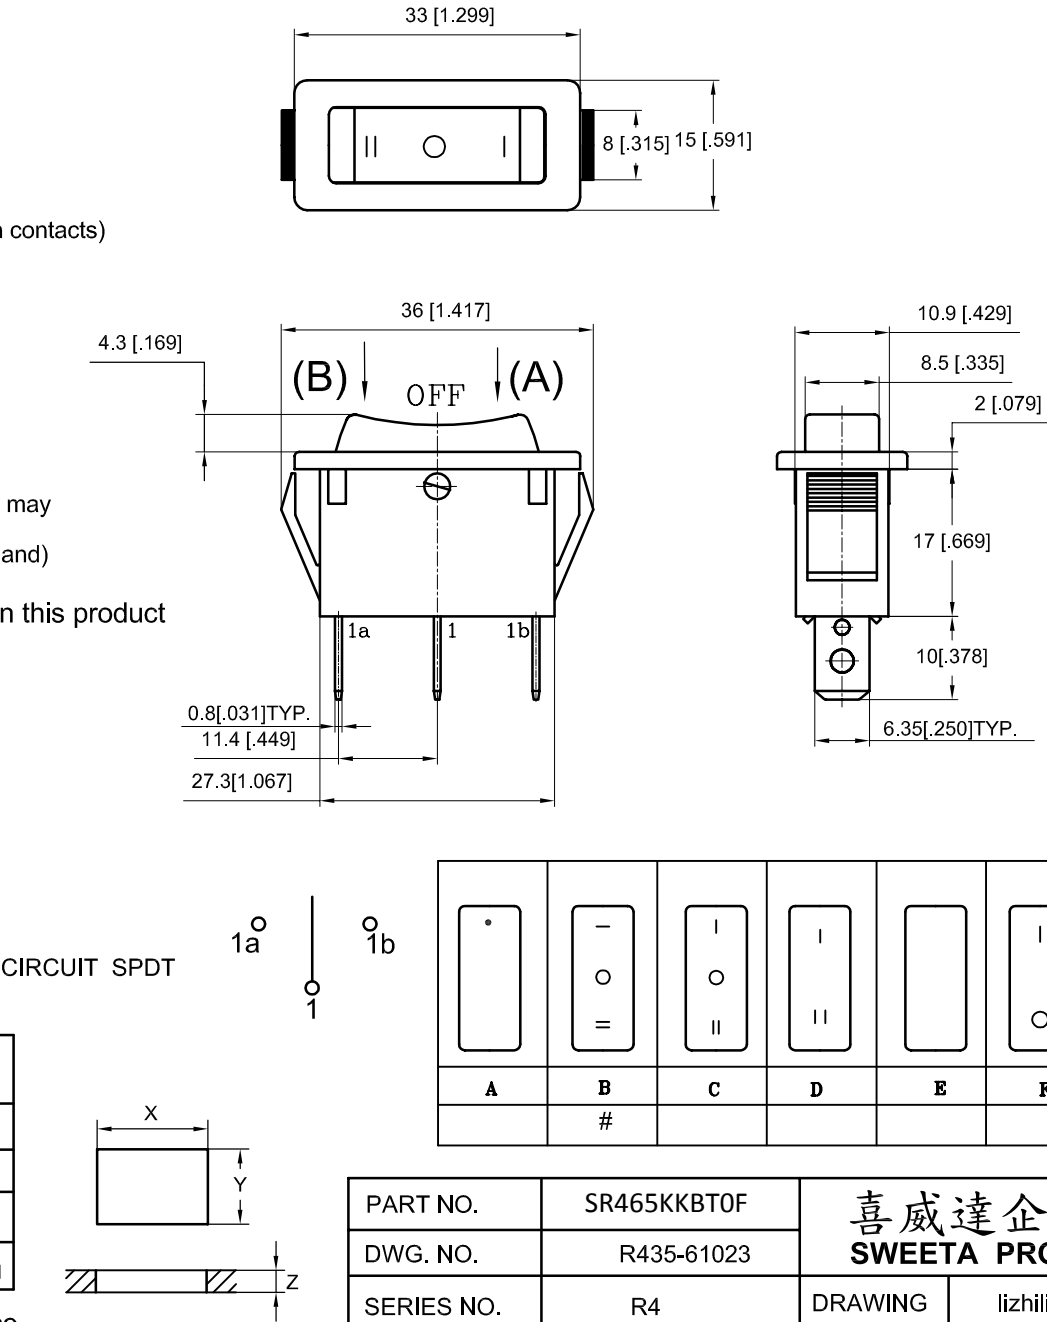

Color	Housing	Actuator
K(Black)	#	#
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(III. Green)		
F(III. Blue)		
T(III. White)		
D(III. Red)		

A	B	C	D	E	F	G	H	I
	#							

PART NO.	SR465KKBT0F	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION						
DWG. NO.	R435-61023							
SERIES NO.	R4	DRAWING	lizhili	AUDITING	wangchangjian			
DWG NAME	SPECIFICATION	SCALE	1.5:1	DATE	10/23/06	PAGE		