

Panel Cutout

Specification :

Contact resistance: 20mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500V DC)

Dielectric strength: 1,500V AC 50/60 Hz for 1 minute

Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating : 15A 12V DC / 10A 24V DC

Function: ON - NONE - OFF DPST Illuminated

POS 1





POS 3

Red or Amber Lens

POS 1

POS 2

POS 3

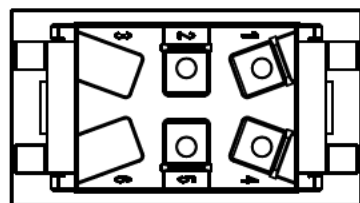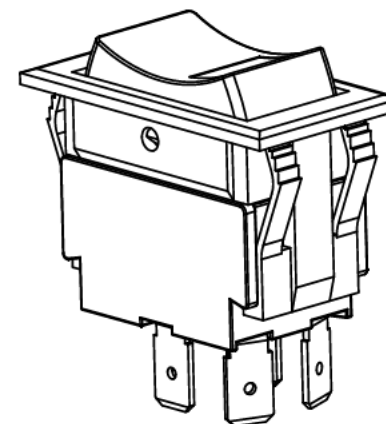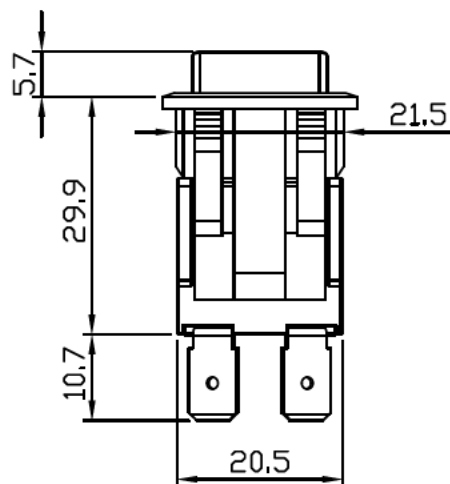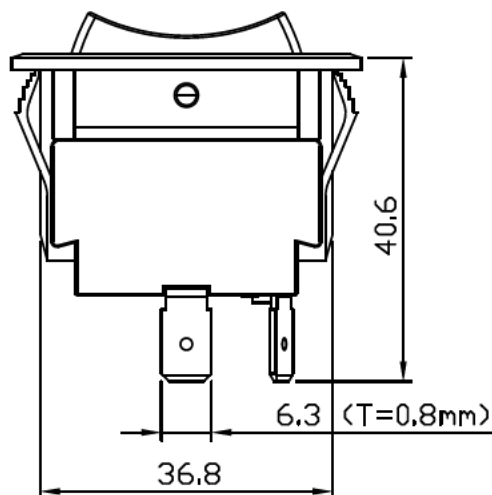

TOLERANCES		UNLESS NOTED	
X.	± 0.3	MIN WALL THICKNESS	
X.X	± 0.2	MAX. DRAFT 2 / SIDE	
X.XX	± 0.1	ALL RADII	
DATE:	DRAWN:	PROJ:	EX.NO.
5-28-2010	C. H. SHIU	W.D. CHEN	
NAME Rocker Switch (Illuminated)			
UNIT	SCALE	PROD. NO	REV.
■ m/m □ inch	1 : 1	SRSW-2704-A2-1L	W.H. YEH

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

Material :

Finished :