



ITEM NO. STGGB-10 SERIES PITCH 10mm

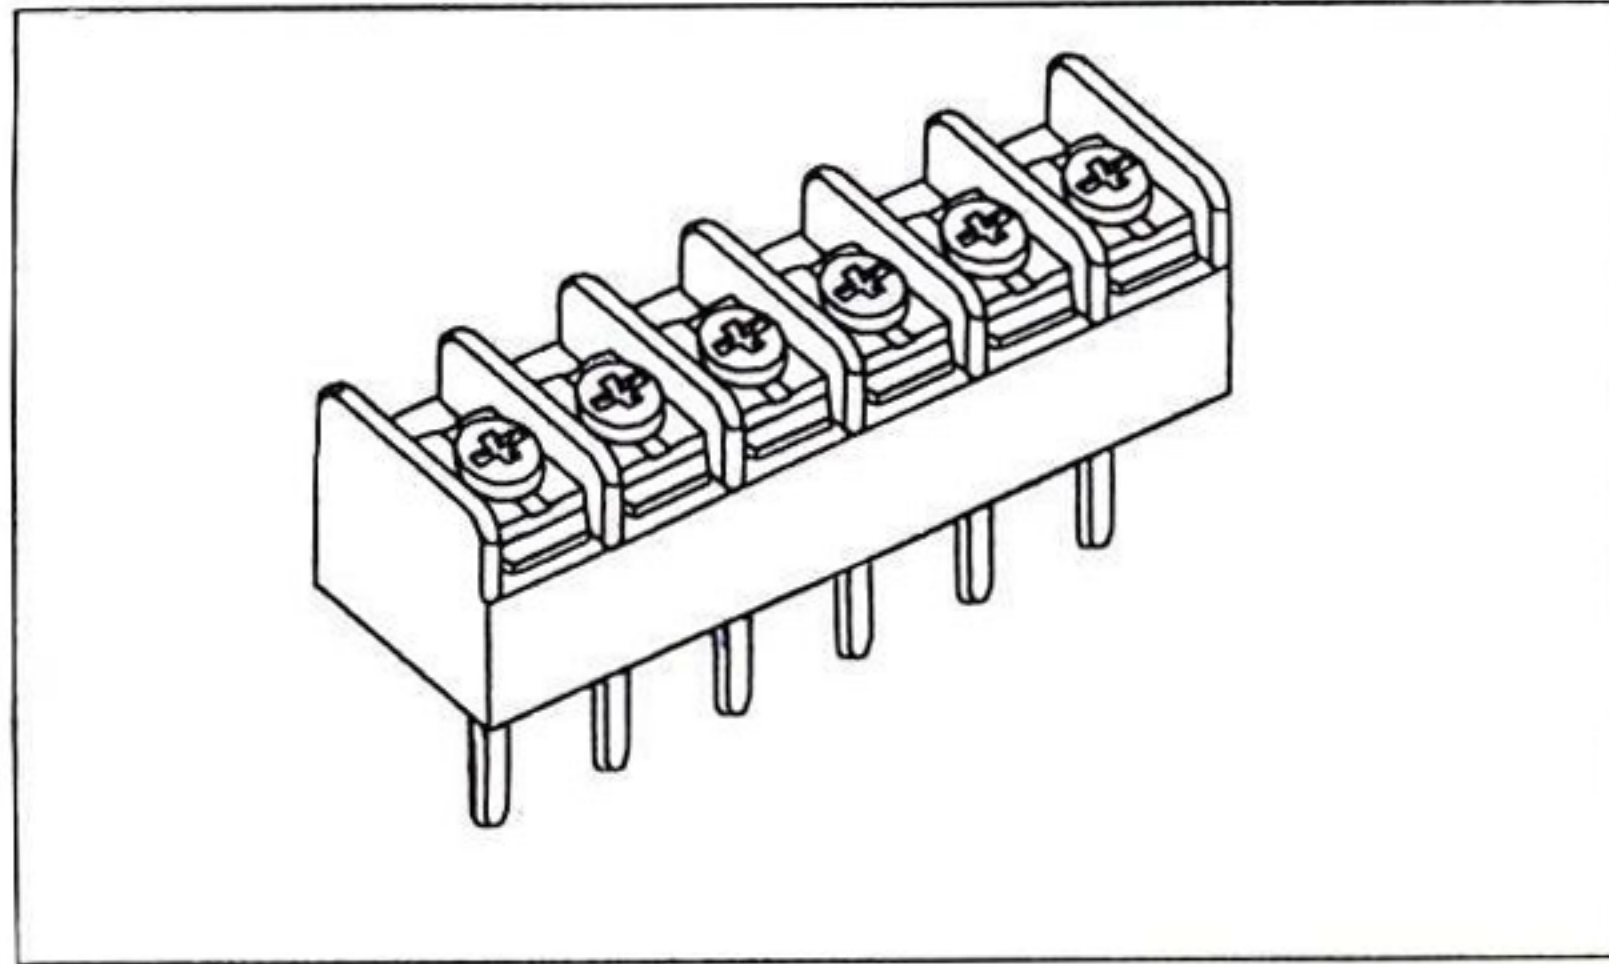

STGGB-10-04

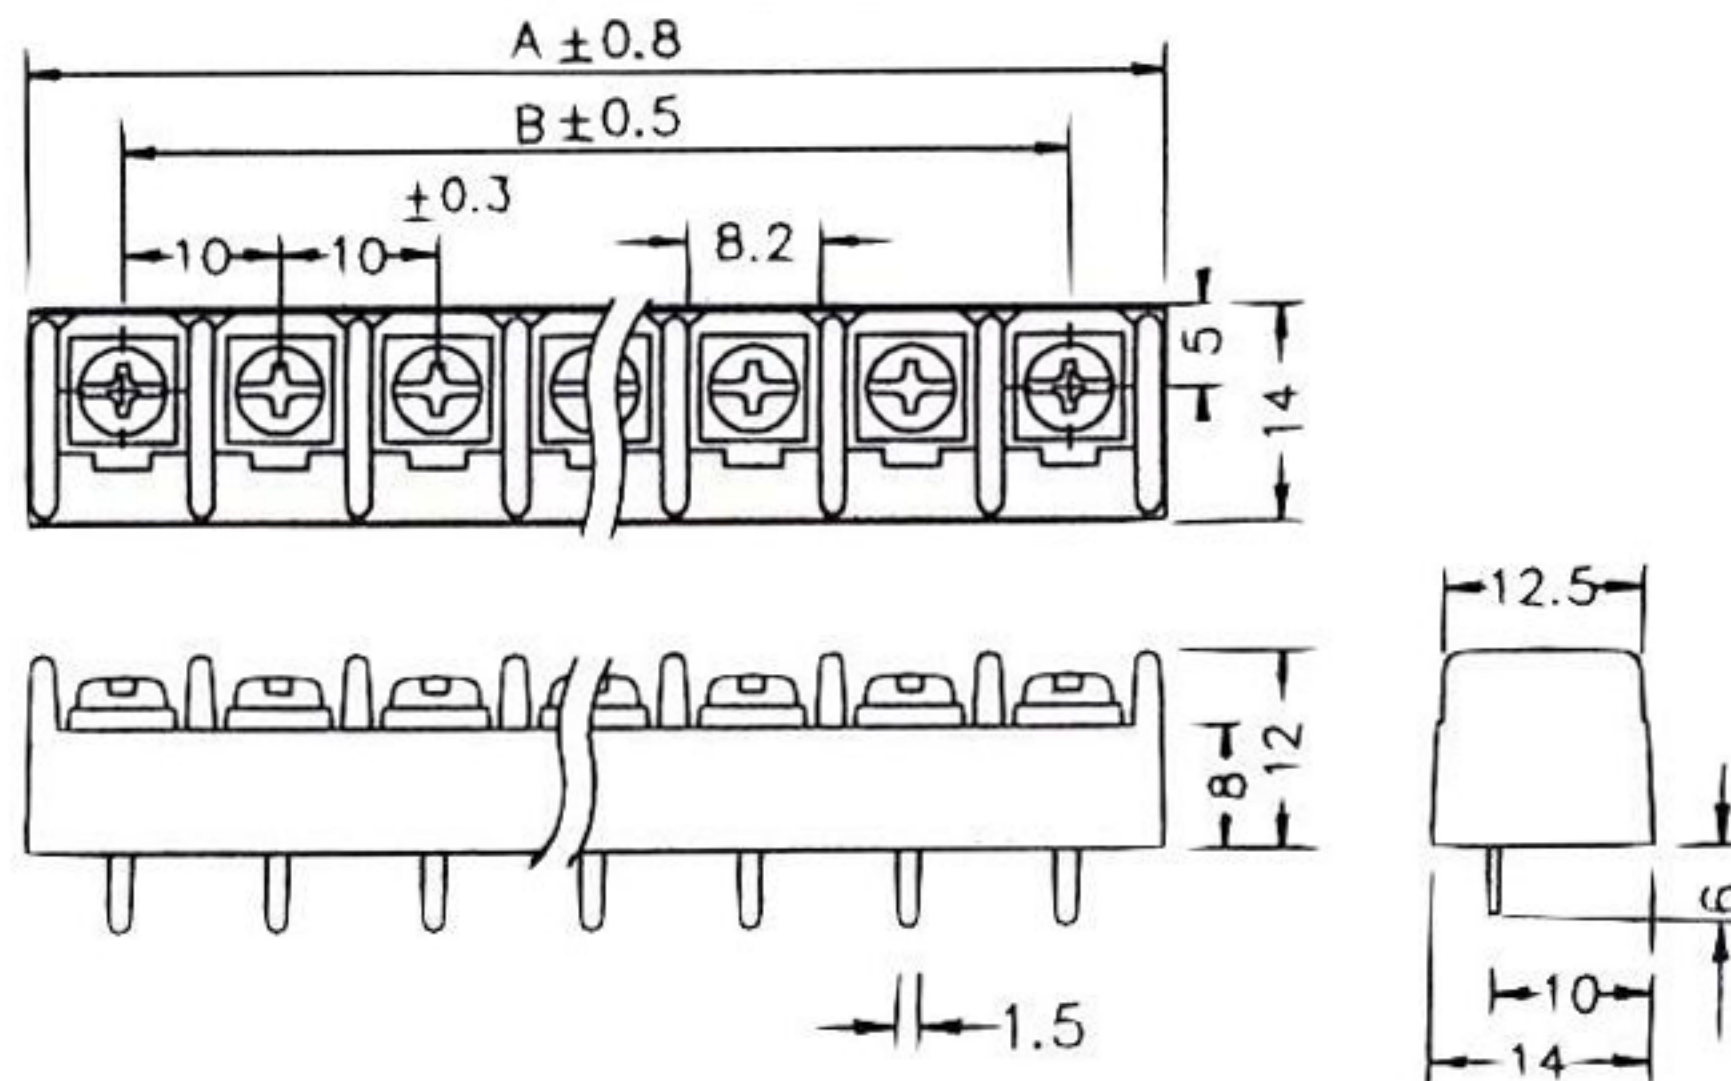

DIMENSION:mm PITCH 10mm

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
$A \pm 0.8$	22	32	42	52	62	72	82	92	102	112	122	132	142	152	162
$B \pm 0.5$	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150

POLE	17	18	19	20	21	22	23	24	25	26	27	28
$A \pm 0.8$	172	182	192	202	212	222	232	242	252	262	272	282
$B \pm 0.5$	160	170	180	190	200	210	220	230	240	250	260	270

NUMBER OF POLE 02~ 28

SPECIFICATIONS

Rated: 15A 300VAC
 Insulation Withstands Voltage: AC 2000V/min
 Insulation Resistance: 1000M Ω or More at DC500V
 Using Temperature Range: -40 $^{\circ}$ C ~ +120 $^{\circ}$ C
 Screw Torque Value: 10 Kg-cm
 Wire Range Awg: 14 - 22 STR
 Insulator Body : Plastic NYLON 66 (UL 94V-0)
 Terminals: Brass, Tin Plated 0.8t
 Terminal Screws: M3.0 Nickel Plated Brass