



ITEM NO. STGGB-30 SERIES PITCH 11mm

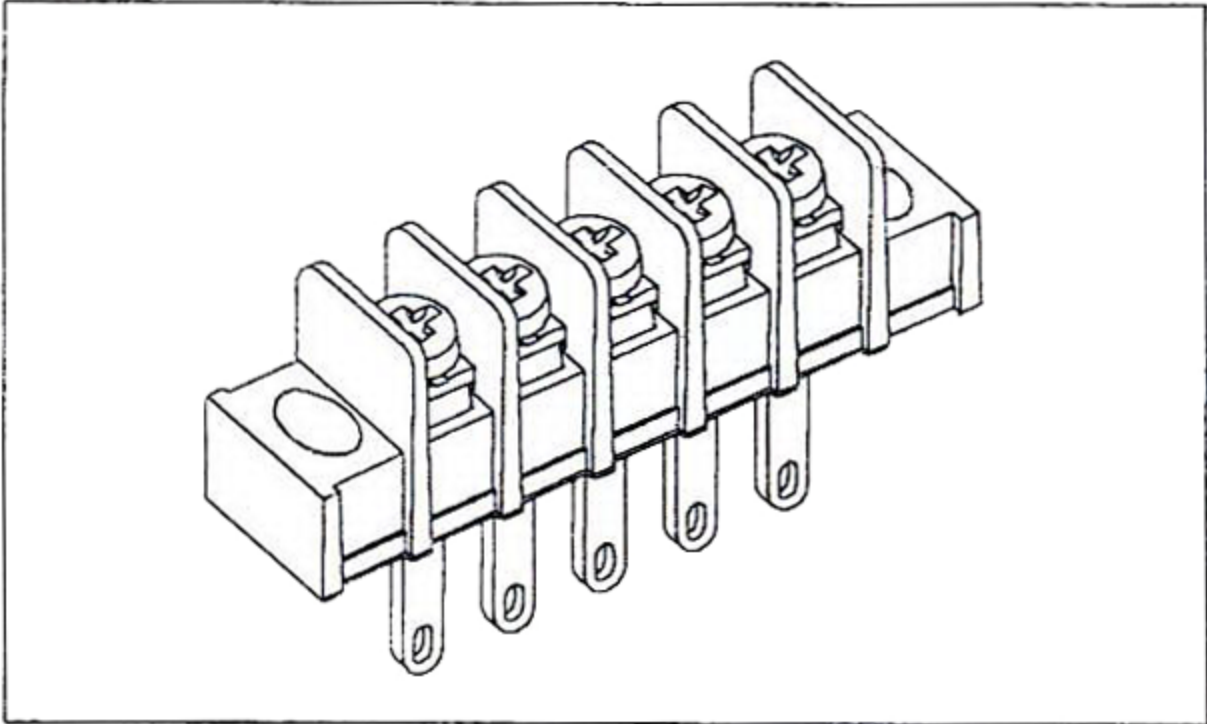

STGGB-30-02

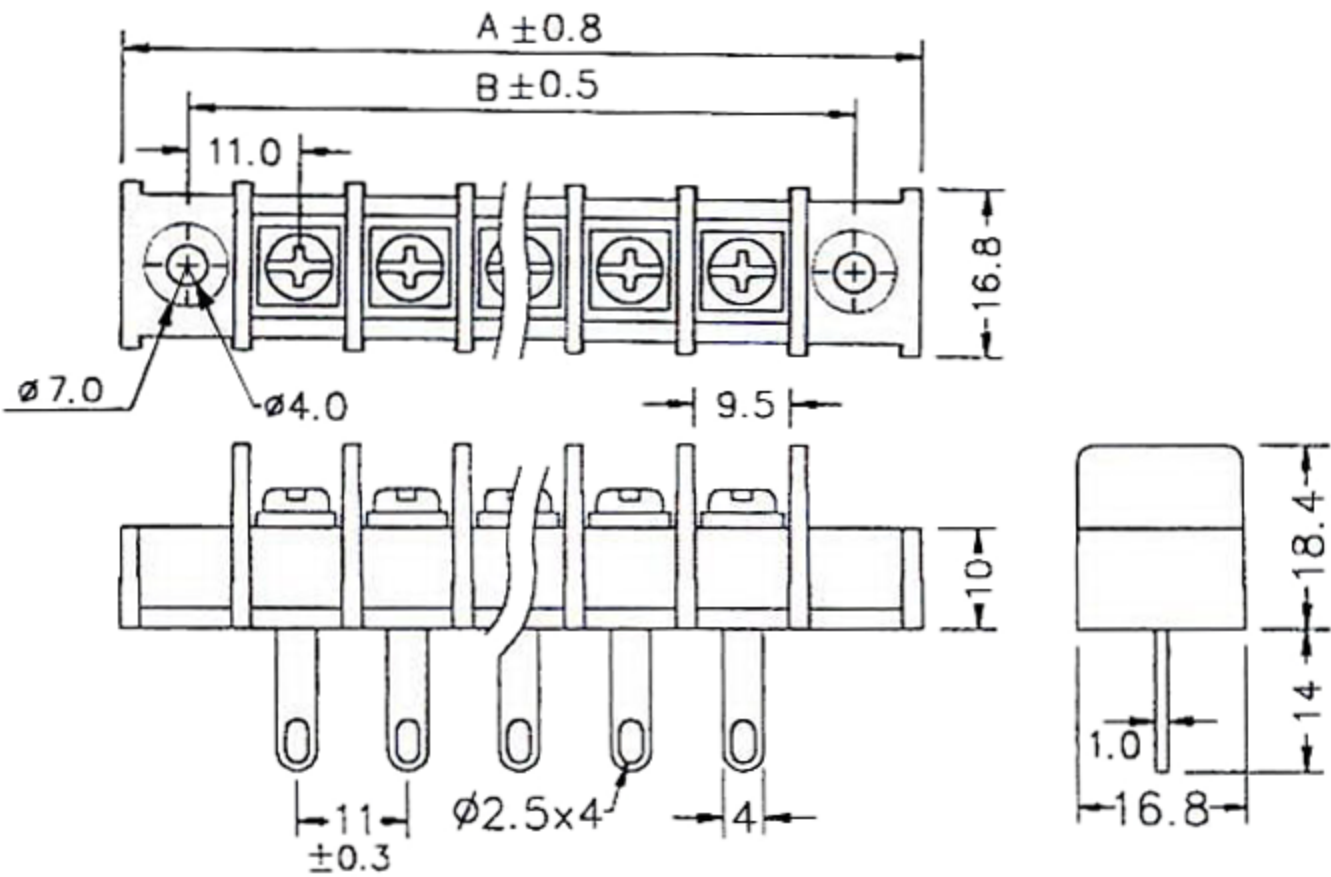

DIMENSION: mm PITCH 11mm

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A ± 0.8	46	57	68	79	90	102	112	124	135	146	157	168	179	190
B ± 0.5	33	44	55	66	77	88	99	110	121	132	143	154	165	176

POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29
A ± 0.8	201	212	223	234	246	257	268	279	290	301	312	323	334	345
B ± 0.5	187	198	209	220	231	242	253	264	275	286	297	308	319	330

NUMBER OF POLE 02 ~ 29

SPECIFICATIONS

- Rated: 30 A 300VAC
- Insulation Withstands Voltage: AC 2000V/min
- Insulation Resistance: 1000M Ω or More at DC500V
- Using Temperature Range: -40 $^{\circ}$ C ~ +120 $^{\circ}$ C
- Screw Torque Value: 18 Kg-cm
- Wire Range Awg: 14 - 22 STR
- Insulator Body : Plastic NYLON 66
- Terminals: Brass, Tin Plated 1.0t
- Terminal Screws: M4 Nickel Plated Steel