



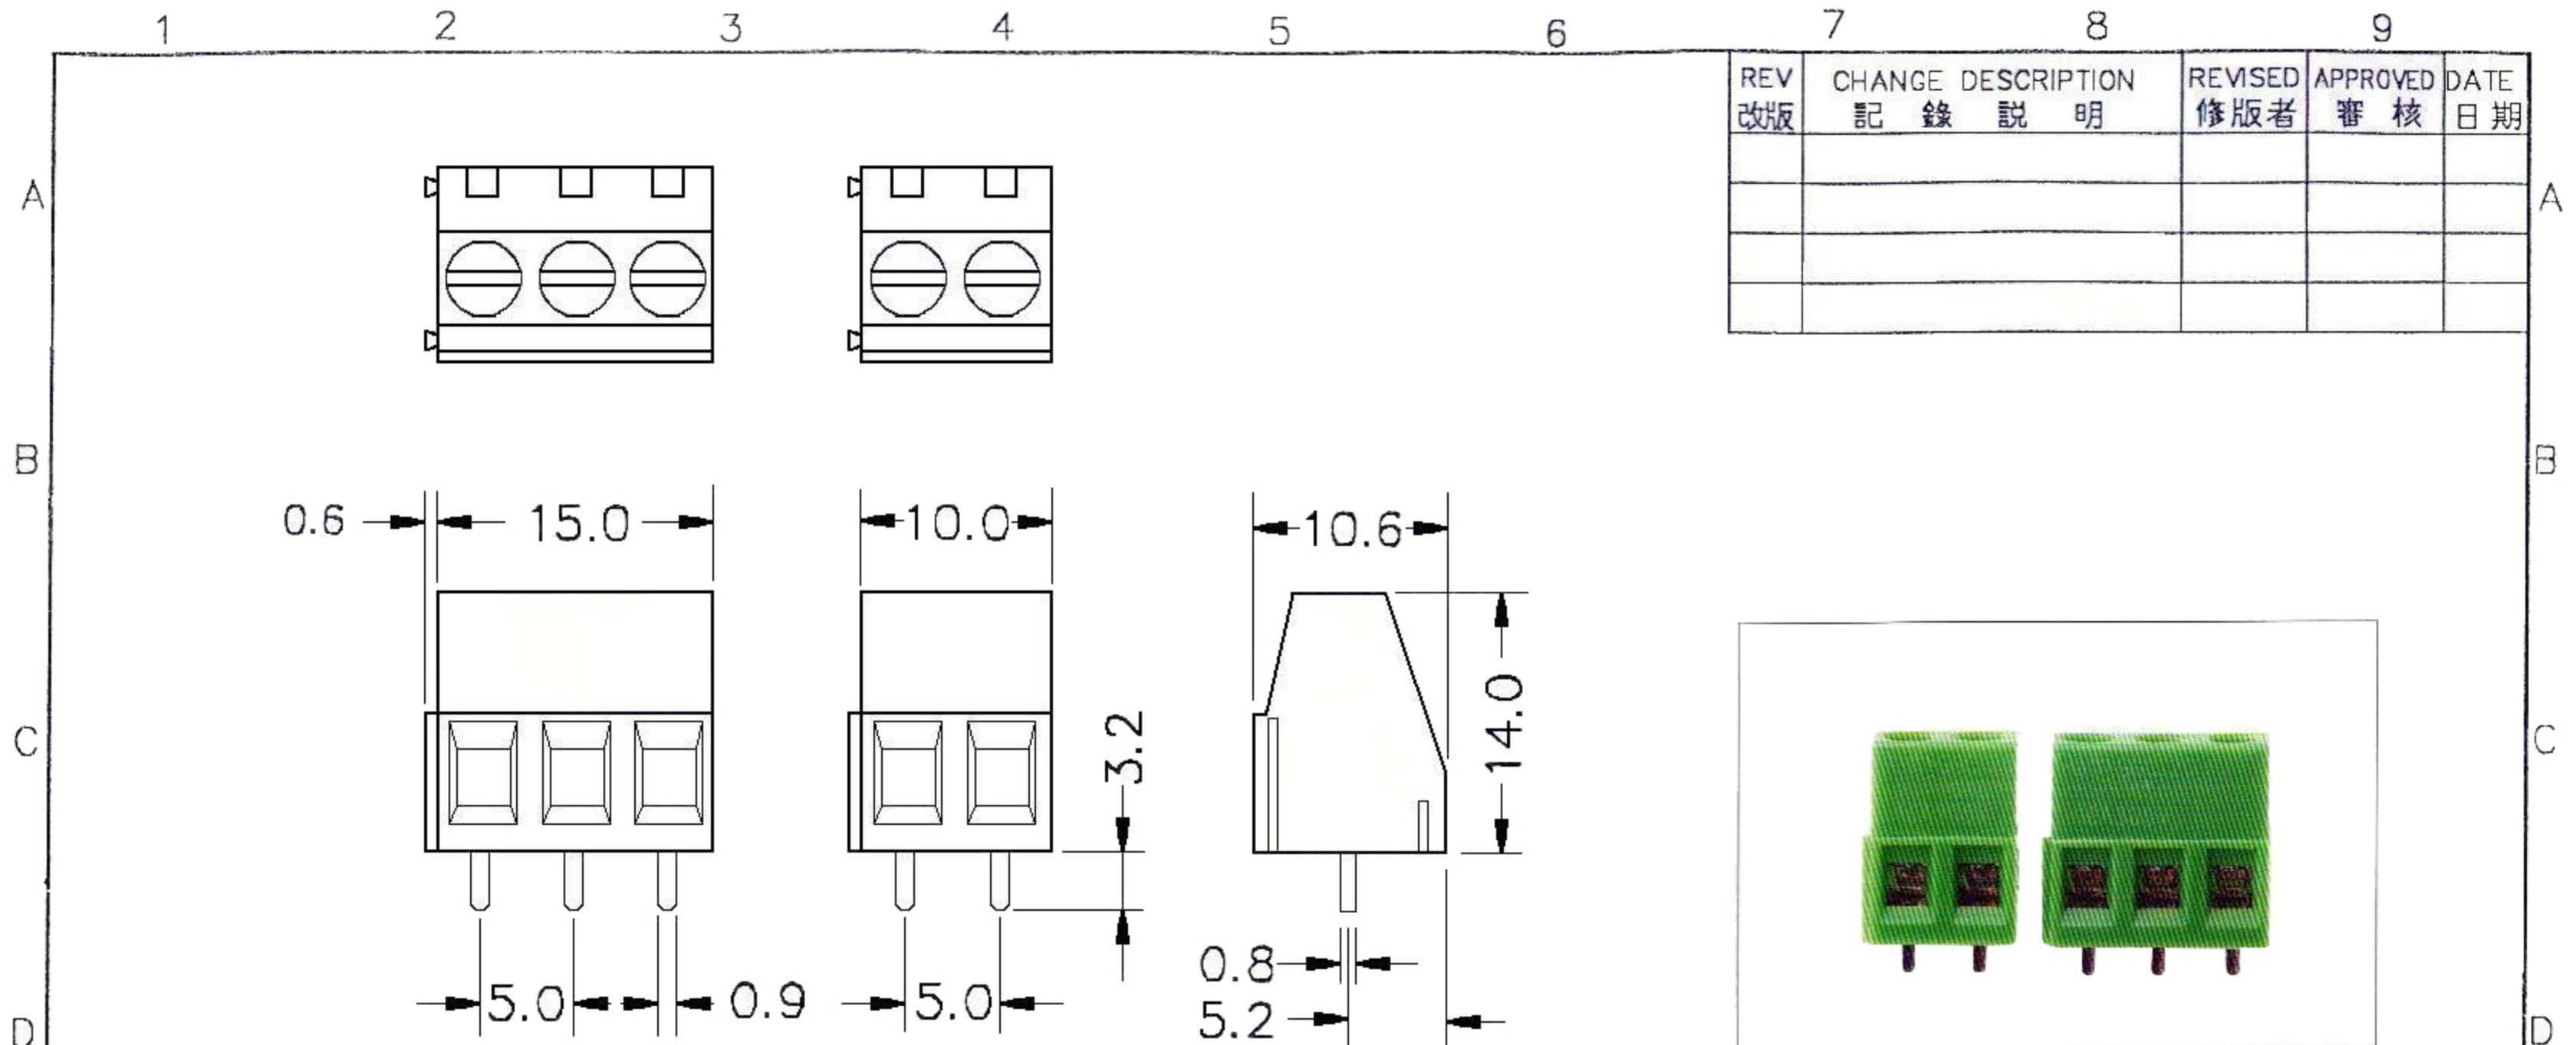

REV 改版	CHANGE DESCRIPTION 記錄說明	REVISED 修版者	APPROVED 審核	DATE 日期

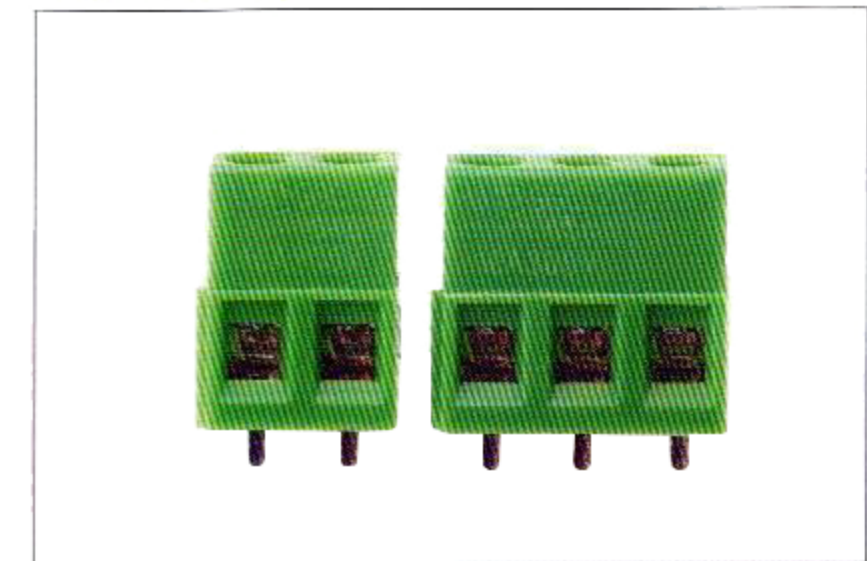

SPECIFICATIONS

Rated: 10A 300VAC
 Insulation Withstands Voltage: AC 2000V/min
 Insulation Resistance: 500MΩ or More at DC500V
 Using Temperature Range: -22°C~+120°C
 Screw Torque Value: 5 Kg-cm
 Wire Range Awg: 16 - 22 STR
 Insulator Body : Plastic NYLON 66
 Terminals: Brass, Tin Plated 0.6t
 Terminal Screws: M2.5 Nickel Plated Steel

UNIT 單位	SCALE 比例	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION		
MM	/	MAT'L 材料:	TITLE	
TOLERANCE 公差		FINISH 處理:	STGGC-20-01	
ANGLE 角度	°	DESIGN 設計:		
		APPR 核准:	PART NO 料號:	REV 版次
			DRAW NO 圖號: G4002	A