
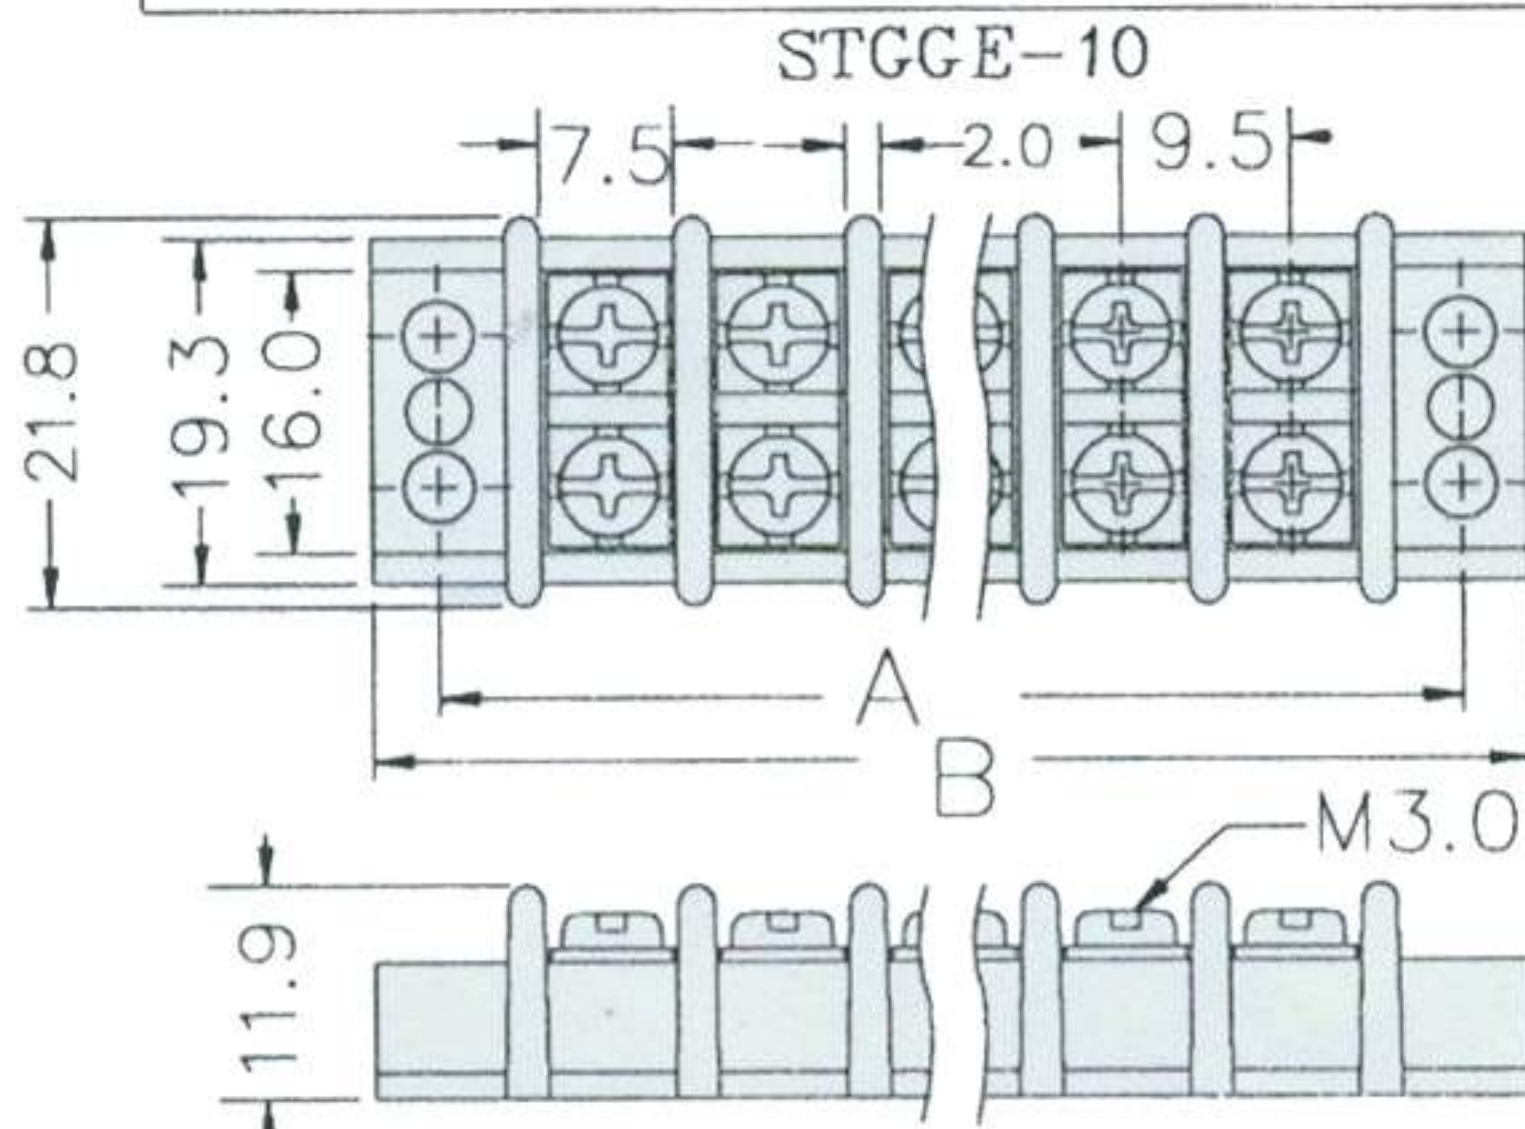


ITEM NO. STGGE-10 SERIES PITCH 9.5mm

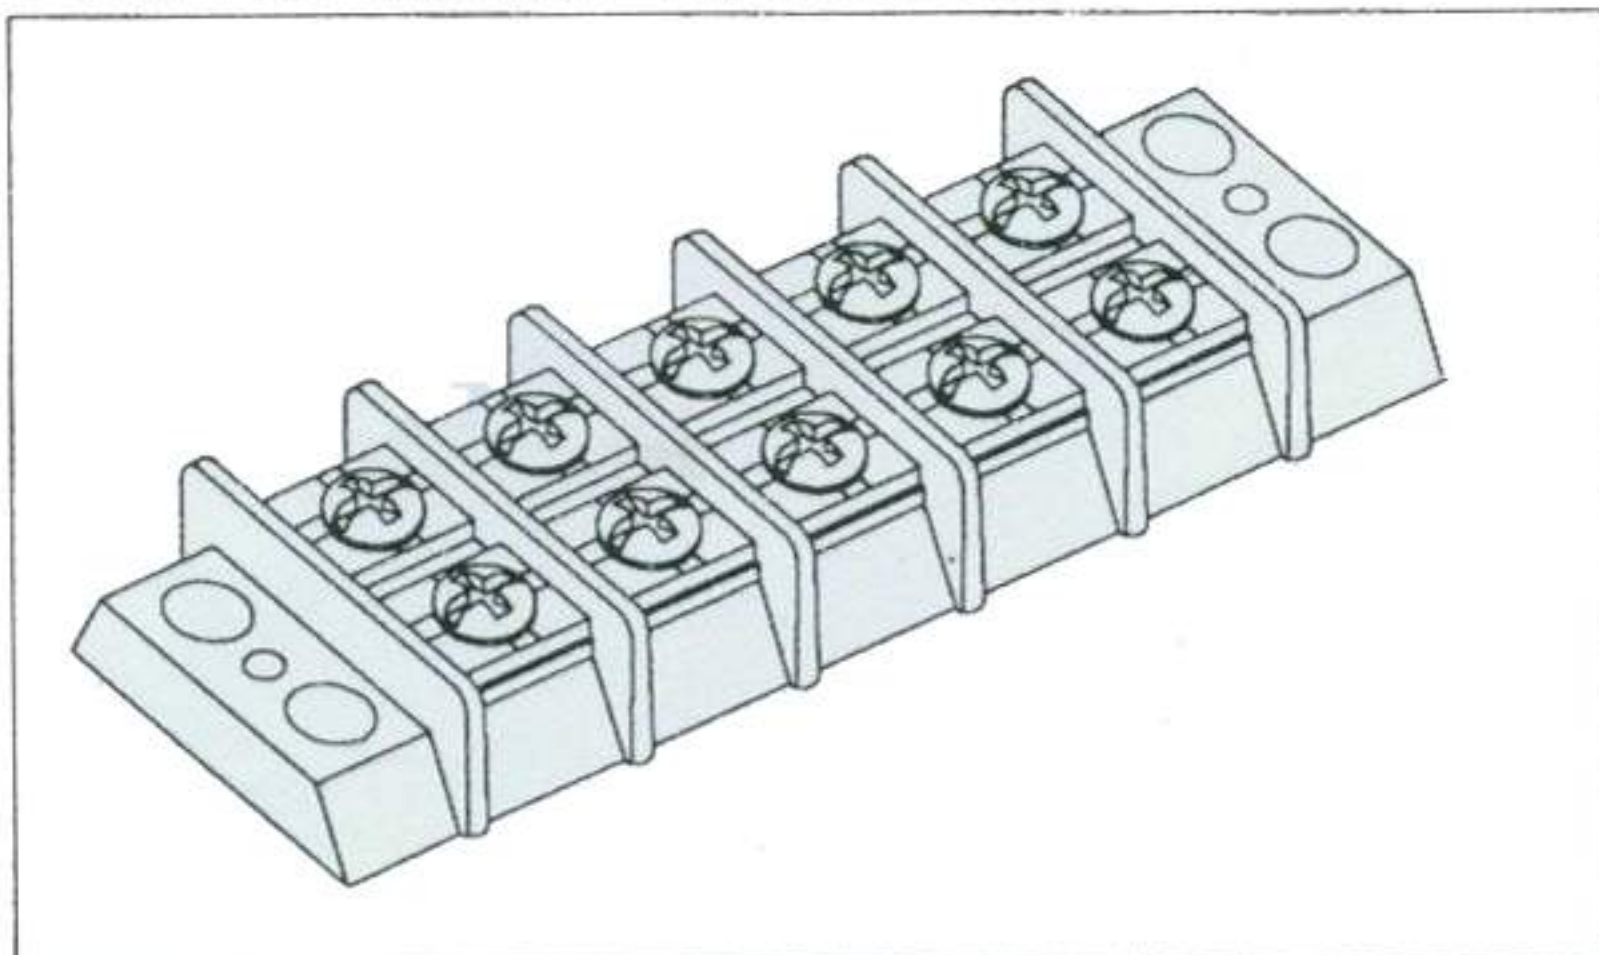

DIMENSION : ± 0.8 PITCH 9.5mm

P數	1	2	3	4	5	6	7	8	9	10	11	12	13	14
A	19	28.5	38	47.5	57	64.5	76	85.5	95	104.5	114	123.5	133	142.5
B	26.5	36	45.5	55	64.5	74	83.5	93	102.5	112	121.5	131	140.5	150

P數	15	16	17	18	19	20	21	22	23	24	25	26	27	28
A	152	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5	266	275.5
B	159.5	169	178.5	188	197.5	207	216.5	226	235.5	245	254.5	264	273.5	283

SPECIFICATIONS

SPECIFICATIONS

Rated: 10A 300VAC
 Insulation Withstands Voltage: AC 2000V/min
 Insulation Resistance: 1000M Ω or More at DC500V
 Using Temperature Range: $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$
 Screw Torque Value: 10 Kg-cm
 Wire Range Awg: 14 - 18 STR
 Insulator Body : Plastic NYLON 66 (UL 94V-0)
 Terminals: Brass, Tin Plated 0.8t
 Terminal Screws: M3 Nickel Plated Brass