
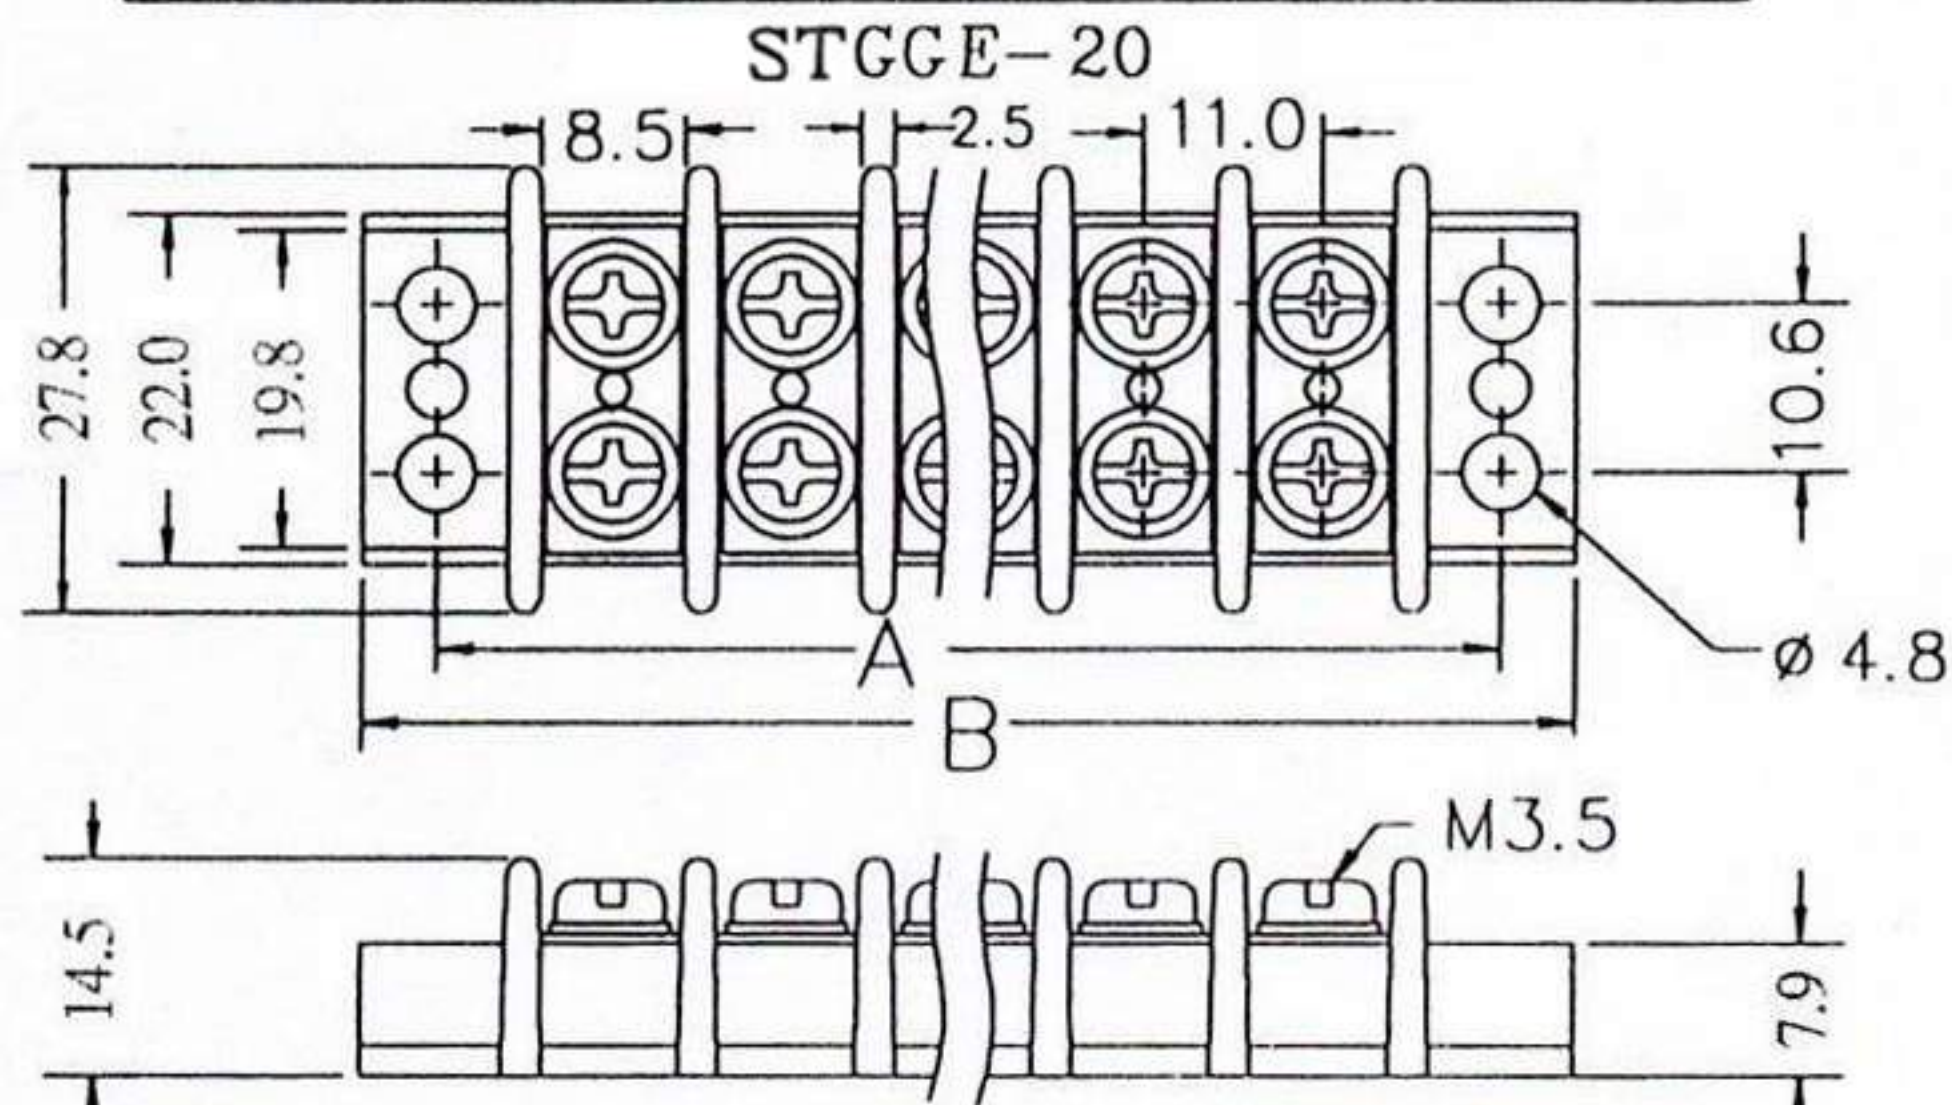


ITEM NO. STGGE-20 SERIES PITCH 11.0 mm

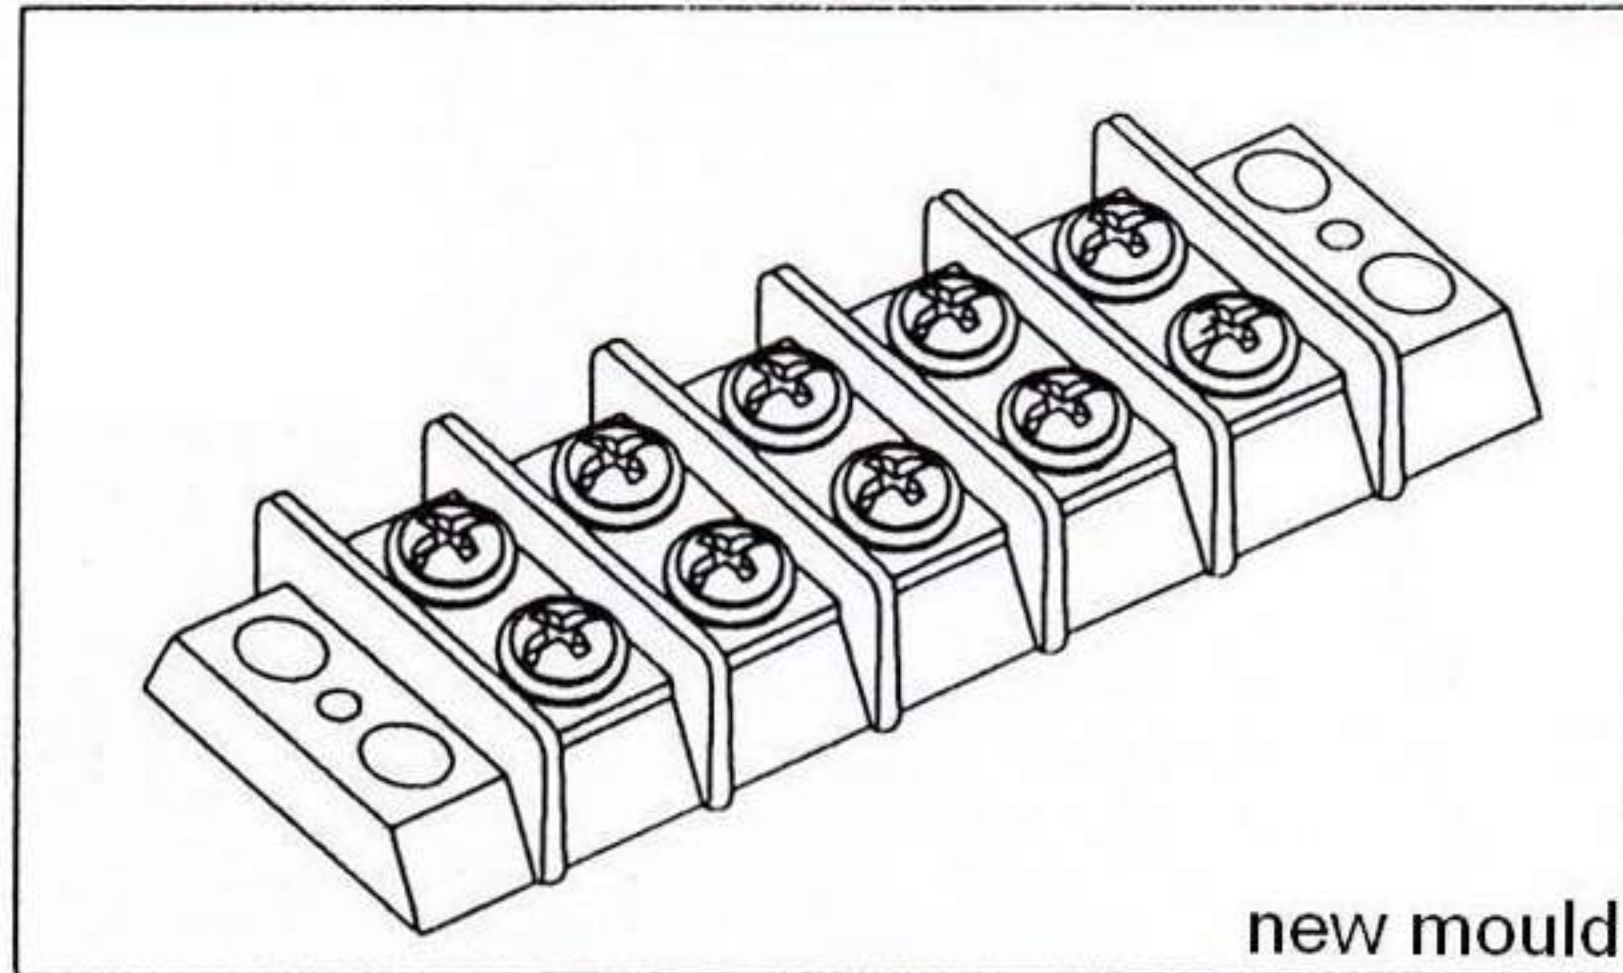

DIMENSION :  $\pm 0.8$  PITCH 11.0 mm

| P 數 | 2  | 3  | 4  | 5  | 6  | 7  | 8   | 9   | 10  | 11  | 12  | 13  | 14  |
|-----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|
| A   | 33 | 44 | 55 | 66 | 77 | 88 | 99  | 110 | 121 | 132 | 143 | 154 | 165 |
| B   | 41 | 52 | 63 | 74 | 85 | 96 | 107 | 118 | 129 | 140 | 151 | 162 | 173 |

| P 數 | 15  | 16  | 17  | 18  | 19  | 20  | 21  | 22  | 23  | 24  | 25  | 26  |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| A   | 176 | 187 | 198 | 209 | 220 | 231 | 242 | 253 | 264 | 275 | 286 | 297 |
| B   | 184 | 195 | 206 | 217 | 228 | 239 | 250 | 261 | 272 | 283 | 294 | 305 |

#### SPECIFICATIONS

##### SPECIFICATIONS

Rated: 20A 300VAC  
 Insulation Withstands Voltage: AC 2000V/min  
 Insulation Resistance: 1000M $\Omega$  or More at DC500V  
 Using Temperature Range:  $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$   
 Screw Torque Value: 12 Kg-cm  
 Wire Range Awg: 12 - 18 STR  
 Insulator Body : Plastic NYLON 66 (UL 94V-0)  
 Terminals: Brass, Tin Plated 0.8t  
 Terminal Screws: M3.5 Nickel Plated Brass