


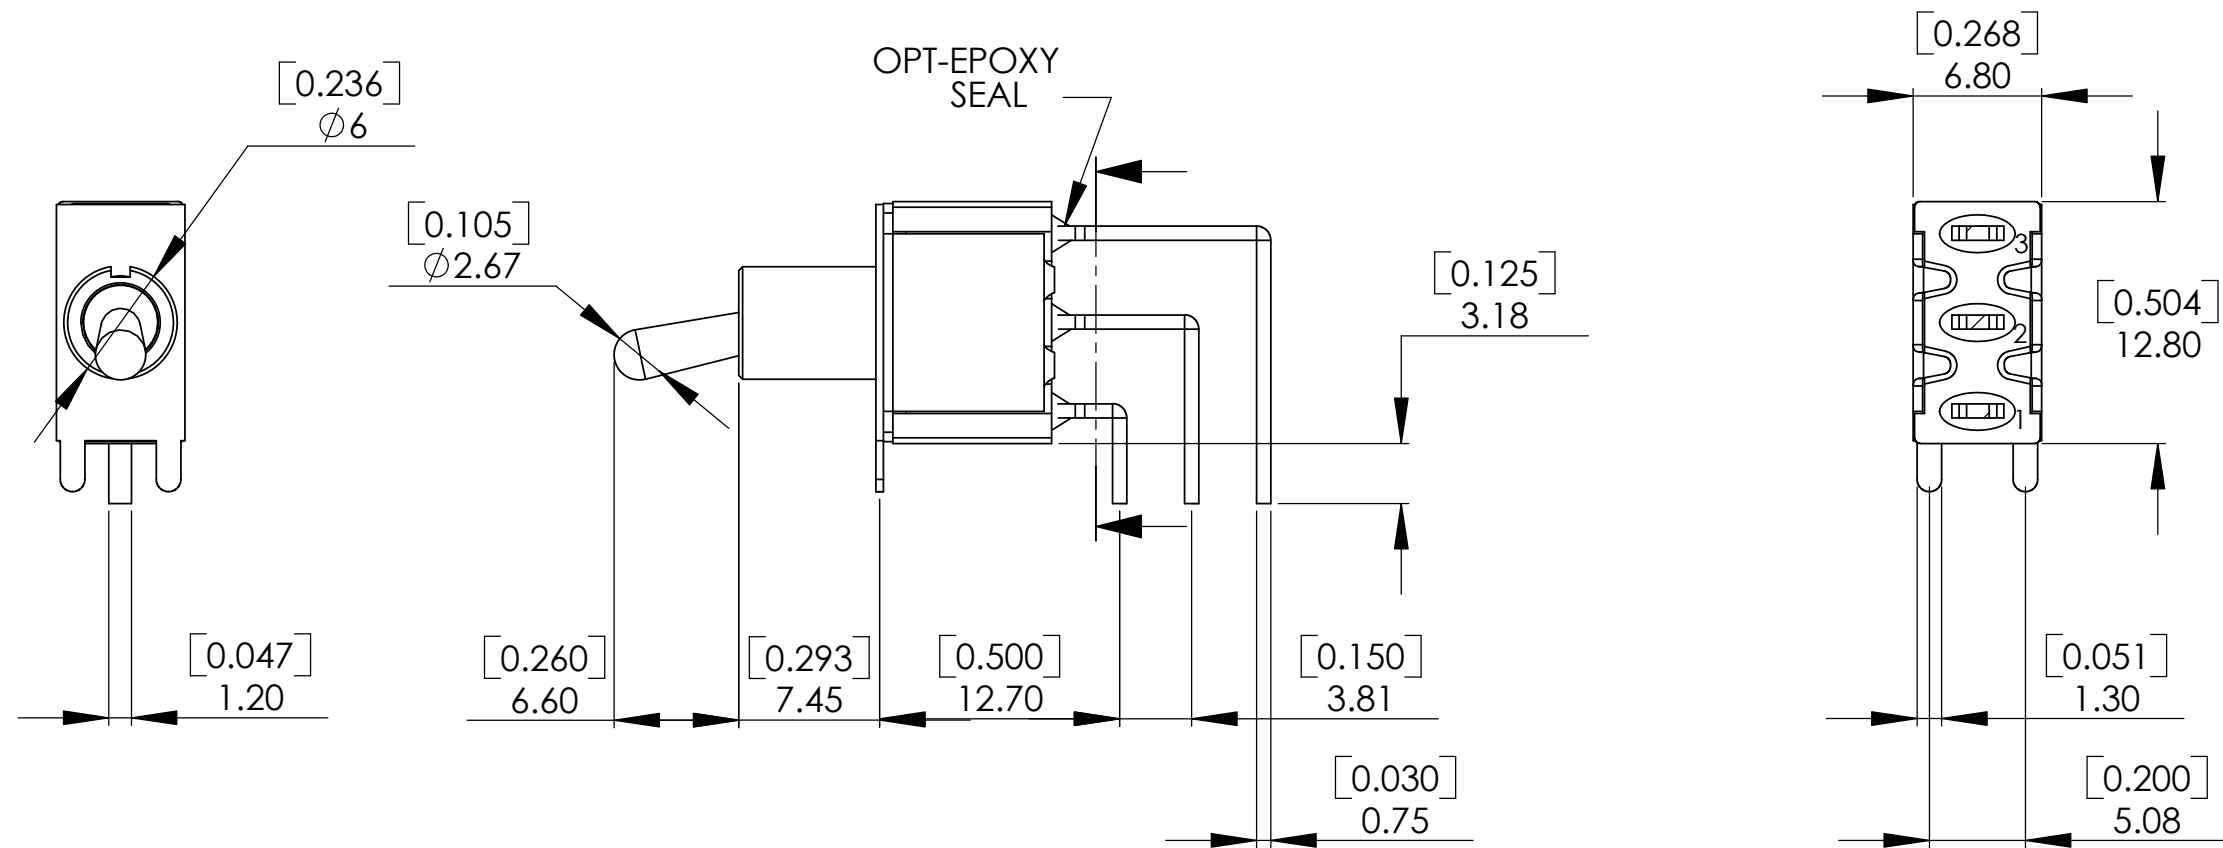


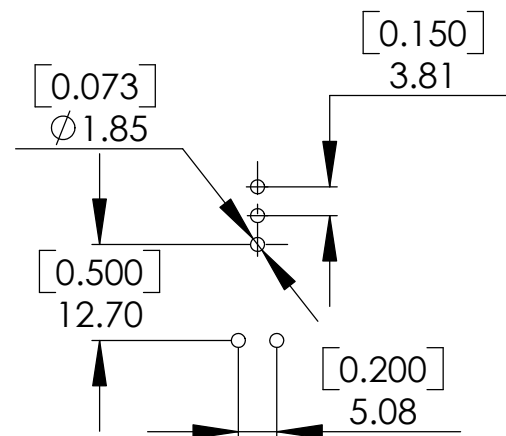

P.C. MOUNTING

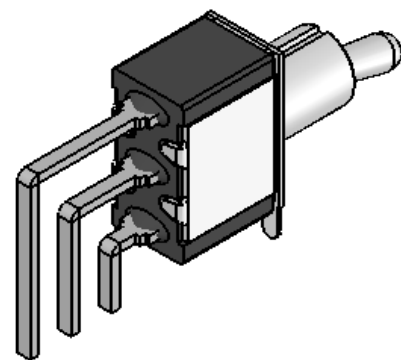

Schematic



Model No.	Switching Position		
	ON	NONE	ON
SL101	ON	NONE	ON
SL102	ON	NONE	(ON)
SL103	ON	OFF	ON
SL104	(ON)	OFF	(ON)
SL105	ON	OFF	(ON)
Term Comm.	2-3	OPEN	2-1

SPECIFICATIONS:

CONTACT RATING : 5 AMPS @ 120 V AC or 28 V DC.
 2 AMPS @ 250 V AC or 0.4VA AMPS @20 V AC or DC.
 ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 ACTUATOR : ZINC ALLOY.
 BUSHING : ZINC ALLOY.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver.
 SWITCH SUPPORT : Brass, tin plated.

喜威達企業股份有限公司
 SWEETA PRODUCTS CORPORATION

TOLERANCE
 XX. ± 0.5
 X. ± 0.2

ITEM NO		DATA		.X ± 0.2
CHECKED BY		DRAWN BY		.XX ± 0.2