
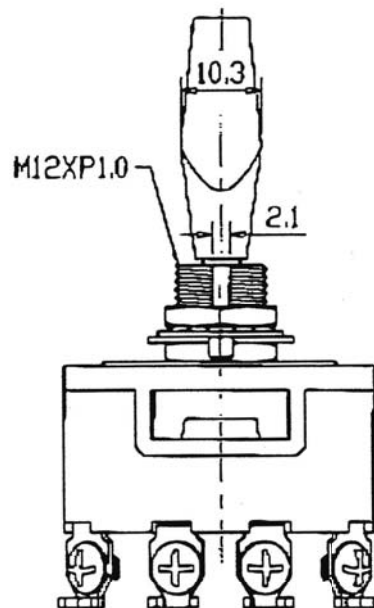


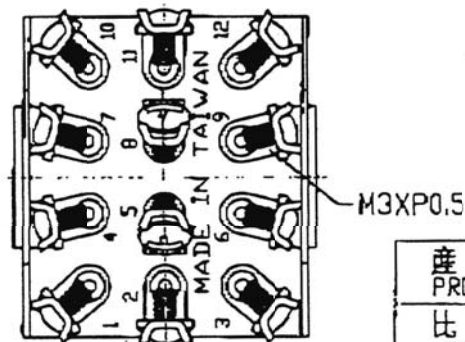

MODEL NO.	SWITCH FUNCTION			TERMINAL QUANTITY	CONNECTED TERMINALS		
	POS.1	POS.1	POS.1		POS.1	POS.1	POS.1
							
SPL709-1	ON	NONE	ON	12P	1-2,4-5 7-8,10-11	—	2-3,5-6 8-9,11-12
SPL709-1A	(ON)	NONE	ON	12P	1-2,4-5 7-8,10-11	—	2-3,5-6 8-9,11-12
SPL709-2	ON	OFF	ON	12P	1-2,4-5 7-8,10-11	—	2-3,5-6 8-9,11-12
SPL709-2A	MOM	OFF	ON	12P	1-2,4-5 7-8,10-11	—	2-3,5-6 8-9,11-12
SPL709-2B	MOM	OFF	MOM	12P	1-2,4-5 7-8,10-11	—	2-3,5-6 8-9,11-12

MOM=MOMENTARY

SPECIFICATION

1.PATING:10A	250VAC,15A	125VAC
15A	250VAC,20A	125VAC

2.INSULATION RESISTANCE:DC 500V 200MΩ OR MORE

3. CONTACT RESISTANCE: DC 2-4V 1A 20MΩ OR LESS

4. WITHSTAND VOLTAGE: AC 1500V OR MORE

端子種類 Termination Options

H1	H2	H3	H4	H5

產 品 PRODUCT	POWER TOGGLE SWITCH					喜威達企業股份有限公司
比 例 SCALE	1:1	單 位 UNIT	MM	公 差 TOLERANCE	±0.3MM	SWEETA PRODUCTS CORPORATION