


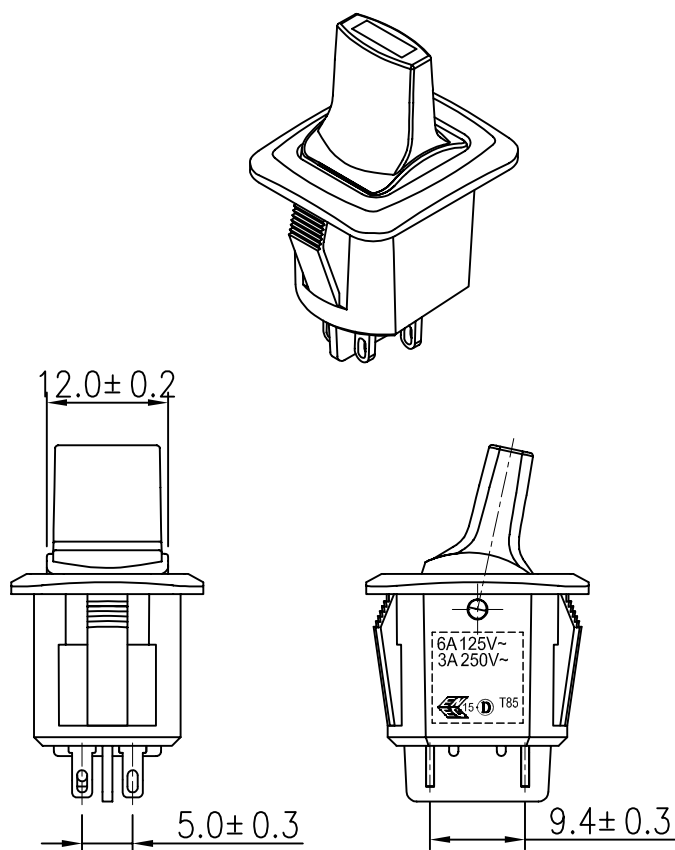



Rating	6A 125V AC 3A 250V AC		Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.			 LED Rating Green: @20mA, If=2.1VDC
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1000V 1 minute			
Operation Temperature	-25°C~85°C			
Switch Function	4P SPST ON-OFF With LED			

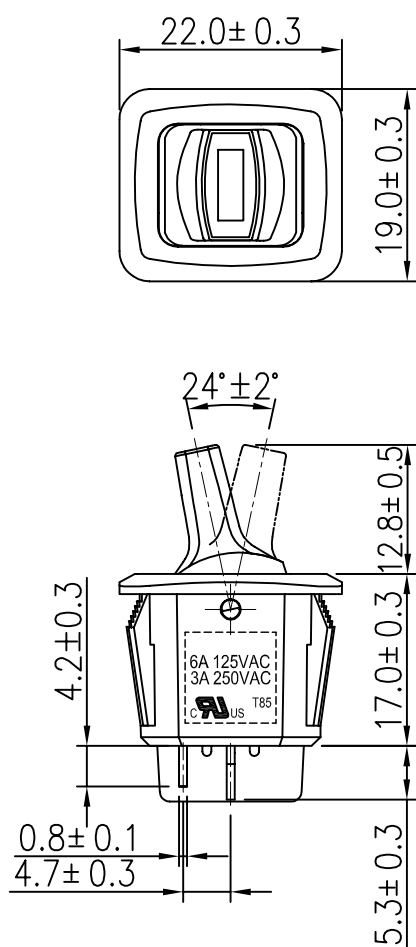

***MATERIAL:**

Frame: Black, Nylon 66 (94-V2)

Actuator: Black, Nylon 66 (94-V2)

Terminals: Silver plated, Copper alloy

LED: Green

								△
								△
Date	Name			Description				NO
Drawn	Checked	Approved	SCI BOM NO.	1812511	Model Name	Rocker Switch		
曹盈芳	蘇崇仁	王佰山	Customer No.		Model No.	SR13-290AL3-05-BBG	Rev.	
06/09/'11	06/09/'11	06/09/'11	Unit	mm	SWEETA PRODUCTS CORPORATION			0