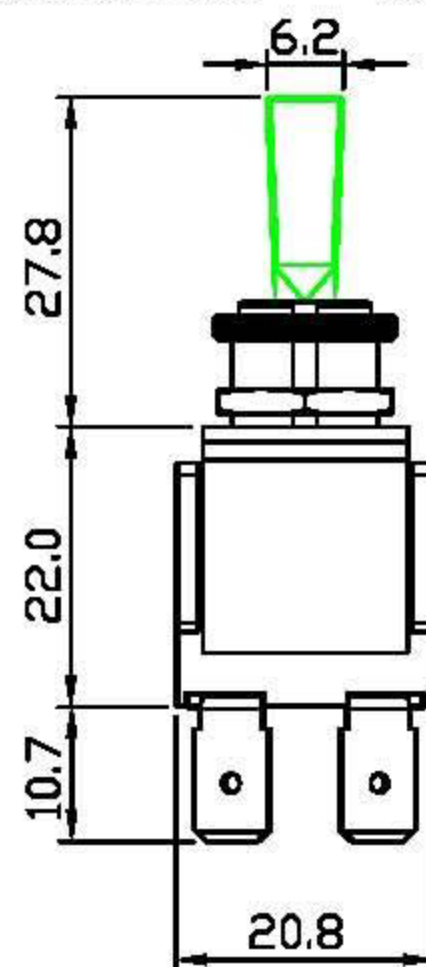
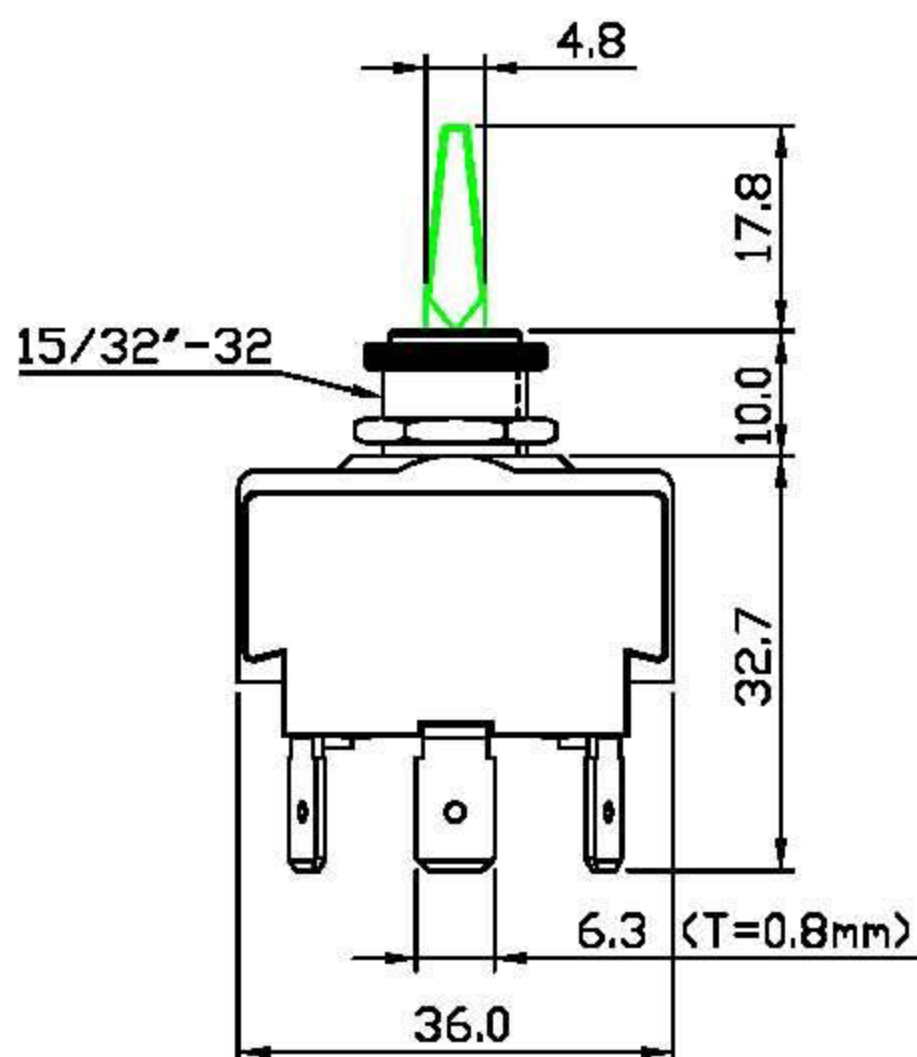
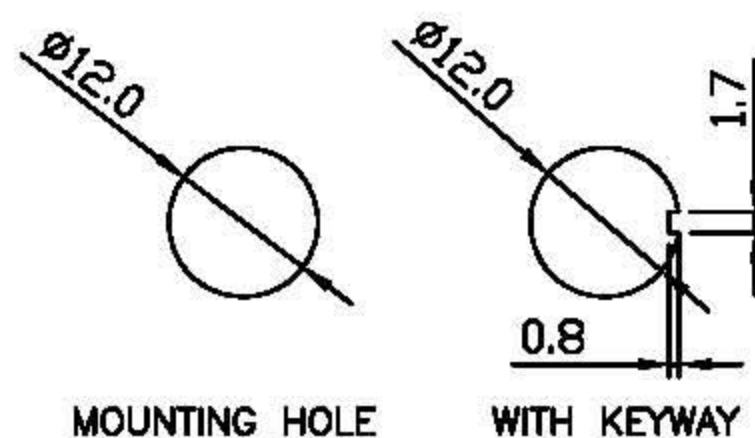
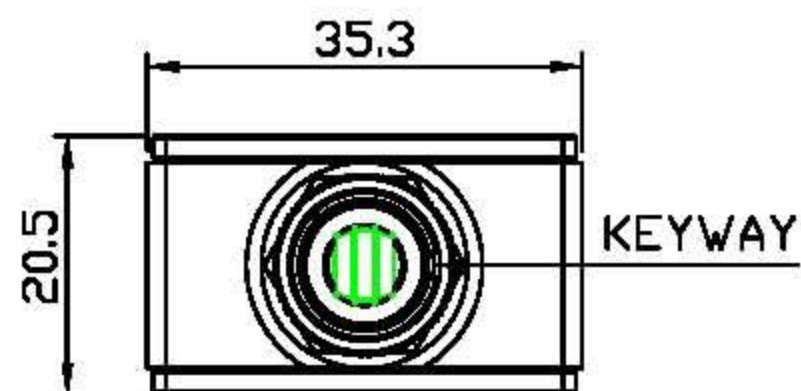


Specification :

Contact resistance: 20mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500V DC)


Dielectric strength: 1,500V AC 50/60 Hz for 1 minute

Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating: 15A 12V DC / 10A 24V DC

Circuit: ON - OFF - ON SPST (Illuminated)
Keyway Pos.

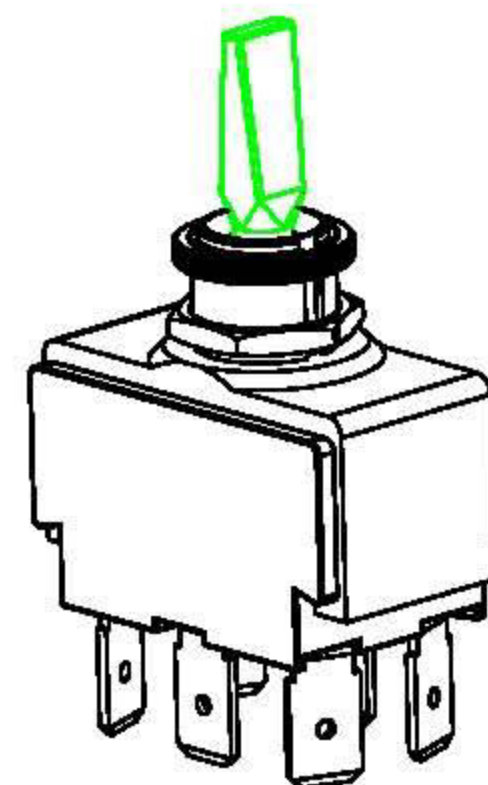

<u>TOLERANCES</u> X. ± 0.3 X.X ± 0.2 X.XX ± 0.1			<u>UNLESS NOTED</u> MIN WALL THICKNESS MAX. DRAFT 2 / SIDE ALL RADII	
DATE:	DRAWN:	PROJ:	EX.NO.	
5-28-2010	C. H. SHIU	W.D. CHEN		
NAME Illuminated Toggle Switch (with seal)				
UNIT	SCALE	PROD. NO	REV.	
☒ m/m ☐ inch	1 : 1	SSW-2726-C3-2L	W.H.YEH	

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號 TEL:886-2-2226-8001 FAX:886-2-2226-8002
http://www.sweeta.com.tw E-mail: sweeta.tw@msa.hinet.net

Material :

Finished :