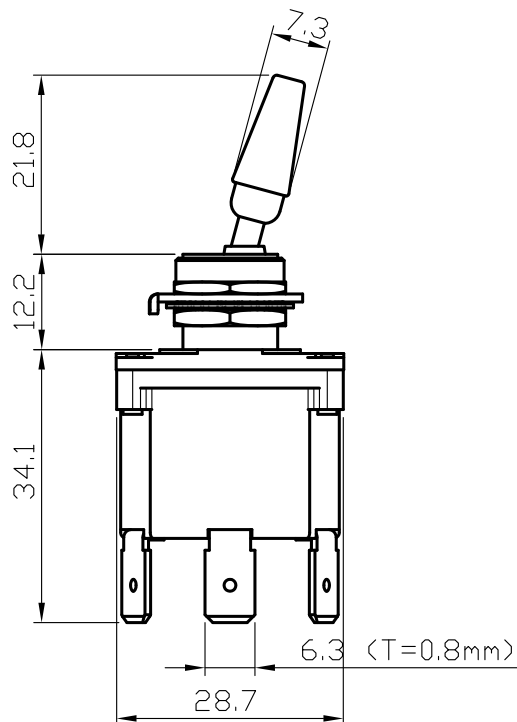
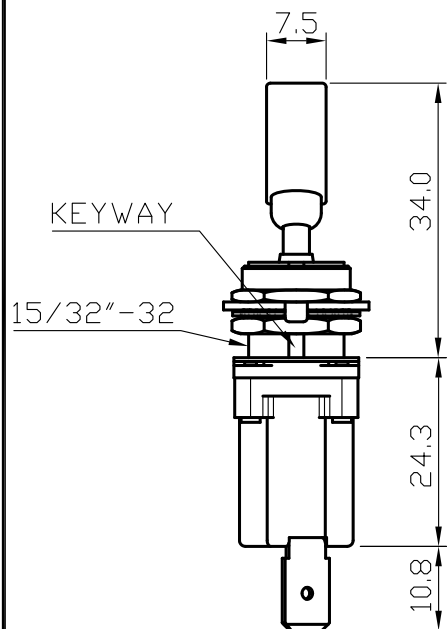
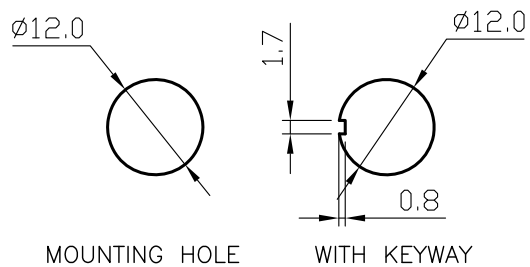


Specification :

Contact resistance: 20mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500V DC)

Dielectric strength: 1,500V AC 50/60 Hz for 1 minute

Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating : 12A 125V AC/ 10A 250V AC

1/2HP 125VAC/ 1HP 250VAC/5A 125VAC 'L'

Circuit:(ON) - ON SPDT

Keyway
Position

TOLERANCES		UNLESS NOTED	
X.	± 0.3	MIN WALL THICKNESS	
X.X	± 0.2	MAX. DRAFT 2 / SIDE	
X.XX	± 0.1	ALL RADII	
DATE:	DRAWN:	PROJ:	EX.NO.
3-23-2009	C.H. Shiu	W.D.Chen	
NAME Sealed Toggle Switch			
UNIT	SCALE	PROD. NO	REV.
■ m/m □ inch	1 : 1	S1TC-P18	W.H.Yeh

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

Material:

Finished: