


S5SE Series

Sub-Miniature Slide Switches(Washable)



SPECIFICATIONS

CONTACT RATING: Max 0.4 VA max @ 48 VAC or DC

MECHANICAL LIFE: minimum 40,000 operations.

CONTACT RESISTANCE: 50 mΩ max.

INSULATION RESISTANCE: 500 MΩ at 250 VDC.

DIELECTRIC STRENGTH: 500V, 50 Hz for the duration of 1 minute.

OPERATING TEMPERATURE: -20°C to 80°C.

DEGREE OF PROTECITON: IP67

MATERIALS

ACTUATOR: PBT,yellow std.

HOUSING/SWITCH SUPPORT: Brass, Ni plated.


CASE: Glass filled nylon 6/6, flame retardant,heat srabilized (UL94v-0)

CONTACT/TERMINALS: Phosphor bronze gold - plated over nickel barrier.

TERMINAL SEAL: Epoxy



HOW TO ORDER

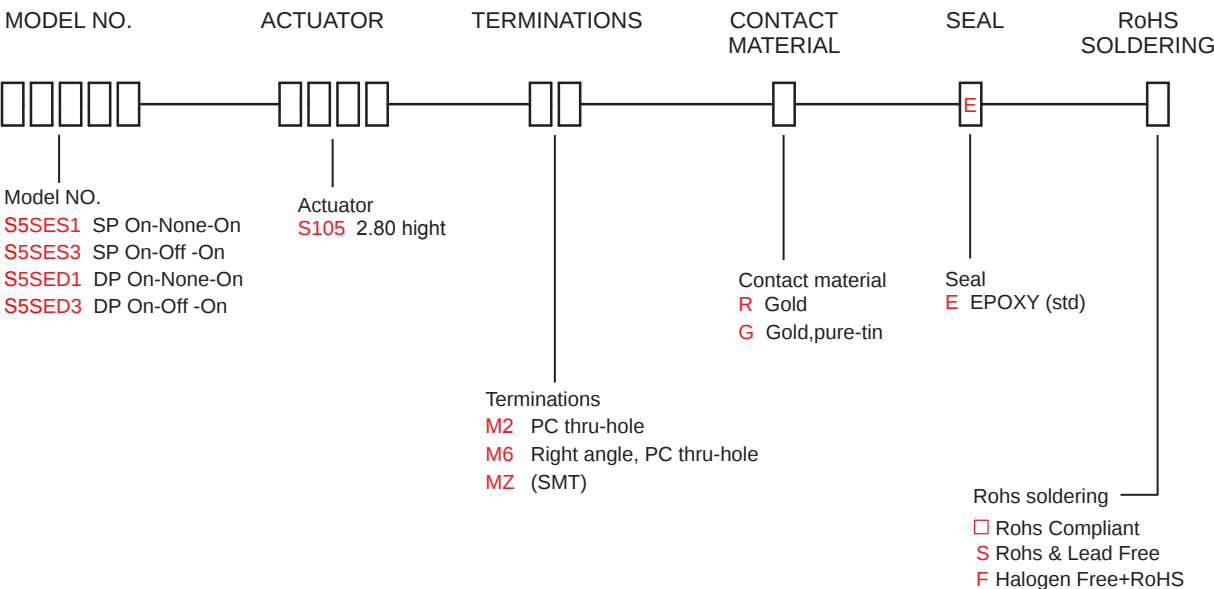


SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
		POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
SP	S5SES1	ON	NONE	ON	2-1	N/A	2-3
	S5SES3	ON	OFF	ON	2 (COMM) 1 2 3	OPEN	2 (COMM) 1 2 3
DP	S5SED1	ON	NONE	ON	2-1,5-4	N/A	2-3,5-6
	S5SED3	ON	OFF	ON	2 (COMM) 5 1 2 3 4 5 6	OPEN	2 (COMM) 5 1 2 3 4 5 6


MOM=MOMENTARY

POLE OPTIONS

M2

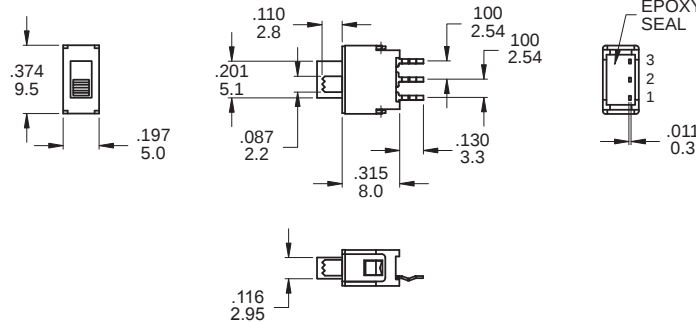


P.C. MOUNTING




SPDT

Part No. Shown : S5SES1S105M2RES

M2

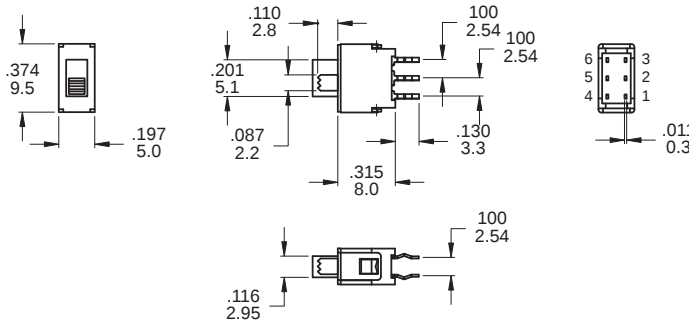

P.C. MOUNTING




DPDT

Part No. Shown : S5SED1S105M2RES


MZ



Actuator & Case:FR52

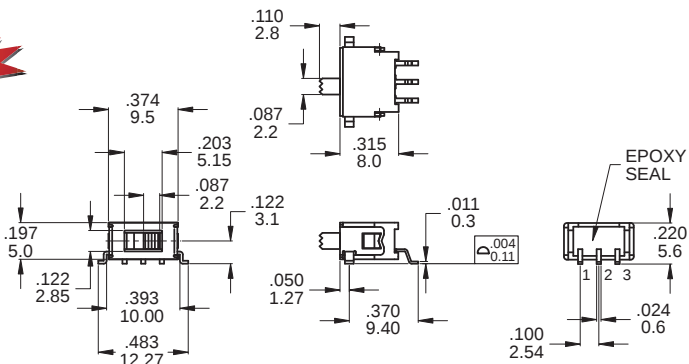


P.C. MOUNTING




SPDT

Part No. Shown : S5SES1S105MZRES-A

M6

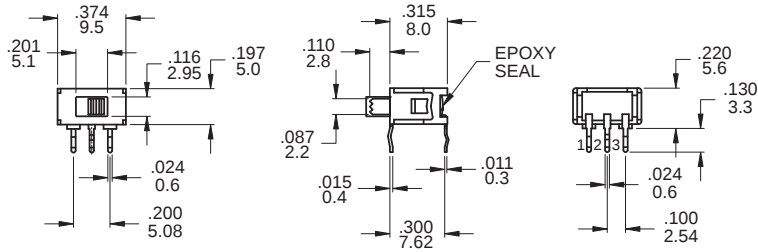


P.C. MOUNTING




SPDT

Part No. Shown : S5SES1S105M6RES

M6

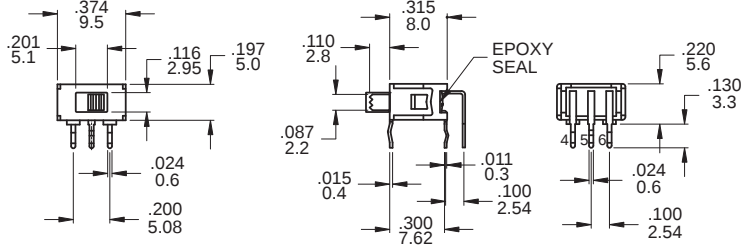

P.C. MOUNTING



DPDT

Part No. Shown : S5SED1S105M6RES

SOLDERING PROCESSES

WAVE SOLDERING: Recommended Soldering Temperature: $260 \pm 5^{\circ}\text{C}$

Duration of Solder Immersion: Max 5 sec. (PCB is 1.6mm in thickness)