



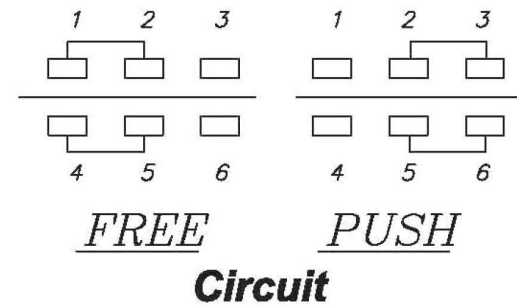
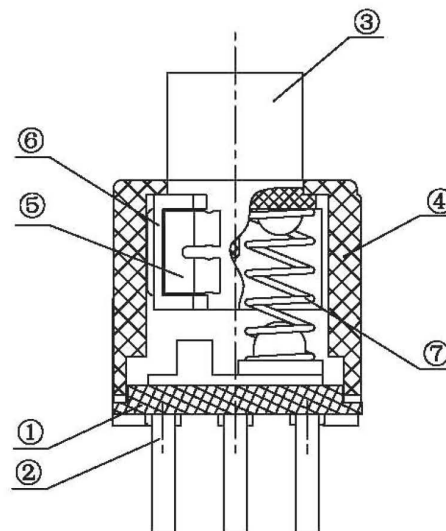
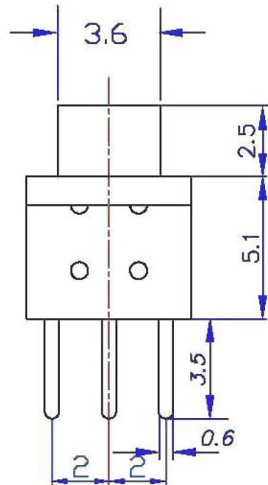


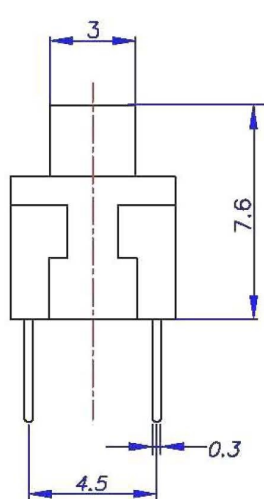

**P.C.B Layout**

**Specifications:**

1. Rating: DC 30V 0.3A
  2. Operating force: 200±80gf
  3. Corcuit: 2C-2P
  4. Stroke: Full 1.7mm  
Lock 1.0mm
  5. General tolerance: ±0.2mm
- Life: 10,000 Cycles



| Dimensions unless otherwise specified |           |
|---------------------------------------|-----------|
| Size Range                            | Tolerance |
| L ≤1                                  | ±0.15     |
| 1<L ≤8                                | ±0.20     |
| 8<L ≤23                               | ±0.25     |
| 23<L ≤50                              | ±0.30     |
| ANGAL                                 | ±1°       |

| 8   | Plating   |      | Silver plating       |                |
|-----|-----------|------|----------------------|----------------|
| 7   | Spring    | 1    | carbon steel wire    |                |
| 6   | Crochet   | 1    | Stainless Steel      |                |
| 5   | Reed      | 2    | Ag/Copper            |                |
| 4   | Cover     | 1    | PA66                 | Grey           |
| 3   | Stem      | 1    | POM                  | White          |
| 2   | Terminal  | 2    | Silver-plated copper | Silver plating |
| 1   | Case      | 1    | PA66                 | Black          |
| No. | PART NAME | Q'TY | MATERIAL             | REMARK         |

|                                            |    |      |            |       |         |      |    |                  |  |    |       |
|--------------------------------------------|----|------|------------|-------|---------|------|----|------------------|--|----|-------|
|                                            | 单位 | 比例   | 日期         | 核准    | 审核      | 设计绘图 | 料号 | SPS580F(L/N)     |  | 页数 | 1 / 1 |
|                                            | mm | Free | 2009-11-24 | Jason | William | Euni | 品名 | Push Switch      |  | 版本 | A     |
| 喜威達企業股份有限公司<br>SWEETA PRODUCTS CORPORATION |    |      |            |       |         |      |    | SPS-2216F(L/N)-K |  |    |       |